

ROW CROP AG RADIAL

WITH THE POWER OF CTR* 230/95R44 FARMAX RC 129D/132A8

FEATURE

- Higher angle and lug overlap at centre

BENEFIT

- Better roadability and stability

FEATURE

- Higher number of lugs

BENEFIT

- Superior traction

FEATURE

- Rounded shoulder

BENEFIT

- Reduced crop damage

FEATURE

- D-rated (65 kmph) tyres

BENEFIT

- Improved transportation speed

FEATURE

- Strong carcass and bead

BENEFIT

- Higher load carrying capacity




MACHINERY

2WD Tractor

4WD Tractor

MFVA (Mechanical front wheel assist)

Self propelled sprayer & towed sprayer

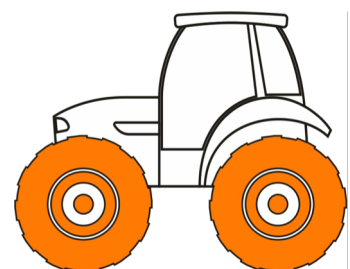

TECHNICAL SPECIFICATION

SIZE	230/95R44 (9.5R44)
PATTERN	FARMAX RC
TREAD DESIGN	TRACTOR R1
TT/TL	TL

Size	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circum	PR, Load Index	Infl. Press	Recommend load, kg (lbs)						
		SW	OD					Speed, km/h (mph)						
		mm / in	mm / in					mm / in	mm / in	Speed	bar	Field	10	25
230/95R44	W7	228	1556	735	4812	129D/ 132A8	2.8	1840	2400	1900	1750	1680	1600	1460
							41	4050	5290	4190	3850	3700	3520	3220
	W8	9.0	61.3	28.9	189.5		3.2	1990	2600	2050	1890	1820	1730	1570
							46	4380	5730	4520	4160	4010	3810	3460
	3.6	2130	2780	2190	2030		1940	1850	1680					
	52	4690	6120	4820	4470		4270	4070	3700					

All tires confirms ETRTO T&RA & STRO standards



CEAT Limited Is One Of The Leading Manufacturers Established In 1958 CEAT Is A Part Of RPG Enterprises, Among The Top 5 Business Houses In India With A Group Turn Over Of USD 2.5billion. CEAT 57 Years Of Experience, CEAT serves customers in 102 countries across 5 plants and wide range of tires in all segments like Truck Bus Bias and Radial, SUV, Passengers, 2&3 Wheelers, Floatation, Mining, Earthmover, Farm and Other Special Application off the Road Tires.