

ROW CROP AG RADIAL

WITH THE POWER OF CTR* 270/95R44 FARMAX RC 140D/143A8

FEATURE

- Higher angle and lug overlap at centre

BENEFIT

- Better roadability and stability

FEATURE

- Higher number of lugs

BENEFIT

- Superior traction

FEATURE

- Rounded shoulder

BENEFIT

- Reduced crop damage



FEATURE

- D-rated (65 kmph) tyres

BENEFIT

- Improved transportation speed

FEATURE

- Strong carcass and bead

BENEFIT

- Higher load carrying capacity


MACHINERY

2WD Tractor

4WD Tractor

MFVA (Mechanical front wheel assist)

Self propelled sprayer & towed sprayer

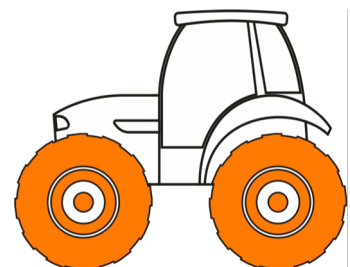

TECHNICAL SPECIFICATION

SIZE	270/95R44 (11.2R44)
PATTERN	FARMAX RC
TREAD DESIGN	TRACTOR R1
TT/TL	TL

Size	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circum	PR, Load Index	Infl. Press	Recommend load, kg (lbs)						
		SW	OD					Speed, km/h (mph)						
		mm / in	mm / in					mm / in	mm / in	Speed Symbol	bar / psi	Field	10	25
270/95R44 (11.2R44)	W9 W8 W10	275 10.8	1632 64.3	765 30.1	4948 194.8	140D/ 143A8	2.8	2330	3050	2410	2220	2130	2030	1850
							41	5130	6720	5310	4890	4690	4470	4070
							3.6	2700	3530	2780	2570	2470	2350	2140
							52	5950	7780	6120	5660	5440	5180	4710
							4	2880	3750	2960	2740	2630	2500	2280
							58	6340	8260	6520	6040	5790	5510	5020

All tires confirms ETRTO T&RA & STRO standards



CEAT Limited Is One Of The Leading Manufacturers Established In 1958 CEAT Is A Part Of RPG Enterprises, Among The Top 5 Business Houses In India With A Group Turn Over Of USD 2.5billion. CEAT 57 Years Of Experience, CEAT serves customers in 102 countries across 5 plants and wide range of tires in all segments like Truck Bus Bias and Radial, SUV, Passengers, 2&3 Wheelers, Floatation, Mining, Earthmover, Farm and Other Special Application off the Road Tires.