

# SPRAYMAX

**FEATURE**

Higher NSD

**BENEFIT**

Longer life

**FEATURE**

Advanced VF technology

**BENEFIT**

40% more load carrying capability than a standard radial

**FEATURE**

Stepped lug design

**BENEFIT**

Better grip and traction



**FEATURE**

Center tiebar

**BENEFIT**

Better roadability


**FEATURE**

Rounded shoulder

**BENEFIT**

Provides less soil and crop damage. Better grip

## MACHINERY

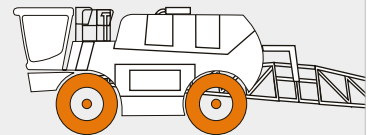

Sprayer

Size	LI/SS	Type	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
				SW	OD				MIXED APPLICATION				CYCLIC*	
				mm/in	mm/in				static	Up to 65	70	bar	10	
										Up to 40	43			psi
VF-380/ 90R50	175 D	TL	DW12 DW13	383	1954	909 35.8	5872 231.2	0.8	5750	2500	2250	1.6	3500	
				11	12670			5510	4960	22.9	7710			
				1.4	8140			3540	3190	2.2	4960			
				21	17930			7800	7030	32.1	10930			
				2.8	12240			5320	4790	3.6	7450			
				41	26960			11720	10550	52.8	16410			
				3.6	14030			6100	5490	4.4	8540			
				52	30900			13440	12090	63.7	18810			
				4.0	14950			6500	5850	4.8	9100			
				58	32930			14320	12890	69.6	20040			
				4.4	15870			6900	6210	5.2	9660			
				64	34960			15200	13680	75.8	21280			

All tires confirms ETRTO T&RA & STRO standards