

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Center tiebar

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip

MACHINERY

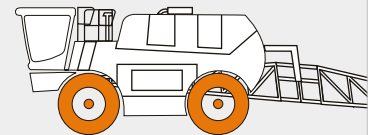

Sprayer

| Size | LI/SS | Type | Rim | Unloaded dimension | | Loaded Static Radius | Rolling Circumference | Infl. Press. | Maximum load, kg (lbs) Speed, km/h (mph) | | | | | |
|------------------|-------|------|--------------|--------------------|-------|----------------------|-----------------------|--------------|---|------|----------|-----|---------|----|
| | | | | SW | OD | | | | MIXED APPLICATION | | | | CYCLIC* | |
| | | | | mm/in | mm/in | | | | static | | Up to 65 | 70 | bar | 10 |
| | | | | | | | | | Up to 40 | 43 | psi | 6 | | |
| VF-380/ 90R54 | 176 D | TL | DW12 DW13 | 383 | 2056 | 960 37.8 | 6201 244.1 | 0.8 | 5910 | 2570 | 2310 | 1.6 | 3600 | |
| | | | | 11 | 13020 | | | 5660 | 5090 | 22.9 | 7930 | | | |
| | | | | 1.4 | 8370 | | | 3640 | 3280 | 2.2 | 5100 | | | |
| | | | | 21 | 18440 | | | 8020 | 7220 | 32.1 | 11230 | | | |
| | | | | 2.8 | 12600 | | | 5480 | 4930 | 3.6 | 7670 | | | |
| | | | | 41 | 27750 | | | 12070 | 10860 | 52.8 | 16890 | | | |
| | | | | 3.6 | 14440 | | | 6280 | 5650 | 4.4 | 8790 | | | |
| | | | | 52 | 31810 | | | 13830 | 12440 | 63.7 | 19360 | | | |
| | | | | 4.0 | 15390 | | | 6690 | 6020 | 4.8 | 9370 | | | |
| | | | | 58 | 33900 | | | 14740 | 13260 | 69.6 | 20640 | | | |
| | | | | 4.4 | 16330 | | | 7100 | 6390 | 5.2 | 9940 | | | |
| | | | | 64 | 35970 | | | 15640 | 14070 | 75.8 | 21890 | | | |

All tires confirms ETRTO T&RA & STRO standards