CEAT

GET THE ADVANTAGE THAT YOUR BUSINESS DESERVES.

CEAT SPECIALTY

COMPANY PROFILE

CEAT was established in 1924 in Turin, Italy. Today, we are one of India's leading tyre manufacturers. The brand came to India in 1958, and later became part of the RPG Group. RPG is among the top business houses in India, with a group turnover of 3 billion USD.

CEAT Limited has been conferred the prestigious Deming Prize. The Deming Prize, founded in Japan, is one of the oldest and most prestigious quality awards in the world. With this recognition, CEAT became the first tyre company in the world, outside of Japan, to have the honour of receiving this award. The Deming Prize recognises companies that achieve business transformation by implementing Total Quality Management (TQM).

CEAT Specialty is CEAT's specialised subsidiary for off highway (OTR and Agri) tyres in domestic and international markets, with a brand new plant focused on Agri-radials.

Manufacturing facilities: Directly employing 5000+ people across 7 plants in India and Sri Lanka, CEAT has a wide range of tyres for all user segments. Its range comprises tyres for commercial segments like trucks, buses, light commercial vehicles as well as passenger cars, SUVs and two & three wheeler tyres.

In the Specialty segment, CEAT manufactures farm, mining & earthmover, industrial & construction equipment tyres and special application off-road tyres.

Technology: Major commitment to research and development enables CEAT to remain at the technical forefront of the tyre industry. The company is also equipped with state-of-the-art research, design and in-house testing facilities, which has helped the company in developing tyres of the highest quality. With decades of expertise, today CEAT is capable of facing the challenging needs of customers around the world.

Market: CEAT has been exporting tyres since 1964, which has helped it in getting a firm foothold in the global market. Today CEAT tyres are put in to service in more than 115 countries across the world. CEAT enjoys a major market share in India where tyres are exposed to extreme operating conditions. In India, CEAT is one of the largest suppliers to OEMs in all major categories.

GREENFIELD PLANT

Our new greenfield plant has a robust manufacturing capacity. Catering primarily to a global Agri radial & OTR market, the plant is spread across a 50-acre plot. High-end equipment with a strong and experienced project team are the hallmarks of this plant. This new plant has automated machinery and is run by Self-Managed Teams.

INDEX

CATEGORY INDEX

APPLICATION	RADIAL/BIAS	PATTERN NAME	PAGE NO.
TRACTOR	RADIAL	FARMAX R85	21-29
		FARMAX R80	29-30
		FARMAX R70	31-38
		FARMAX R90	38
		FARMAX R65	40-46
		TORQUEMAX	50
		FARMAX HPT	52
		FARMAX RC	52-57
	BIAS	FARMAX F2	58
		FARMAX F2M	60
		SAMRAAT F2	61
		AAYUSHMAAN F2	62
		FARMAX R1	64-65
		SAMRAAT PLUS R1	66
		SAMRAAT SUPER R1	67
		AAYUSHMAAN R1	68
		AAYUSHMAAN R2	69
HARVESTER	RADIAL	YIELDMAX	73
	BIAS	SAMRAAT SUPER XL	74
		AAYUSHMAAN	75
FLOTATION	RADIAL	FLOATMAX FT	79
	BIAS	FLOTATION T422	81
		T422 VALUE PRO	83
		TR800	84
		FLOTATION PLUS	85
		FLOTATION TX440	86
IMPLEMENT	BIAS	FARM IMPLEMENT I1	88
		FARM IMPLEMENT AWI305	89
		FARM IMPLEMENT 404	90
IRROGATOR	BIAS	IRROGATOR	92

AGRO-INDUSTRIAL/ MULTIUSE	RADIAL	LIFT PRO	75
OTR INDUSTRIAL	BIAS	LIFT PRO	100
		MPT 503	101
		MPT 602	103
		MPT 800	104
		LOADER PRO	105
		LOADER PRO HD	106
		GRIP MASTER LOADER HD	107
		GRIP X HD	108
OTR MINING	BIAS	ROCK XL E4/L4	110
		TRAC XL E3/L3	111
		GRIP MASTER XL E4/L4	112
		SLICK 431	113
		SLICK 404	114
OTR CONSTRUCTION	BIAS	C305 R3	116
		TYROCK	117
		TYROCK XL R4	118
		LOADER XL G2/L2	119
		GRADER XL PLUS (G2/L2)	120
		GRADER XL G2/L2	121
OTR PORT	BIAS	PORT PRO RX IND4	124
		PORT PRO TX IND3	125
		PORT PRO SL IND4	126
		ROCK XL IND3	110
		SLICK 404 L5S	128
		SLICK 431 L4S	113
		PORT XL PLUS IND4.5	130
		GRIP MASTER ND IND3	131
		PORT PRO SL IND5	126

TYRE CARE & USAGE MANUAL

GENERAL INFORMATION	134
TYRE DESCRIPTION & NOMENCLATURE	135-137
LOAD INDEX & SPEED SYMBOL	138
RMA CODE	139
CONVERSION TABLE	140
TYRE CARE & MAINTENANCE GUIDELINES	141-153
SKU CODE INDEX	155-166

• Images are for representative purposes only.
• Technical specifications are subject to change without prior notice.
Claim available on CEAT Assist app.

RADIAL PATTERN INDEX

Rim Diameter	Tyre Size	Pattern	Page No.
20	250/85 R 20	FARMAX R85	21
	280/85 R 20	FARMAX R85	21
	320/85 R 20	FARMAX R85	21
	260/70 R 20	FARMAX R70	31
	280/70 R 20	FARMAX R70	31
	300/70 R 20	FARMAX R70	31
	320/70 R 20	FARMAX R70	31-32
	360/70 R 20	FARMAX R70	32
	380/70 R 20	FARMAX R70	32
	340/65 R 20	FARMAX R65	40
	420/65 R 20	FARMAX R65	40
	440/65 R 20	FARMAX R65	40
22.5	560/45 R 22.5	FLOATMAX FT	79
	560/60 R 22.5	FLOATMAX FT	79
	600/50 R 22.5	FLOATMAX FT	79
24	250/85 R 24	FARMAX R85	21
	280/85 R 24	FARMAX R85	21
	320/85 R 24	FARMAX R85	22
	340/85 R 24	FARMAX R85	22
	380/85 R 24	FARMAX R85	22
	420/85 R 24	FARMAX R85	22
	320/70 R 24	FARMAX R70	33
	360/70 R 24	FARMAX R70	33
	380/70 R 24	FARMAX R70	33
	420/70 R 24	FARMAX R70	33
	480/70 R 24	FARMAX R70	33
	420/65 R 24	FARMAX R65	40
	440/65 R 24	FARMAX R65	40-41
	480/65 R 24	FARMAX R65	41
	540/65 R 24	FARMAX R65	41
	460/70 R 24	LIFT PRO	75
26	620/75 R26	YIELDMAX	73
26.5	600/55 R 26.5	FLOATMAX FT	79

Rim Diameter	Tyre Size	Pattern	Page No.
28	250/85 R 28	FARMAX R85	23
	280/85 R 28	FARMAX R85	23
	320/85 R 28	FARMAX R85	23
	340/85 R 28	FARMAX R85	23
	380/85 R 28	FARMAX R85	23
	420/85 R 28	FARMAX R85	24
	320/70 R 28	FARMAX R70	34
	360/70 R 28	FARMAX R70	34
	380/70 R 28	FARMAX R70	34
	420/70 R 28	FARMAX R70	34
	480/70 R 28	FARMAX R70	34-35
	600/70 R 28	FARMAX R70	36
	440/65 R 28	FARMAX R65	42
	480/65 R 28	FARMAX R65	42
	540/65 R 28	FARMAX R65	42
	600/65 R 28	FARMAX R65	43
30	380/85 R 30	FARMAX R85	24
	420/85 R 30	FARMAX R85	24
	460/85 R 30	FARMAX R85	24
	420/70 R 30	FARMAX R70	35
	480/70 R 30	FARMAX R70	35
	520/70 R 30	FARMAX R70	36
	600/70 R 30	FARMAX R70	36
	540/65 R 30	FARMAX R65	43
	600/65 R 30	FARMAX R65	43
	420/90 R 30	FARMAX R90	38
32	210/95 R 32	FARMAX RC	52
	230/95 R 32	FARMAX RC	52
	270/95 R 32	FARMAX RC	52
	320/85 R 32	FARMAX R85	25
	650/75 R 32	YIELDMAX	73

Rim Diameter	Tyre Size	Pattern	Page No.
34	320/85 R 34	FARMAX R85	25
	380/85 R 34	FARMAX R85	25
	420/85 R 34	FARMAX R85	25-26
	460/85 R 34	FARMAX R85	26
	480/70 R 34	FARMAX R70	36
	520/70 R 34	FARMAX R70	36
	540/65 R 34	FARMAX R65	44
	600/65 R 34	FARMAX R65	44
36	230/95 R 36	FARMAX RC	52
	270/95 R 36	FARMAX RC	52
	320/85 R 36	FARMAX R85	26
	340/85 R 36	FARMAX R85	26
38	270/95 R 38	FARMAX RC	53
	320/85 R 38	FARMAX R85	27
	340/85 R 38	FARMAX R85	27
	420/85 R 38	FARMAX R85	27
	460/85 R 38	FARMAX R85	27-28
	520/85 R 38	FARMAX R85	28
	380/80 R 38	FARMAX R80	29
	480/70 R 38	FARMAX R70	37
	520/70 R 38	FARMAX R70	37
	580/70 R 38	FARMAX R70	37
	710/70 R 38	FARMAX R70	37
	540/65 R 38	FARMAX R65	44-45
	600/65 R 38	FARMAX R65	45
	650/65 R 38	FARMAX R65	45
	650/85 R 38	TORQUEMAX	50
	650/85 R 38	TORQUEMAX	50
40	230/95 R 40	FARMAX RC	53

Rim Diameter	Tyre Size	Pattern	Page No.
42	230/95 R 42	FARMAX RC	53
	270/95 R 42	FARMAX RC	53
	320/80 R 42	FARMAX RC	54
	320/90 R 42	FARMAX RC	54
	480/80 R 42	FARMAX R80	30
	520/85 R 42	FARMAX R85	28
	650/65 R 42	FARMAX R65	45-46
	580/70 R 42	FARMAX R70	38
	620/70 R 42	FARMAX R70	38
	710/70 R 42	FARMAX R70	38
44	230/95 R 44	FARMAX RC	54
	270/95 R 44	FARMAX RC	54
46	270/95 R 46	FARMAX RC	55
	300/95 R 46	FARMAX RC	55-56
	340/85 R 46	FARMAX RC	55
	380/90 R 46	FARMAX RC	55
	420/80 R 46	FARMAX R80	30
	480/80 R 46	FARMAX R80	30
	520/85 R 46	FARMAX R85	29
48	230/95 R 48	FARMAX RC	56
	270/95 R 48	FARMAX RC	56
	340/85 R 48	FARMAX RC	56
50	320/90 R 50	FARMAX RC	57
	380/90 R 50	FARMAX RC	57
	380/90 R 50	FARMAX RC	57
	480/80 R 50	TORQUEMAX	50
	480/80 R 50	TORQUEMAX	50

BIAS PATTERN INDEX

FARM CATEGORY

Rim Dia	Tyre Size	Pattern	Page	Pattern	Page	Pattern	Page	Pattern	Page
15	5.00-15	FARMAX F2	58						
	7.60-15	FARM IMPLEMENT I1	88						
	9.5L-15	FARM IMPLEMENT I1	88	FARMAX F2M	60				
	11L-15	FARM IMPLEMENT I1	88	FARMAX F2M	60				
	12.5L-15	FARM IMPLEMENT I1	88						
15.3	10.0/75-15.3	FARM IMPLEMENT AWI305	89						
	11.5/80-15.3	FARM IMPLEMENT AWI305	89						
	12.5/80-15.3	FARM IMPLEMENT AWI305	89						
15.5	400/60-15.5	TR800	84						
16	5.50-16	FARMAX F2	58						
	6.00-16	FARMAX F2	58	AAYUSHMAAN F2	62	SAMRAAT F2	61		
	6.50-16	FARMAX F2	58						
	7.50-16	FARMAX F2	58	AAYUSHMAAN F2	62	SAMRAAT F2	61		
	10.00-16	FARMAX F2	58	FARMAX F2M	60				
	11.00-16	FARMAX F2	58	FARMAX F2M	60				
17	15/55-17	FARM IMPLEMENT 404	90						
	500/50-17	FLOTATION T422	81	FLOTATION PLUS	85	FARM IMPLEMENT 404	90		
	480/45-17	FLOTATION PLUS	85						
18	7.50-18	FARMAX F2	58						
	8.00-18	AAYUSHMAAN R1	70						
19	4.00-19	FARMAX F2	58						
20	7.50-20	FARMAX F2	58						
	6.50-20	AAYUSHMAAN F2	62	SAMRAAT F2	61				
22.5	400/55-22.5	T422 VALUE PRO	83						
	500/60-22.5	FLOTATION T422	81	T422 VALUE PRO	83	TX440	86		
	500/45-22.5	T422 VALUE PRO	83						
	550/45-22.5	FLOTATION T422	81	T422 VALUE PRO	83				
	550/60-22.5	FLOTATION T422	81	T422 VALUE PRO	83	TX440	86		
	600/50-22.5	FLOTATION T422	81			TX440	86		
	600/55-22.5	FLOTATION T422	81						
	700/40-22.5	FLOTATION T422	81			TX440	86		
	700/50-22.5	FLOTATION T422	81						

Rim Dia	Tyre Size	Pattern	Page	Pattern	Page	Pattern	Page	Pattern	Page
24	8.3-24	FARMAX R1	64	SAMRAAT SUPER R1	67	AAYUSHMAAN R1	68		
	9.5-24	FARMAX R1	64						
	11.2-24	FARMAX R1	64	IRROGTAOR	92				
	12.4-24	FARMAX R1	64	SAMRAAT SUPER R1	67				
	13.6-24	FARMAX R1	64						
	14.9-24	FARMAX R1	64	IRROGTAOR	92				
	15.5/80-24	LIFT PRO	100						
	16.9-24	FARMAX R1	64						
26	18.4-26	FARMAX R1	64						
26.5	600/55-26.5	FLOTATION T422	81						
	700/50-26.5	FLOTATION T422	81						
	800/45-26.5	FLOTATION T422	81						
28	11.2-28	FARMAX R1	64						
	12.4-28	FARMAX R1	64	SAMRAAT SUPER R1	67	AAYUSHMAAN R1	68	AAYUSHMAAN R2	69
	13.6-28	FARMAX R1	65	SAMRAAT SUPER R1	67	AAYUSHMAAN R1	68		
	14.9-28	FARMAX R1	65	SAMRAAT SUPER R1	67	AAYUSHMAAN R1	68		
	16.9-28	FARMAX R1	65	SAMRAAT PLUS R1	66	AAYUSHMAAN R1	68		
30	16.9-30	FARMAX R1	65	HARVESTER AAYUSHMAAN	75				
	18.4-30	FARMAX R1	65	HARVESTER SAMRAAT SUPER XL	74	HARVESTER AAYUSHMAAN	75	AAYUSHMAAN HD	72
34	18.4-34	FARMAX R1	65						
36	13.6-36	FARMAX R1	65						
38	11.2-38	IRROGTAOR	92						
	13.6-38	FARMAX R1	65						
	15.5-38	FARMAX R1	65	AAYUSHMAAN R1	68				
	16.9-38	FARMAX R1	65						
	18.4-38	FARMAX R1	65						

BIAS PATTERN INDEX

OTR CATEGORY

Rim Diameter	Tyre Size	Pattern	Page4	Pattern	Page	Pattern	Page
16.5	10-16.5	LOADER PRO	105	GRIP MASTER LOADER HD	107	GRIP X HD	108
	12-16.5	LOADER PRO	105	GRIP MASTER LOADER HD	107	GRIP X HD	108
17.5	14-17.5	LOADER PRO HD	106				
18	12.5/80 - 18	TYROCK	117				
	12.5 -18	MPT 602	103				
19.5	15-19.5	LOADER PRO HD	106				
	18-19.5	MPT 503 TL	101				
20	9.00 - 20	SLICK 431	113				
	10.00 - 20	MPT 602	103				
	12.0 - 20	SLICK 404	114	SLICK 404 L5S	128		
	12.5 - 20	MPT 602	103				
	405/70-20 (16.0/70-20)	MPT 602	103	MPT 800	104		
	14.00 - 20	TRAC XL E3/L3	111				
22.5	18-22.5	MPT 503 TL 16PR	101				
24	12.00 - 24	SLICK 404	114	PORT PRO RX IND4	124	SLICK 404 L5S	128
	13.00 - 24	GRADER XL PLUS (G2/L2)	120	GRADER XL G2/L2	121		
	14.00 - 24	GRADER XL G2/L2	121	GRIP MASTER ND IND3	131		
	15.5/80 - 24	LIFT PRO	100				
	19.5L - 24	TYROCK XL R4	118				
	405/70-24 (16.0/70-24)	MPT 602	103	MPT 800	104		
25	15.5 - 25	LOADER XL G2/L2	119				
	16.00 - 25	SLICK 431 L4S	129	ROCK XL IND 3	110		
	17.5 - 25	TRAC XL E3/L3	111	SLICK 404	114		
	17.5 - 25	LOADER XL G2/L2	119	SLICK 404 L5S	128		
	18.00 - 25	ROCK XL E4/L4	110	GRIP MASTER XL E4/L4	112	PORT PRO TX IND3	125
	18.00 - 25	PORT PRO SL	126	PORT PRO RX IND4	124	PORT XL PLUS IND4.5	130
	18.00 - 25	GRIP MASTER ND IND3	131	PORT PRO SL IND5	132	SLICK 404	114
	18.00 - 25	SLICK 404 L5S	128				
	20.5 - 25	TRAC XL E3/L3	111	LOADER XL G2/L2	119		
	21.0 - 25	PORT PRO TX IND3	125				
	23.5 - 25	TRAC XL E3/L3	111				
	26.5 - 25	TRAC XL E3/L3	111				
	29.5 - 25	TRAC XL E3/L3	111				
26	23.1 - 26	C305 R3	116				
28	16.9 - 28	TYROCK XL R4	118				
33	18.00-33	ROCK XL E4/L4	110	PORT PRO RX IND4	124	PORT PRO SL	126
35	21.00-35	ROCK XL E4/L4	110	PORT PRO TX IND3	125		
	24.00-35	ROCK XL E4/L4	110				

TRACTOR

FARMAX R80/R85 (R)

FARMAX R70 (R)

FARMAX R65 (R)

TORQUEMAX

FARMAX RC (R)

FARMAX R1 (B)

SAMRAAT PLUS R1 (B)

SAMRAAT SUPER R1 (B)

AAYUSHMAAN R1 (B)

AAYUSHMAAN R2 (B)

TRACTOR FRONT

FARMAX F2 (B)

FARMAX F2M (B)

SAMRAAT F2 (B)

AAYUSHMAAN F2 (B)

HARVESTER

YIELDMAX

SAMRAAT SUPER XL (B)

AAYUSHMAAN (B)

FLOTATION

FLOATMAX FT (R)

FLOTATION T422 (B)

T422 VALUE PRO (B)

TR800 (B)

The images used are for representation purpose only

The images used are for representation purpose only

FLOTATION PLUS (B) | FLOTATION TX440 (B)

IMPLEMENT

FARM IMPLEMENT I1 (B) | FARM IMPLEMENT AW1305 (B) | FARM IMPLEMENT 404 (B)

IRROGATOR

IRROGATOR (B) | IRROGATOR R1 (B)

AGRO INDUSTRIAL/ MULTIUSE

LIFT PRO (B) | MPT 602 (B) | MPT 800 (B)

SKID STEER

LOADER PRO (B) | LOADER PRO HD (B) | GRIP X HD (B)

The images used are for representation purpose only

The images used are for representation purpose only

OTR BIAS

LOADER XL G2/L2 | GRADER XL PLUS | GRADER XL G2/L2L2E4/L4 | LOADER PRO

LOADER PRO HD | GRIP X HD | PORT PRO RX IND4 | PORT PRO TX IND3

PORT PRO SL IND4 | ROCK XL IND3 | SLICK 404 L5S | SLICK 431 L4S

PORT XL PLUS IND4.5 | GRIP MASTER XL E4/L4 | PORT PRO SL IND5 | MPT 503

The images used are for representation purpose only

The images used are for representation purpose only

TABLE HEADER

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed kmph mph					
			SW	OD				Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs					

LI- LOAD INDEX
SS- SPEED SYMBOL

SECTION WIDTH

OVERALL DIAMETER

STATIC LOADED RADIUS

ROLLING CIRCUMFERENCE

INFLATION PRESSURE

SPEED INDICATION

TRACTOR RADIAL

85/80/70 SERIES AGRI RADIAL

WITH THE POWER OF CTR*

FEATURE
- R1-W tread depth

BENEFIT
- Longer tyre life

FEATURE
- Rounded shoulder

BENEFIT
- Lesser damage to soil and crop

FEATURE
- Higher angle and lug overlap at centre

BENEFIT
- Better roadability

FEATURE
- Lower angle at shoulder

BENEFIT
- Superior traction

FEATURES
- Wider tread
- Larger inner volume

BENEFIT
- Reduced soil compaction

*CTR-Low Compaction, High Traction, High Roadability

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
								Maximum Load kg lbs					
FARMAX R 85													
R 20													
250/85 R 20	116 A8/B	**W8** W7 W9	250 9.84	933 36.73	424 16.71	2755 108.5	1.8 26	2440 5370	1590 3500	1300 2860	1130 2860	1060 2330	1060 2330
							2 29	2600 5730	1700 3740	1390 3060	1390 3060	1130 2490	1130 2490
							2.2 32	2740 6040	1790 3940	1460 3220	1460 3220	1190 2620	1190 2620
							2.4 35	2880 6340	1880 4140	1540 3390	1540 3390	**1250 2750**	1250 2750
280/85 R 20 (11.2 R 20)	112 A8/B	**W10** W9	285 11.2	984 38.7	447 17.6	2914 114.7	0.8 12	1730 3810	1130 2490	920 2030	800 1760	750 1650	750 1650
							1 15	1960 4320	1280 2820	1050 2310	910 2000	850 1870	850 1870
							1.3 19	2280 5020	1490 3280	1220 2690	1060 2330	990 2180	990 2180
							1.6 23	2580 5680	1680 3700	1380 3040	1200 2640	**1120 2470**	1120 2470
320/85 R 20 (12.4 R 20)	119 A8/B	W10 **W11** W9	320 12.6	1052 41.4	474 18.7	3102 122.1	0.8 12	2090 4600	1370 3020	1120 2470	970 2140	910 2000	910 2000
							1 15	2370 5220	1550 3410	1270 2800	1100 2420	1030 2270	1030 2270
							1.3 19	2760 6080	1800 3960	1480 3260	1280 2820	1200 2640	1200 2640
							1.6 23	3130 6890	2040 4490	1670 3680	1460 3220	**1360 3000**	1360 3000
R 24													
250/85 R 24 (9.5 R 24)	109 A8/B	**W8** W7 W9	250 9.8	1036 40.8	477 18.8	3097 121.9	0.8 12	1590 3500	1040 2290	850 1870	740 1630	690 1520	690 1520
							1 15	1790 3940	1170 2580	960 2110	830 1830	780 1720	780 1720
							1.3 19	2090 4600	1370 3020	1120 2470	970 2140	910 2000	910 2000
							1.6 23	2370 5220	1550 3410	1270 2800	1100 2420	**1030 2270**	1030 2270
280/85 R 24 (11.2 R 24)	115 A8/B	**W10** W9	285 11.2	1086 42.8	498 19.6	3235 127.4	0.8 12	1860 4100	1220 2690	1000 2200	870 1920	810 1780	810 1780
							1 15	2120 4670	1380 3040	1130 2490	980 2160	920 2030	920 2030
							1.3 19	2480 5460	1620 3570	1330 2930	1160 2560	1080 2380	1080 2380
							1.6 23	2790 6150	1820 4010	1490 3280	1300 2860	**1215 2680**	1215 2680

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31	65 40
								Maximum Load kg lbs						
320/85 R 24 (12.4 R 24)	122 A8/B	**W11** W10 W9	325 12.8	1154 45.4	525 20.7	3423 134.8	0.8 12	2300 5070	1500 3300	1230 2710	1070 2360	1000 2200	1000 2200	-
							1 15	2620 5770	1710 3770	1400 3080	1220 2690	1140 2510	1140 2510	-
							1.3 19	3060 6740	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930	-
							1.6 23	3450 7600	2250 4960	1850 4070	1610 3550	**1500 3300**	1500 3300	-
320/85 R 24 (12.4 R 24)	142 A8/B	**W11** W10 W9	325 12.8	1154 45.4	525 20.7	3423 134.8	3 44	4990 10990	3260 7180	2670 5880	2320 5110	2170 4780	2170 4780	-
							3.4 49	5380 11850	3510 7730	2880 6340	2500 5510	2340 5150	2340 5150	-
							3.8 55	5750 12670	3750 8260	3080 6780	2680 5900	2500 5510	2500 5510	-
							4.2 61	6100 13440	3980 8770	3260 7180	2840 6260	**2650 5840**	2650 5840	-
340/85 R 24 (13.6 R 24)	125 A8/B	**W12** W11	355 14	1188 46.8	542 21.3	3528 138.9	0.8 12	2530 5570	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420	-
							1 15	2880 6340	1880 4140	1540 3390	1340 2950	1250 2750	1250 2750	-
							1.3 19	3360 7400	2190 4820	1800 3960	1560 3440	1460 3220	1460 3220	-
							1.6 23	3800 8370	2480 5460	2030 4470	1770 3900	**1650 3630**	1650 3630	-
340/85 R 24 (13.6 R 24)	125 D / 128 A8/B	**W12** W11	355 14	1188 46.8	542 21.3	3528 138.9	0.8 12	2530 5570	1650 3630	1350 2970	1270 2800	1200 2420	1160 2560	1100 2420
							1 15	2880 6340	1880 4140	1540 3390	1440 3170	1370 2750	1310 2890	1250 2750
							1.3 19	3360 7400	2190 4820	1800 3960	1680 3700	1600 3220	1530 3370	1460 3220
							1.6 23	3800 8370	2480 5460	2030 4470	1900 4190	1810 3990	1730 3810	**1650 3630**
380/85 R 24 (13.6 R 24)	125 D / 128 A8/B	**W12** W13 W11	380 15	1190 46.9	540 21.3	3523 138.7	0.8 12	2990 6590	1950 4300	1600 3520	1500 3300	1420 2860	1370 3020	1300 2860
							1 15	3400 7490	2220 4890	1820 4010	1700 3740	1620 3260	1550 3410	1480 3260
							1.3 19	3980 8770	2600 5730	2130 4690	1990 4380	1890 3810	1820 4010	1730 3810
							1.6 23	4490 9890	2930 6450	2400 5290	2240 4930	2140 4710	2050 4520	**1950 4300**
380/85 R 24 (14.9 R 24)	131 A8/B	**W12** W13 W11	385 15.2	1260 49.6	571 22.5	3728 146.8	0.8 12	2990 6590	1950 4300	1600 3520	1390 3060	1300 2860	1300 2860	-
							1 15	3400 7490	2220 4890	1820 4010	1580 3480	1480 3260	1480 3260	-
							1.3 19	3980 8770	2600 5730	2130 4690	1850 4070	1730 3810	1730 3810	-
							1.6 23	4490 9890	2930 6450	2400 5290	2090 4600	**1950 4300**	1950 4300	-

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
								Maximum Load kg lbs					
420/85 R 24 (16.9 R 24)	137 A8/B	**W15L** W14L W13	450 17.7	1324 52.1	597 23.5	3906 153.8	0.8 12	3520 7750	2300 5070	1880 4140	1640 3610	1530 3370	1530 3370
							1 15	4030 8880	2630 5790	2150 4740	1870 4120	1750 3850	1750 3850
							1.3 19	4690 10330	3060 6740	2510 5530	2180 4800	2040 4490	2040 4490
							1.6 23	5290 11650	3450 7600	2830 6230	2460 5420	**2300 5070**	2300 5070
R 28 250/85 R 28	112 A8/B	**W8** W7 W9	250 9.84	1137 44.76	526 20.72	3340 131.5	0.8 12	1730 3810	1130 2490	920 2030	800 1760	750 1650	750 1650
							1 15	1960 4320	1280 2820	1050 2310	910 2000	850 1870	850 1870
							1.3 10	2280 5020	1490 3280	1220 2690	1060 2330	990 2180	990 2180
							1.6 23	2580 5680	1680 3700	1380 3040	1200 2640	**1120 2470**	1120 2470
280/85 R 28 (11.2 R 28)	118 A8/B	**W10** W9	285 11.2	1187 46.7	548 21.6	3553 139.9	0.8 12	2020 4450	1320 2910	1080 2380	940 2070	880 1940	880 1940
							1 15	2300 5070	1500 3300	1230 2710	1070 2360	1000 2200	1000 2200
							1.3 19	2690 5930	1760 3880	1440 3170	1250 2750	1170 2580	1170 2580
							1.6 23	3040 6700	1980 4360	1620 3570	1410 3110	**1320 2910**	1320 2910
320/85 R 28 (12.4 R 28)	124 A8/B	**W11** W10 W9	330 13.0	1255 49.4	574 22.6	3698 145.6	0.8 12	2460 5420	1610 3550	1320 2910	1140 2510	1070 2360	1070 2360
							1 15	2810 6190	1830 4030	1500 3300	1310 2890	1220 2690	1220 2690
							1.3 19	3270 7200	2130 4690	1750 3850	1520 3350	1420 3130	1420 3130
							1.6 23	3680 8110	2400 5290	1970 4340	1710 3770	**1600 3520**	1600 3520
340/85 R 28 (13.6 R 28)	127 A8/B	**W12** W11	355 14	1289 50.7	592 23.3	3846 151.4	0.8 12	2690 5930	1760 3880	1440 3170	1250 2750	1170 2580	1170 2580
							1 15	3060 6740	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
							1.3 19	3570 7860	2330 5130	1910 4210	1660 3660	1550 3410	1550 3410
							1.6 23	4030 8880	2630 5790	2150 4740	1870 4120	**1750 3850**	1750 3850
380/85 R 28 (14.9 R 28)	133 A8/B	**W12** W13 W11	390 15.4	1357 53.4	620 24.4	4035 158.9	0.8 12	3150 6940	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
							1 15	3590 7910	2340 5150	1920 4230	1670 3680	1560 3440	1560 3440
							1.3 19	4190 9230	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010
							1.6 23	4740 10440	3090 6810	2530 5570	2200 4850	**2060 4540**	2060 4540

These are tubeless tyres

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31	65 40
								Maximum Load kg lbs						
380/85 R 28	133 D / 136 A8/B	**W12** W13 W11	390 15.4	1357 53.4	620 24.4	4035 158.9	0.8 12	3150 6940	2060 4540	1690 3720	1580 3480	1500 3020	1440 3170	1370 3020
							1 15	3590 7910	2340 5150	1920 4230	1790 3940	1710 3440	1640 3610	1560 3440
							1.3 19	4190 9230	2730 6010	2240 4930	2090 4600	1990 4010	1910 4210	1820 4010
							1.6 23	4740 10440	3090 6810	2530 5570	2370 5220	2260 4980	2160 4760	**2060 4540**
420/85 R 28 (16.9 R 28)	139 A8/B	**W15L** W14L W13	450 17.7	1425 56.1	648 25.5	4224 166.3	0.8 12	3730 8220	2430 5350	1990 4380	1730 3810	1620 3570	1620 3570	-
							1 15	4260 9380	2780 6120	2280 5020	1980 4360	1850 4070	1850 4070	-
							1.3 19	4950 10900	3230 7110	2640 5810	2300 5070	2150 4740	2150 4740	-
							1.6 23	5590 12310	3650 8040	2990 6590	2600 5730	**2430 5350**	2430 5350	-
R 30 380/85 R 30 (14.9 R 30)	135 A8/B	**W12** W13 W11	385 15.2	1408 55.4	646 25.4	4195 165.2	0.8 12	3340 7360	2180 4800	1780 3920	1550 3410	1450 3190	1450 3190	-
							1 15	3820 8410	2490 5480	2040 4490	1780 3920	1660 3660	1660 3660	-
							1.3 19	4440 9780	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250	-
							1.6 23	5010 11040	3270 7200	2680 5900	2330 5130	**2180 4800**	2180 4800	-
420/85 R 30	140D / 143 A8/B	**W15L** W14L W13	450 17.7	1476 58.1	673 26.5	4385 172.6	0.8 12	3840 8460	2510 5530	2050 4520	1920 4230	1830 3680	1750 3850	1670 3680
							1 15	4370 9630	2850 6280	2340 5150	2190 4820	2080 4190	2000 4410	1900 4190
							1.3 19	5080 11190	3320 7310	2720 5990	2540 5590	2420 4870	2320 5110	2210 4870
							1.6 23	5750 12670	3750 8260	3080 6780	2880 6340	2740 6040	2630 5790	**2500 5510**
420/85 R 30 (16.9 R 30)	140 A8/B	**W15L** W14L W13	450 17.7	1476 58.1	673 26.5	4385 172.6	0.8 12	3840 8460	2510 5530	2050 4520	1790 3940	1670 3680	1670 3680	-
							1 15	4370 9630	2850 6280	2340 5150	2030 4470	1900 4190	1900 4190	-
							1.3 19	5080 11190	3320 7310	2720 5990	2360 5200	2210 4870	2210 4870	-
							1.6 23	5750 12670	3750 8260	3080 6780	2680 5900	**2500 5510**	2500 5510	-
420/85 R 30 (16.9 R 30)	147 A8/B	**W15L** W14L W13	450 17.7	1476 58.1	673 26.5	4385 172.6	1.8 26	5980 13170	3900 8590	3200 7050	2780 6120	2600 5730	2600 5730	-
							2 29	6350 13990	4140 9120	3390 7470	6120 2950	2760 6080	2760 6080	-
							2.2 32	6720 14800	4380 9650	3590 7910	6500 3120	2920 6430	2920 6430	-
							2.4 35	7070 15570	4610 10150	3780 8330	3290 7250	**3075 6770**	3075 6780	-

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
								Maximum Load kg lbs					
460/85 R 30 (18.4 R 30)	145 A8/B	**W16L** W15L W14L	480 18.9	1544 60.8	701 27.6	4574 180.1	0.8 12	4440 9780	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250
							1 15	5060 11150	3300 7270	2710 5970	2350 5180	2200 4850	2200 4850
							1.3 19	5910 13020	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
							1.6 23	6670 14690	4350 9580	3570 7860	3100 6830	**2900 6390**	2900 6390
R 32 320/85 R 32 (12.4 R 32)	126 A8/B	**W11** W10 W9	325 12.8	1357 53.4	627 24.7	4062 159.9	0.8 12	2600 5730	1700 3740	1390 3060	1210 2670	1130 2490	1130 2490
							1 15	2970 6540	1940 4270	1590 3500	1380 3040	1290 2840	1290 2840
							1.3 19	3470 7640	2270 5000	1860 4100	1620 3570	1510 3330	1510 3330
							1.6 23	3910 8610	2550 5620	2090 4600	1820 4010	**1700 3740**	1700 3740
320/85 R 32 (12.4 R 32)	142 A8/B	**W11** W10 W9	325 12.8	1357 53.4	627 24.7	4062 160	3 44	5150 11340	3360 7400	2760 6080	2400 5290	2240 4930	2240 4930
							3.4 49	5540 12200	3620 7970	2960 6520	2580 5680	2410 5310	2410 5310
							3.8 55	5910 13020	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
							4 58	6100 13440	3980 8770	3260 7180	2840 6260	**2650 5840**	2650 5840
320/85 R 32	145 A8/B	**W11** W10 W9	325 12.8	1357 53.4	627 24.7	4062 160	0.8 12	2460 5420	1610 3550	1320 2910	1140 2510	1070 2360	1070 2360
							1.2 17	3130 6890	2040 4490	1670 3680	1460 3220	1360 3000	1360 3000
							1.6 23	3700 8150	2420 5330	1980 4360	1720 3790	1610 3550	1610 3550
							2.4 35	4690 10330	3060 6740	2510 5530	2180 4800	2040 4490	2040 4490
							3.6 52	5930 13060	3870 8520	3170 6980	2760 6080	2580 5680	2580 5680
							4 58	6300 13880	4110 9050	3370 7420	2930 6450	2740 6040	2740 6040
							4.4 64	6670 14690	4350 9580	3570 7860	3100 6830	**2900 6390**	2900 6390
R 34 320/85 R 34 (12.4 R 34)	141 A8/B	**W11** W10 W9	325 12.8	1408 55.4	650 25.6	4222 166.2	2.8 41	5110 11260	3330 7330	2730 6010	2380 5240	2220 4890	2220 4890
							3.2 46	5520 12160	3600 7930	2950 6500	2570 5660	2400 5290	2400 5290
							3.6 52	5920 13040	3860 8500	3170 6980	2760 6080	**2575 5670**	2580 5680

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31	65 40
								Maximum Load kg lbs						
380/85 R 34 (14.9 R 34)	137 A8/B	**W12** W13 W11	385 15.2	1510 59.4	697 27.4	4516 177.8	0.8 12	3520 7750	2300 5070	1880 4140	1640 3610	1530 3370	1530 3370	-
							1 15	4030 8880	2630 5790	2150 4740	1870 4120	1750 3850	1750 3850	-
							1.3 19	4690 10330	3060 6740	2510 5530	2180 4800	2040 4490	2040 4490	-
							1.6 23	5290 11650	3450 7600	2830 6230	2460 5420	**2300 5070**	2300 5070	-
420/85 R 34 (16.9 R 34)	142 A8/B	**W15L** W14L W13	450 17.7	1578 62.1	724 28.5	4705 185.3	0.8 12	4070 8960	2660 5860	2180 4800	1890 4160	1770 3900	1770 3900	-
							1 15	4620 10180	3020 6650	2470 5440	2150 4740	2010 4430	2010 4430	-
							1.3 19	5410 11920	3530 7780	2890 6370	2510 5530	2350 5180	2350 5180	-
							1.6 23	6100 13440	3980 8770	3260 7180	2840 6260	**2650 5840**	2650 5840	-
420/85 R 34	142 D / 145 A8/B	**W15L** W14L W13	450 17.7	1578 62.1	724 28.5	4705 185.3	0.8 12	4070 8960	2660 5860	2180 4800	2040 4490	1940 3900	1860 4100	1770 3900
							1.2 17	5150 11340	3360 7400	2760 6080	2580 5680	2450 4930	2350 5180	2240 4930
							1.4 20	5640 12420	3680 8110	3010 6630	2820 6210	2680 5400	2570 5660	2450 5400
							1.6 23	6100 13440	3980 8770	3260 7180	3050 6720	2900 6390	2780 6120	**2650 5840**
420/85 R 34 (16.9 R 34)	147 A8/B	**W15L** W14L W13	450 17.7	1578 62.1	724 28.5	4705 185.3	1.3 19	4950 10900	3230 7110	2640 5810	2300 5070	2150 4740	2150 4740	-
							1.6 23	5590 12310	3650 8040	2990 6590	2600 5730	2430 5350	2430 5350	-
							2 29	6350 13990	4140 9120	3390 7470	2950 6500	2760 6080	2760 6080	-
							2.4 35	7070 15570	4610 10150	3780 8330	3290 7250	**3075 6770**	3075 6770	-
460/85 R 34 (18.4 R 34)	147 A8/B	**W16L** W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	0.8 12	4720 10400	3080 6780	2520 5550	2190 4820	2050 4520	2050 4520	-
							1 15	5380 11850	3510 7730	2880 6340	2500 5510	2340 5150	2340 5150	-
							1.3 19	6260 13790	4080 8990	3350 7380	2910 6410	2720 5990	2720 5990	-
							1.6 23	7070 15570	4610 10150	3780 8330	3290 7250	**3075 6770**	3075 6770	-
460/85 R 34 (18.4 R 34)	157 A8/B	**W16L** W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	2 29	7480 16480	4880 10750	4000 8810	3480 7670	3250 7160	3250 7160	-
							2.3 33	8120 17890	5300 11670	4340 9560	3780 8330	3530 7780	3530 7780	-
							2.6 38	8720 19210	5690 12530	4660 10260	4060 8940	3790 8350	3790 8350	-
							3 44	9490 20900	6190 13630	5070 11170	4410 9710	**4125 9090**	4125 9090	-

These are tubeless tyres

	Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
									Maximum Load kg lbs					
R 36	320/85 R 36 (12.4 R 36)	128 A8/B	**W11** W10 W9	325 12.8	1458 57.4	677 26.7	4380 172.4	0.8 12	2760 6080	1800 3960	1480 3260	1280 2820	1200 2640	1200 2640
								1 15	3150 6940	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
								1.3 19	3660 8060	2390 5260	1960 4320	1700 3740	1590 3500	1590 3500
								1.6 23	4140 9120	2700 5950	2210 4870	1930 4250	**1800 3960**	1800 3960
	340/85 R 36 (13.6 R 36)	132 A8/B	**W12** W11	355 14	1492 58.7	694 27.3	4485 176.6	0.8 12	3060 6740	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
								1 15	3500 7710	2280 5020	1870 4120	1630 3590	1520 3350	1520 3350
								1.3 19	4070 8960	2660 5860	2180 4800	1890 4160	1770 3900	1770 3900
								1.6 23	4600 10130	3000 6610	2460 5420	2140 4710	**2000 4410**	2000 4410
R 38	320/85 R 38 (12.4 R 38)	143 A8/B	**W11** W10 W9	325 12.8	1510 59.4	703 27.7	4543 178.9	2.4 35	4950 10900	3230 7110	2640 5810	2300 5070	2150 4740	2150 4740
								2.8 41	5410 11920	3530 7780	2890 6370	2510 5530	2350 5180	2350 5180
								3.2 46	5840 12860	3810 8390	3120 6870	2720 5990	2540 5590	2540 5590
								3.6 52	6270 13810	4090 9010	3350 7380	2920 6430	**2725 6000**	2725 6000
	340/85 R 38 (13.6 R 38)	133 A8/B	**W12** W11	355 14	1543 60.7	719 28.3	4645 182.9	0.8 12	3150 6940	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
								1 15	3590 7910	2340 5150	1920 4230	1670 3680	1560 3440	1560 3440
								1.3 19	4190 9230	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010
								1.6 23	4740 10440	3090 6810	2530 5570	2200 4850	**2060 4540**	2060 4540
	340/85 R 38 (13.6 R 38)	148 A8/B	**W12** W11	355 14	1543 60.7	719 28.3	4645 182.9	3 44	6140 13520	4010 8830	3280 7220	2860 6300	2670 5880	2670 5880
								3.4 49	6600 14540	4310 9490	3530 7780	3070 6760	2870 6320	2870 6320
								3.8 55	7040 15510	4590 10110	3760 8280	3270 7200	3060 6740	3060 6740
								4 58	7250 15970	4730 10420	3870 8520	3370 7420	**3150 6940**	3150 6940
	340/85 R 38	151 A8/B	**W12** W11	355 14	1543 60.7	719 28.3	4645 182.9	3 44	4010 8830	3280 7220	2860 6300	2670 5880	2670 5880	-
								3.4 49	4310 9490	3530 7780	3070 6760	2870 6320	2870 6320	-
								3.8 55	4590 10110	3760 8280	3270 7200	3060 6740	3060 6740	-
								4 58	4730 10420	3870 8520	3370 7420	3150 6940	3150 6940	-
								4.5 65	5180 11410	4240 9340	3690 8130	**3450 7600**	3450 7600	-

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
								Maximum Load kg lbs					
420/85 R 38 (16.9 R 38)	144 A8/B	**W15L** W14L W13	450 17.7	1680 66.1	775 30.5	5026 197.9	0.8 12	4300 9470	2810 6190	2300 5070	2000 4410	1870 4120	1870 4120
							1 15	4900 10790	3200 7050	2620 5770	2280 5020	2130 4690	2130 4690
							1.3 19	5700 12560	3720 8190	3050 6720	2650 5840	2480 5460	2480 5460
							1.6 23	6440 14190	4200 9250	3440 7580	3000 6610	**2800 6170**	2800 6170
460/85 R 38 (18.4 R 38)	149 A8/B	**W16L** W15L W14L	480 18.9	1747 68.8	803 31.6	5213 205.2	0.8 12	4990 10990	3260 7180	2670 5880	2320 5110	2170 4780	2170 4780
							1 15	5680 12510	3710 8170	3040 6700	2640 5810	2470 5440	2470 5440
							1.3 19	6620 14580	4320 9520	3540 7800	3080 6780	2880 6340	2880 6340
							1.6 23	7480 16480	4880 10750	4000 8810	3480 7670	**3250 7160**	3250 7160
460/85 R 38 (18.4 R 38)	167 A8/B	**W16L** W15L W14L	480 18.9	1747 68.8	803 31.6	5213 205.2	2 29	7910 17420	5160 11370	4230 9320	3680 8110	3440 7580	3440 7580
							3 44	10030 22090	6540 14410	5360 11810	4670 10290	4360 9600	4360 9600
							4 58	11850 26100	7730 17030	6330 13940	5510 12140	5150 11340	5150 11340
							4.4 64	12540 27620	8180 18020	6700 14760	5830 12840	**5450 12000**	5450 12000
460/85 R 38	153 A8/B	**W16L** W15L W14L	480 18.9	1747 68.8	803 31.6	5213 205.2	0.8 12	4990 10990	3260 7180	2670 5880	2320 5110	2170 4780	2170 4780
							1 15	5680 12510	3710 8170	3040 6700	2640 5810	2470 5440	2470 5440
							1.3 19	6620 14580	4320 9520	3540 7800	3080 6780	2880 6340	2880 6340
							1.6 23	7480 16480	4880 10750	4000 8810	3480 7670	3250 7160	3250 7160
							2.4 35	8400 18500	5480 12070	4490 9890	3910 8610	**3650 8040**	3650 8040
520/85 R 38 (20.8 R 38)	155 A8/B	**DW16L** DW18L	530 20.9	1855 73	847 33.3	5513 217.1	0.8 12	5930 13060	3870 8520	3170 6980	2760 6080	2580 5680	2580 5680
							1 15	6760 14890	4410 9710	3620 7970	3150 6940	2940 6480	2940 6480
							1.3 19	7890 17380	5150 11340	4220 9300	3670 8080	3430 7560	3430 7560
							1.6 23	8910 19630	5810 12800	4770 10510	4150 9140	**3875 8540**	3875 8540
520/85 R 38 (20.8 R 38)	169 A8/B	**DW16** DW18L	530 20.9	1855 73	847 33.3	5513 217.1	2.4 35	10510 23150	6860 15110	5620 12380	4890 10770	4570 10070	4570 10070
							2.8 41	11500 25330	7500 16520	6150 13550	5350 11780	5000 11010	5000 11010
							3.2 46	12440 27400	8120 17890	6650 14650	5790 12750	5410 11920	5410 11920
							3.6 52	13340 29380	8700 19160	7130 15700	6210 13680	**5800 12780**	5800 12780

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31	65 40
								Maximum Load kg lbs						
R 42														
520/85 R 42 (20.8 R 42)	157 A8/B	**DW16L** DW18L	530 20.9	1951 76.8	889 35	5791 228	0.8 12	6330 13940	4130 9100	3380 7440	2940 6480	2750 6060	2750 6060	-
							1 15	7200 15860	4700 10350	3850 8480	3350 7380	3130 6890	3130 6890	-
							1.3 19	8400 18500	5480 12070	4490 9890	3910 8610	3650 8040	3650 8040	-
							1.6 23	9490 20900	6190 13630	5070 11170	4410 9710	**4125 9090**	4125 9090	-
520/85 R 42 (20.8 R 42)	169 A8/B	**DW16L** DW18L	530 20.9	1951 76.8	889 35	5791 228	1 15	6510 14340	4250 9360	3480 7670	3030 6670	2830 6230	2830 6230	-
							2 29	9780 21540	6380 14050	5230 11520	4550 10020	4250 9360	4250 9360	-
							2.8 41	11910 26230	7770 17110	6370 14030	5540 12200	5180 11410	5180 11410	-
							3.4 49	13340 29380	8700 19160	7130 15700	6210 13680	**5800 12780**	5800 12780	-
520/85 R 42	169 D / 172 A8/B	**DW16L** DW18L	530 20.9	1951 76.8	889 35	5791 228	1 15	6510 14340	4250 9360	3480 7670	3250 7160	3100 6230	2970 6540	2830 6230
							2 29	9780 21540	6380 14050	5230 11520	4890 10770	4650 9360	4460 9820	4250 9360
							2.8 41	11910 26230	7770 17110	6370 14030	5960 13130	5670 11410	5440 11980	5180 11410
							3.4 49	13340 29380	8700 19160	7130 15700	6670 14690	6350 13990	6090 13410	**5800 12780**
R 46														
520/85 R 46 (20.8 R 46)	158 A8/B	**DW16L** DW18L	530 20.9	2052 80.8	939 37.0	6109 240.5	0.8 12	6510 14340	4250 9360	3480 7670	3030 6670	2830 6230	2830 6230	-
							1 15	7430 16370	4850 10680	3970 8740	3460 7620	3230 7110	3230 7110	-
							1.3 19	8650 19050	5640 12420	4620 10180	4020 8850	3760 8280	3760 8280	-
							1.6 23	9780 21540	6380 14050	5230 11520	4550 10020	**4250 9360**	4250 9360	-
520/85 R 46 (20.8 R 46)	174 A8/B	**DW16L** DW18L	530 20.9	2052 80.8	939 37.0	6109 240.5	2.4 35	11430 25180	7460 16430	6110 13460	5320 11720	4970 10950	4970 10950	-
							2.8 41	12510 27560	8160 17970	6690 14740	5820 12820	5440 11980	5440 11980	-
							3.2 46	13520 29780	8820 19430	7230 15930	6290 13850	5880 12950	5880 12950	-
							4 58	15410 33940	10050 22140	8240 18150	7170 15790	**6700 14760**	6700 14760	-

These are tubeless tyres

FARMAX R 80

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
								Maximum Load kg lbs					
R 38													
380/80 R 38	142 A8/B	W11 **W12** W13	380 15	1573 61.9	731 28.8	4728 186.2	1 15	3660 8060	2390 5260	1960 4320	1700 3740	1590 3500	1590 3500
							1.6 23	4810 10590	3140 6920	2570 5660	2240 4930	2090 4600	2090 4600
							2 29	5470 12050	3570 7860	2930 6450	2550 5620	2380 5240	2380 5240
							2.4 35	6100 13440	3980 8770	3260 7180	2840 6260	**2650 5840**	2650 5840
380/80 R 38	152 A8/B	W11 **W12** W13	380 15	1573 61.9	757 29.8	4793 188.7	2.8 41	6620 14580	4320 9520	3540 7800	3080 6780	2880 6340	2880 6340
							3 44	6900 15200	4500 9910	3690 8130	3210 7070	3000 6610	3000 6610
							3.2 46	7180 15810	4680 10310	3840 8460	3340 7360	3120 6870	3120 6870
							3.5 52	7680 16920	5010 11040	4110 9050	3570 7860	3340 7360	3340 7360
							4.0 58	8170 18000	5330 11740	4370 9630	3800 8370	**3550 7820**	3550 7820
R 42													
480/80 R 42 (18.4 R 42)	151 A8/B	**DW16L**	485 19.1	1835 72.2	848 33.4	5472 216.3	0.8 12	5290 11650	3450 7600	2830 6230	2460 5420	2300 5070	2300 5070
							1 15	6030 13280	3930 8660	3220 7090	2800 6170	2620 5770	2620 5770
							1.3 19	7040 15510	4590 10110	3760 8280	3270 7200	3060 6740	3060 6740
							1.6 23	7940 17490	5180 11410	4240 9340	3690 8130	**3450 7600**	3450 7600
480/80 R 42	153 A8/B	**DW16L**	485 19.1	1835 72.2	848 33.4	5472 215.4	0.8 12	5290 11650	3450 7600	2830 6230	2460 5420	2300 5070	2300 5070
							1 15	6030 13280	3930 8660	3220 7090	2800 6170	2620 5770	2620 5770
							1.3 19	7040 15510	4590 10110	3760 8280	3270 7200	3060 6740	3060 6740
							1.6 23	7940 17490	5180 11410	4240 9340	3690 8130	3450 7600	3450 7600
							1.8 26	8400 18500	5480 12070	4490 9890	3910 8610	**3650 8040**	3650 8040
480/80 R 42	169 A8/B	**DW16L**	485 19.1	1835 72.2	848 33.4	5472 216.3	2.8 41	11020 24270	7190 15840	5890 12970	5130 11300	4790 10550	4790 10550
							3.2 46	11910 26230	7770 17110	6370 14030	5540 12200	5180 11410	5180 11410
							3.6 52	12770 28130	8330 18350	6830 15040	5940 13080	5550 12220	5550 12220
							4 56	13340 29380	8700 19160	7130 15700	6210 13680	**5800 12780**	5800 12780

These are tubeless tyres

FARMAX R 80

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
								Maximum Load kg lbs					
R 46													
480/80 R 46 (18.4 R 46)	158 A8/B	**DW16L**	485 19.1	1940 76.4	900 35.4	5800 228.3	1.3 19	6830 15040	4460 9820	3650 8040	3180 7000	2970 6540	2970 6540
							1.6 23	7710 16980	5030 11080	4120 9070	3580 7890	3350 7380	3350 7380
							2 29	8790 19360	5730 12620	4700 10350	4090 9010	3820 8410	3820 8410
							2.4 35	9780 21540	6380 14050	5230 11520	4550 10020	**4250 9360**	4250 9360
420/80 R 46	151D 154A8	**W13** **W12**	418 16.5	1840 72.4	853 33.6	5607 220.8	0.8 12	4160 9160	2720 5990	2080 4580	1980 4360	1900 4190	1810 3990
							1.2 17	5290 11650	3450 7600	2650 5840	2520 5550	2420 5330	2300 5070
							1.6 23	6260 13790	4080 8990	3130 6890	2980 6560	2860 6300	2720 5990
							1.8 26	6690 14740	4370 9630	3350 7380	3190 7030	3060 6740	2910 6410
							2 29	7130 15700	4650 10240	3570 7860	3390 7470	3260 7180	3100 6830
							2.4 35	7940 17490	5180 11410	3970 8740	3780 8330	**3620 7970**	3450 7600
420/80 R 46	159 D 162 A8	**W13** **W12**	418 16.5	1840 72.4	853 33.6	5607 220.8	2.4 35	7910 17420	5160 11370	3960 8720	3770 8300	3610 7950	3440 7580
							2.6 38	8300 18280	5420 11940	4150 9140	3950 8700	3790 8350	3610 7950
							2.8 41	8670 19100	5660 12470	4340 9560	4130 9100	3960 8720	3770 8300
							3 44	9040 19910	5900 13000	4520 9960	4300 9470	4130 9100	3930 8660
							3.2 46	9380 20660	6120 13480	4690 10330	4470 9850	4280 9430	4080 8990
							3.6 52	10060 22160	6560 14450	5030 11080	4790 10550	**4590 10110**	4375 9640
480/80 R 46	164 B / 164 A8	**W16**	485 19.1	1940 76.4	900 35.4	5800 228.3	1.3 19	4460 9820	4460 9820	3650 8040	3180 7000	2970 6540	2970 6540
							1.6 23	5030 11080	5030 11080	4120 9070	3580 7890	3350 7380	3350 7380
							2 29	5730 12620	5730 12620	4700 10350	4090 9010	3820 8410	3820 8410
							2.4 35	6380 14050	6380 14050	5230 11520	4550 10020	4250 9360	4250 9360
							2.8 29	6930 15260	6930 15260	5680 12510	4940 10880	4620 10180	4620 10180
							3.2 35	7500 16520	7500 16520	6150 13550	5350 11780	5000 11010	**5000 11010**

These are tubeless tyres

FARMAX R 70

	Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
				mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs					
R 20	260/70 R 20	113 A8/B	**W9** W8	260 10.2	872 34.3	401 15.8	2605 102.6	1.2 17	1770 3900	1160 2560	950 2090	820 1810	770 1700	770 1700
								1.6 23	2090 4600	1370 3020	1120 2470	970 2140	910 2000	910 2000
								2 29	2370 5220	1550 3410	1270 2800	1100 2420	1030 2270	1030 2270
								2.4 35	2650 5840	1730 3810	1410 3110	1230 2710	**1150 2530**	1150 2530
	280/70 R 20	116 A8/B	**W10** W9	290 11.4	900 35.4	413 16.3	2682 105.6	1.2 17	1910 4210	1250 2750	1020 2250	890 1960	830 1830	830 1830
								1.6 23	2280 5020	1490 3280	1220 2690	1060 2330	990 2180	990 2180
								2 29	2580 5680	1680 3700	1380 3040	1200 2640	1120 2470	1120 2470
								2.4 35	2880 6340	1880 4140	1540 3390	1340 2950	**1250 2750**	1250 2750
	300/70 R 20	110 A8/B	**W9** W10	295 11.6	952 37.5	434 17.1	2826 111.3	0.8 12	1630 3590	1070 2360	870 1920	760 1670	710 1560	710 1560
								1 15	1860 4100	1220 2690	1000 2200	870 1920	810 1780	810 1780
								1.3 19	2160 4760	1410 3110	1160 2560	1010 2220	940 2070	940 2070
								1.6	2440	1590	1300	1130	**1060**	1060
	300/70 R 20	120 A8/B	**W9** W10	295 11.6	952 37.5	434 17.1	2826 111.3	35	5370	3500	2860	2490	**2330**	2330
								1.3 19	2250 4960	1470 3240	1210 2670	1050 2310	980 2160	980 2160
								1.6 23	2530 5570	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420
								2 29	2900 6390	1890 4160	1550 3410	1350 2970	1260 2780	1260 2780
								2.4 35	3220 7090	2100 4630	1720 3790	1500 3300	**1400 3080**	1400 3080
	320/70 R 20	113 A8/B	W9 **W10** W11	320 12.6	982 38.7	446 17.6	2909 114.5	0.8 12	1770 3900	1160 2560	950 2090	820 1810	770 1700	770 1700
								1 15	2000 4410	1310 2890	1070 2360	930 2050	870 1920	870 1920
								1.3 19	2350 5180	1530 3370	1250 2750	1090 2400	1020 2250	1020 2250
								1.6 23	2650 5840	1730 3810	1410 3110	1230 2710	**1150 2530**	1150 2530
	320/70 R 20	123 A8/B	W9 **W10** W11	320 12.6	982 38.7	446 17.6	2909 114.5	1.3 19	2480 5460	1620 3570	1330 2930	1160 2560	1080 2380	1080 2380
								1.6 23	2810 6190	1830 4030	1500 3300	1310 2890	1220 2690	1220 2690
								2 29	3200 7050	2090 4600	1710 3770	1490 3280	1390 3060	1390 3060
								2.4 35	3570 7860	2330 5130	1910 4210	1660 3660	**1550 3410**	1550 3410

These are tubeless tyres

	Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
				mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs					
	360/70 R 20	120 A8/B	W12 **W11** W10	360 14.2	1042 41	470 18.5	3075 121	0.8 12	2140 4710	1400 3080	1140 2510	1000 2200	930 2050	930 2050
								1 15	2440 5370	1590 3500	1300 2860	1130 2490	1060 2330	1060 2330
								1.3 19	2850 6280	1860 4100	1530 3370	1330 2930	1240 2730	1240 2730
								1.6 23	3220 7090	2100 4630	1720 3790	1500 3300	**1400 3080**	1400 3080
	360/70 R 20	129 A8/B	W12 **W11** W10	360 14.2	1042 41	470 18.5	3075 121	1.3 19	2970 6540	1940 4270	1590 3500	1380 3040	1290 2840	1290 2840
								1.6 23	3360 7400	2190 4820	1800 3960	1560 3440	1460 3220	1460 3220
								2 29	3820 8410	2490 5480	2040 4490	1780 3920	1660 3660	1660 3660
								2.4 35	4260 9380	2780 6120	2280 5020	1980 4360	**1850 4070**	1850 4070
	380/70 R 20	122 A8/B	W13 **W12** W11	380 15	1082 42.6	486 19.2	3185 125.4	0.8 12	2300 5070	1500 3300	1230 2710	1070 2360	1000 2200	1000 2200
								1 15	2620 5770	1710 3770	1400 3080	1220 2690	1140 2510	1140 2510
								1.3 19	3060 6740	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
								1.6 23	3450 7600	2250 4960	1850 4070	1610 3550	**1500 3300**	1500 3300
	380/70 R 20	132 A8/B	W13 **W12** W11	380 15	1082 42.6	486 19.2	3185 125.4	1.3 19	3220 7090	2100 4630	1720 3790	1500 3300	1400 3080	1400 3080
								1.6 23	3630 8000	2370 5220	1940 4270	1690 3720	1580 3480	1580 3480
								2 29	4140 9120	2700 5950	2210 4870	1930 4250	1800 3960	1800 3960
								2.4 35	4600 10130	3000 6610	2460 5420	2140 4710	**2000 4410**	2000 4410
R 24	320/70 R 24	116 A8/B	W9 **W10** W11	320 12.6	1095 43.1	501 19.7	3260 128.4	0.8 12	1910 4210	1250 2750	1020 2250	890 1960	830 1830	830 1830
								1 15	2190 4820	1430 3150	1170 2580	1020 2250	950 2090	950 2090
								1.3 19	2550 5620	1670 3680	1370 3020	1190 2620	1110 2440	1110 2440
								1.6 23	2880 6340	1880 4140	1540 3390	1340 2950	**1250 2750**	1250 2750
	360/70 R 24	122 A8/B	W12 **W11** W10	360 14.2	1152 45.4	524 20.6	3418 134.6	0.8 12	2300 5070	1500 3300	1230 2710	1070 2360	1000 2200	1000 2200
								1 15	2620 5770	1710 3770	1400 3080	1220 2690	1140 2510	1140 2510
								1.3 19	3060 6740	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
								1.6 23	3450 7600	2250 4960	1850 4070	1610 3550	**1500 3300**	1500 3300

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31	65 40
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs						
380/70 R 24	125 D/ 128 A8/B	W13 **W12** W11	380 15	1190 46.9	540 21.3	3523 138.7	0.8 12	2530 5570	1650 3630	1350 2970	1270 2800	1200 2420	1160 2560	1100 2420
							1 15	2880 6340	1880 4140	1540 3390	1440 3170	1370 2750	1310 2890	1250 2750
							1.3 19	3360 7400	2190 4820	1800 3960	1680 3700	1600 3220	1530 3370	1460 3220
							1.6 23	3800 8370	2480 5460	2030 4470	1900 4190	1810 3990	1730 3810	**1650 3630**
380/70 R 24	125 A8/B	W13 **W12** W11	380 15	1190 46.9	540 21.3	3523 138.7	0.8 12	2530 5570	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420	-
							1 15	2880 6340	1880 4140	1540 3390	1340 2950	1250 2750	1250 2750	-
							1.3 19	3360 7400	2190 4820	1800 3960	1560 3440	1460 3220	1460 3220	-
							1.6 23	3800 8370	2480 5460	2030 4470	1770 3900	**1650 3630**	1650 3630	-
420/70 R 24	130 D / 133 A8	W12 **W13** W14L	430 16.9	1248 49.1	563 22.2	3683 145	0.8 12	2900 6390	1890 4160	1550 3410	1450 3190	1380 2780	1320 2910	1260 2780
							1 15	3310 7290	2160 4760	1770 3900	1660 3660	1580 3170	1510 3330	1440 3170
							1.3 19	3860 8500	2520 5550	2070 4560	1930 4250	1840 3700	1760 3880	1680 3700
							1.6 23	4370 9630	2850 6280	2340 5150	2190 4820	2080 4580	2000 4410	**1900 4190**
420/70 R 24	130 A8/B	W12 **W13** W14L	430 16.9	1248 49.1	563 22.2	3683 145	0.8 12	2920 6430	1910 4210	1560 3440	1360 3000	1270 2800	1270 2800	-
							1 15	3310 7290	2160 4760	1770 3900	1540 3390	1440 3170	1440 3170	-
							1.3 19	3860 8500	2520 5550	2070 4560	1800 3960	1680 3700	1680 3700	-
							1.6 23	4370 9630	2850 6280	2340 5150	2030 4470	**1900 4190**	1900 4190	-
480/70 R 24	138 A8/B	W14L **W15L** W16L	490 19.3	1316 51.8	591 23.3	3871 152.4	0.8 12	3610 7950	2360 5200	1930 4250	1680 3700	1570 3460	1570 3460	-
							1 15	4120 9070	2690 5930	2200 4850	1920 4230	1790 3940	1790 3940	-
							1.3 19	4810 10590	3140 6920	2570 5660	2240 4930	2090 4600	2090 4600	-
							1.6 23	5430 11960	3540 7800	2900 6390	2530 5570	**2360 5200**	2360 5200	-
R 28														
320/70 R 28	119 A8/B	W9 **W10** W11	320 12.6	1190 46.9	550 21.6	3562 140.2	0.8 12	2090 4600	1370 3020	1120 2470	970 2140	910 2000	910 2000	-
							1 15	2370 5220	1550 3410	1270 2800	1100 2420	1030 2270	1030 2270	-
							1.3 19	2760 6080	1800 3960	1480 3260	1280 2820	1200 2640	1200 2640	-
							1.6 23	3130 6890	2040 4490	1670 3680	1460 3220	**1360 3000**	1360 3000	-

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31	65 40
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs						
360/70 R 28	125 A8/B	W12 **W11** W10	360 14.2	1251 49.3	574 22.6	3730 146.9	0.8 12	2530 5570	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420	-
							1 15	2880 6340	1880 4140	1540 3390	1340 2950	1250 2750	1250 2750	-
							1.3 19	3360 7400	2190 4820	1800 3960	1560 3440	1460 3220	1460 3220	-
							1.6 23	3800 8370	2480 5460	2030 4470	1770 3900	**1650 3630**	1650 3630	-
380/70 R 28	127 A8/B	W13 **W12** W11	380 15	1293 50.9	591 23.3	3846 151.4	0.8 12	2690 5930	1760 3880	1440 3170	1250 2750	1170 2580	1170 2580	-
							1 15	3060 6740	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930	-
							1.3 19	3570 7860	2330 5130	1910 4210	1660 3660	1550 3410	1550 3410	-
							1.6 23	4030 8880	2630 5790	2150 4740	1870 4120	**1750 3850**	1750 3850	-
420/70 R 28	133 A8/B	W12 **W13** W14L	430 16.9	1349 53.1	614 24.2	3985 156.9	0.8 12	3150 6940	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020	-
							1 15	3590 7910	2340 5150	1920 4230	1670 3680	1560 3440	1560 3440	-
							1.3 19	4190 9230	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010	-
							1.6 23	4740 10440	3090 6810	2530 5570	2200 4850	**2060 4540**	2060 4540	-
420/70 R 28	133 D / 136 A8/B	W12 **W13** W14L	430 16.9	1349 53.1	614 24.2	3985 156.9	0.8 12	3150 6940	2060 4540	1690 3720	1580 3480	1500 3020	1440 3170	1370 3020
							1 15	3590 7910	2340 5150	1920 4230	1790 3940	1710 3440	1640 3610	1560 3440
							1.3 19	4190 9230	2730 6010	2240 4930	2090 4600	1990 4010	1910 4210	1820 4010
							1.6 23	4740 10440	3090 6810	2530 5570	2370 5220	2260 4980	2160 4760	**2060 4540**
480/70 R 28	140 A8/B	W14L **W15L** W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	0.8 12	3840 8460	2510 5530	2050 4520	1790 3940	1670 3680	1670 3680	-
							1 15	4370 9630	2850 6280	2850 6280	2030 4470	1900 4190	1900 4190	-
							1.3 19	5080 11190	3320 7310	3320 7310	2360 5200	2210 4870	2210 4870	-
							1.6 23	5750 12670	3750 8260	3750 8260	2680 5900	**2500 5510**	2500 5510	-
480/70 R 28	151 A8/B	W14L **W15L** W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	2 29	6030 13280	3930 8660	3220 7090	2800 6170	2620 5770	2620 5770	-
							2.4 35	6690 14740	4370 9630	3580 7890	3110 6850	2910 6410	2910 6410	-
							2.8 41	7340 16170	4790 10550	3920 8630	3410 7510	3190 7030	3190 7030	-
							3.2 46	7940 17490	5180 11410	4240 9340	3690 8130	**3450 7600**	3450 7600	-

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs					
600/70 R 28	161 A8/B	DW18L **DW20B**	611 24.1	1551 61.1	692 27.2	4532 178.4	1.8 26	8210 18080	5360 11810	4390 9670	3820 8410	3570 7860	3570 7860
							2 29	8740 19250	5700 12560	4670 10290	4070 8960	3800 8370	3800 8370
							2.4 35	9730 21430	3650 13990	5200 11450	4530 9980	4230 9320	4230 9320
							2.8 41	10640 23440	6940 15290	5130 11300	4950 10900	**4628 10190**	4625 10190
R 30 420/70 R 30	134 A8/B	W12 **W13** W14L	430 16.9	1398 55	639 25.1	4156 163.6	0.8 12	3240 7140	2120 4670	1730 3810	1510 3330	1410 3110	1410 3110
							1 15	3700 8150	2420 5330	1980 4360	1720 3790	1610 3550	1610 3550
							1.3 19	4320 9520	2820 6210	2310 5090	2010 4430	1880 4140	1880 4140
							1.6 23	4880 10750	3180 7000	2610 5750	2270 5000	**2120 4670**	2120 4670
480/70 R 30	141 A8/B	W14L **W15L** W16L	490 19.3	1478 58.2	671 26.4	4377 172.3	0.8 12	3960 8720	2580 5680	2120 4670	1840 4050	1720 3790	1720 3790
							1 15	4510 9930	2940 6480	2410 5310	2100 4630	1960 4320	1960 4320
							1.3 19	5240 11540	3420 7530	2800 6170	2440 5370	2280 5020	2280 5020
							1.6 23	5920 13040	3860 8500	3170 6980	2760 6080	**2575 5670**	2575 5670
480/70 R 30	147 D 150 A8	W14L **W15L** W16L	490 19.3	1478 58.2	671 26.4	4377 172.3	1.5 22	5380 11850	3510 7730	2880 6340	2500 5510	2560 5640	2460 5420
							1.8 26	5980 13170	4280 9430	3200 7050	2780 6120	2850 6280	2730 6010
							2 29	6350 13990	4530 9980	3390 7470	2950 6500	3020 6650	2900 6390
							2.4 35	7070 15570	4610 10150	3780 8330	3540 7800	**3370 7420**	3230 7110
520/70 R 30	145 A8/B	W15L **W16L** W18L	516 20.9	1536 60.5	743 27.3	4946 178.6	0.8 12	4440 9780	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250
							1 15	5060 11150	3300 7270	2710 5970	2350 5180	2200 4850	2200 4850
							1.3 19	5910 13020	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
							1.6 23	6670 14690	4350 9580	3570 7860	3100 6830	**2900 6390**	2900 6390
600/70 R 30	152 A8/B	DW18L **DW20B**	611 24.06	1602 63.07	717 28.25	4681 184.3	0.8 12	5430 11960	3540 7800	2900 6390	2530 5570	2360 5200	2360 5200
							1 15	6190 13630	4040 8900	3310 7290	2880 6340	2690 5930	2690 5930
							1.3 19	7220 15900	4710 10370	3860 8500	3360 7400	3140 6920	3140 6920
							1.6 23	8170 18000	5330 11740	3940 8680	3800 8370	**3550 7820**	3550 7820

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs					
R 34 480/70 R 34	143 A8/B	W14L **W15L** W16L	490 19.3	1580 62.2	722 28.4	4698 185	0.8 12	4190 9230	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010
							1 15	4760 10480	3110 6850	2550 5620	2210 4870	2070 4560	2070 4560
							1.3 19	5540 12200	3620 7970	2960 6520	2580 5680	2410 5310	2410 5310
							1.6 23	6270 13810	4090 9010	3350 7380	2920 6430	**2725 6000**	2725 6000
480/70 R 34	149 A8/B	W14L **W15L** W16L	490 10.3	1580 62.2	722 28.4	4698 185	1.8 26	6330 13940	4130 9100	3380 7440	2940 6480	2750 6060	2750 6060
							2 29	6720 14800	4380 9650	3590 7910	3120 6870	2920 6430	2920 6430
							2.2 32	7110 15660	4640 10220	3800 8370	3310 7290	3090 6810	3090 6810
							2.4 35	7480 16480	4880 10750	3610 7950	3480 7670	**3250 7160**	3250 7160
520/70 R 34	148 A8/B	W15L **W16L** W18L	530 20.9	1640 64.6	746 29.4	4864 191.5	0.8 12	4830 10640	3150 6940	2580 5680	2250 4960	2100 4630	2100 4630
							1 15	5500 12110	3590 7910	2940 6480	2560 5640	2390 5260	2390 5260
							1.3 19	6420 14140	4190 9230	3430 7560	2990 6590	2790 6150	2790 6150
							1.6 23	7250 15970	4730 10420	3870 8520	3370 7420	**3150 6940**	3150 6940
480/70 R 38	145 A8/B	W14L **W15L** W16L	500 19.7	1680 66.1	773 30.4	5013 197.4	0.8 12	4440 9780	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250
							1 15	5060 11150	3300 7270	2710 5970	2350 5180	2200 4850	2200 4850
							1.3 19	5910 13020	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
							1.6 23	6670 14690	4350 9580	3220 7090	3100 6830	**2900 6390**	2900 6390
480/70 R 34	155 A8/B	W14L **W15L** W16L	490 10.3	1580 62.2	722 28.4	4698 185	0.8 12	4160 9160	2720 5990	2230 4910	1940 4270	1810 3990	1810 3990
							1.3 19	5540 12200	3620 7970	2960 6520	2580 5680	2410 5310	2410 5310
							1.6 23	6270 13810	4090 9010	3350 7380	2920 6430	2725 6000	2730 6010
							2.4 35	7480 16480	4880 10750	3610 7950	3480 7670	3250 7160	3250 7160
							2.6 38	8050 17730	5250 11560	4310 9490	3750 8260	3500 7710	3500 7710
							2.8 41	8440 18500	5480 12070	4490 9890	3910 8610	3650 8040	3650 8040
							3 44	8740 19250	5700 12560	4670 10290	4070 8960	3800 8370	3800 8370
							3.1 45	8910 19630	5810 12800	4300 9470	4150 9140	**3875 8540**	3875 8540

These are tubeless tyres

R 38

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31	70
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs						
520/70 R 34	168 A8/B	W15L **W16L** W18L	530 20.9	1640 64.6	746 29.4	4864 191.5	3.2 46	10860 23920	7080 15590	5810 12800	5050 11120	4720 10400	4720 10400	
							3.8 55	12010 26450	7830 17250	6420 14140	5590 12310	5220 11500	5220 11500	
							4.3 62	12880 28370	8400 18500	6890 15180	5990 13190	**5600 12330**	5600 12330	
520/70 R 38	150 A8/B	W15L **W16L** W18L	530 20.9	1749 68.9	800 31.5	5204 204.9	0.8 12	5150 11340	3360 7400	2760 6080	2400 5290	2240 4930	2240 4930	
							1 15	5870 12930	3830 8440	3140 6920	2730 6010	2550 5620	2550 5620	
							1.3 19	6830 15040	4460 9820	3650 8040	3180 7000	2970 6540	2970 6540	
							1.6 23	7710 16980	5030 11080	4120 9070	3580 7890	**3350 7380**	3350 7380	
520/70 R 38	150 D / 153 A8	W15L **W16L** W18L	530 20.9	1749 68.9	800 31.5	5204 204.9	0.8 12	3840 8460	2510 5530	2050 4520	1920 4230	1830 3680	1750 3850	1670 3680
							1 15	4370 9630	2850 6280	2340 5150	2190 4820	2080 4190	2000 4410	1900 4190
							1.3 19	5080 11190	3320 7310	2720 5990	2540 5590	2420 4870	2320 5110	2210 4870
							1.6 23	5750 12670	3750 8260	3080 6780	2880 6340	2740 6040	2630 5790	**2500 5510**
580/70 R 38	155 A8/B	**W18L**	577 22.72	1827 71.93	832 32.7	5420 213.4	0.8 12	5930 13060	3870 8520	3170 6980	2760 6080	2580 5680	2580 5680	
							1 15	6760 14890	4410 9710	3620 7970	3150 6940	2940 6480	2940 6480	
							1.3 19	7890 17380	5150 11340	4220 9300	3670 8080	3430 7560	3430 7560	
							1.6 23	8910 19630	5810 12800	4770 10510	4150 9140	**3875 8540**	3875 8540	
580/70 R 38	170 A8/B	**W18L**	577 22.72	1827 71.93	832 32.7	5420 213.4	2.8 41	11200 24670	7310 16100	5990 13190	5210 11480	4870 10730	4870 10730	
							3.4 49	12560 27670	8190 18040	6060 13350	5840 12860	5460 12030	5460 12030	
							4 58	13800 30400	9000 19820	6660 14670	6420 14140	**6000 13220**	6000 13220	
580/70 R 38	180 A8/B	**W18L**	577 22.72	1827 71.93	832 32.7	5420 213.4	4.6 67	16770 36940	10940 24100	8970 19760	7800 17180	7290 16060	7290 16060	
							5 73	17600 38770	11480 25290	8490 18700	8190 18040	7650 16850	7650 16850	
							5.4 78	18400 40530	12000 26430	8880 19560	8560 18850	**8000 17620**	8000 17620	
710/70 R 38	172 A8/B	**DW23B** DW25B	716 28.15	1959 77.13	881 34.67	5785 227.8	1.8 26	11940 26300	7790 17160	6380 14050	5550 12220	5190 11430	5190 11430	
							2 29	12700 27970	8280 18240	6790 14960	5910 13020	5520 12160	5520 12160	
							2.2 32	13430 29580	8760 19300	7180 15810	6250 13770	5840 12860	5840 12860	
							2.4 35	14150 31170	9230 20330	6830 15040	6580 14490	**6150 13550**	6150 13550	

R 42

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Static	10 6	20 12	30 19	40 25	50 31	70
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs						
710/70 R 38	178 A8/B	**DW23B** DW25B	715 28.15	1959 77.13	881 34.67	5785 227.8	2.6 38	15270 33630	9960 21940	8470 18000	7100 15640	6640 14630	6640 14630	
							2.8 41	15940 35110	10400 22910	8520 18770	7420 16340	6930 15260	6930 15260	
							3 44	16610 36590	10830 23850	8880 19560	7730 17030	7220 15900	7220 15900	
							3.2 46	17250 38000	11250 24780	8330 18350	8030 17690	**7500 16520**	7500 16520	
580/70 R42	158 A8/B	**W 18 L**	580 22.8	1879 74.0	859 33.8	5578 219.6	0.8 12	6510 14340	4250 9360	3480 7670	3030 6670	2830 6230		
							1.2 17	8260 18190	5390 11870	4420 9740	3840 8460	3590 7910		
							1.3 19	8650 19050	5640 12420	4620 10180	4020 8850	3760 8280		
							1.6 23	9780 21540	6380 14050	4720 10400	**4550 10020**	4250 9360		
580/70 R42	161 A8	**W 18 L**	597 22.7	1895 74.0	859 33.8	5578 219.6	0.8 12	6510 14340	4250 9360	3350 7380	3100 6830	2970 6540	2830 6230	2580 5680
							1.2 17	8260 18190	5390 11870	4250 9360	3930 8660	3770 8300	3590 7910	3270 7200
							1.4 20	9040 19910	5900 13000	4660 10260	4300 9470	4130 9100	3930 8660	3580 7890
							1.6 23	9780 21540	6380 14050	5040 11100	**4650 10240**	4460 9820	4250 9360	3870 8520
620/70 R42	166 A8/B	**DW20B** W18L	625 24.6	1935 76.2	881 34.7	5745 226.2	1.8 26	10300 22690	6720 14800	5510 12140	4790 10550	4480 9870	4480 9870	
							2 29	10970 24160	7160 15770	5870 12930	5100 11230	4770 10510	4770 10510	
							2.2 32	11590 25530	7560 16650	6200 13660	5390 11870	5040 11100	5040 11100	
							2.4 35	12190 26850	7950 17510	5880 12950	**5670 12490**	5300 11670	5300 11670	
620/70 R42	173 A8/B	**DW20B** W18L	625 24.6	1935 76.2	881 34.7	5745 226.2	1.8 26	10300 22690	6720 14800	5510 12140	4790 10550	4480 9870	4480 9870	
							2 29	10970 24160	7160 15770	5870 12930	5100 11230	4770 10510	4770 10510	
							2.2 32	11590 25530	7560 16650	6200 13660	5390 11870	5040 11100	5040 11100	
							3.4 49	14950 32930	9750 21480	7220 15900	**6960 15330**	6500 14320	6500 14320	
710/70 R 42	173 A8/B	**DW23L** DW25B	715 28.15	2061 81.14	932 36.68	6119 240.9	1.8 26	12630 27820	8240 18150	5870 12930	5870 12930	5490 12090	5490 12090	5490 12090
							2 29	13430 29580	8760 19300	6250 13770	6250 13770	5840 12860	5840 12860	5840 12860
							2.2 32	14210 31300	9270 20420	6610 14560	6610 14560	6180 13610	6180 13610	6180 13610
							2.4 35	14950 32930	9750 21480	6960 15330	6960 15330	**6500 14320**	6500 14320	6500 14320

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph: Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs					
FARMAX R 90													
R 30													
420/90 R 30	142 A8/B	**DW13** W14L	426 16.77	1518 59.76	684 26.9	4483 176.5	0.8 12	4070 8960	2660 5860	2180 4800	1890 4160	1770 3900	1770 3900
							1.2 17	5150 11340	3360 7400	2760 6080	2400 5290	2240 4930	2240 4930
							1.4 20	5640 12420	3680 8110	3010 6630	2620 5770	2450 5400	2450 5400
							1.6 23	6100 13440	3980 8770	3260 7180	2840 6260	**2650 5840**	2650 5840
420/90 R 30	147 A8/B	**DW13** W14L	436 16.8	1518 59.8	684 26.9	4483 176.5	1.8 26	5980 13170	3900 8590	3200 7050	2780 6120	2600 5730	2600 5730
							2 29	6350 13990	4140 9120	3390 7470	2950 6500	2760 6080	2760 6080
							2.2 32	6720 14800	4380 9650	3590 7910	3120 6870	2920 6430	2920 6430
							2.4 35	7070 15570	4610 10150	3780 8330	3290 7250	**3075 6770**	3075 6770

65 SERIES AGRI RADIAL

WITH THE POWER OF CTR*

FEATURE
- Tilted lug tip

BENEFIT
- Lesser vibration and noise

FEATURE
- Mud breaker

BENEFIT
- Better self cleaning

FEATURE
- Higher angle and lug overlap at centre

BENEFIT
- Better roadability

FEATURES
- Wider tread
- Larger inner volume

BENEFIT
- Reduced soil compaction

FEATURE
- R1-W tread depth

BENEFIT
- Longer tyre life

FEATURE
- Lower angle at shoulder

BENEFIT
- Superior traction

FEATURE
- Rounded shoulder

BENEFIT
- Lesser damage to soil and crop

*CTR-Low Compaction, High Traction, High Roadability

FARMAX R 65

	Size	LI/SS	Rim	Unloaded Dimensions SW mm in	Unloaded Dimensions OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph — Field Operations	Non-Cyclic Operations 25 16	40 25	50 31	65 40	Infl. Press. bar psi	Speed kmph mph — Cyclic Operations 10 6	15 9
									Maximum Load				kg lbs		Recom. Load	kg lbs
R 20	340/65R20	124 D	**W11L** W10L W12L	343 13.5	950 37.4	432 17	2850 112	1.8 26	1550 3410	1600 3520	1480 3260	1420 3130	1350 2970	2.25 33	2300 5070	2090 4600
								2 29	1660 3660	1710 3770	1580 3480	1510 3330	1440 3172	2.5 36	2450 5400	2230 4910
								2.2 32	1750 3850	1800 3960	1660 3660	1600 3520	1520 3350	2.75 40	2580 5680	2360 5200
								2.4 35	1840 4050	1900 4190	1750 3850	1680 3700	**1600 3520**	3 44	2720 5990	2480 5460
	420/65R20	135 D	**W13L** W11L W12L	418 16.5	1054 41.5	473 19	3113 123	1.8 26	2120 4670	2180 4800	2010 4430	1930 4250	1840 4050	2.25 33	3130 6890	2850 6280
								2 29	2250 4960	2320 5110	2150 4740	2060 4540	1960 4320	2.5 36	3330 7330	3040 6700
								2.2 32	2380 5240	2450 5400	2270 5000	2170 4780	2070 4560	2.75 40	3520 7750	3210 7070
								2.4 35	2510 5530	2580 5680	2390 5260	2290 5040	**2180 4800**	3 44	3710 8170	3380 7440
	440/65R20	138 D	**W14L** W13L W15L	441 17.4	1080 42.5	483 19	3240 128	1.8 26	2290 5040	2360 5200	2080 4800	2090 4600	1990 4380	2.25 33	3380 7440	3080 6780
								2 29	2440 5370	2510 5530	2320 5110	2230 4910	2120 4670	2.5 36	3600 7930	3290 7250
								2.2 32	2580 5680	2650 5840	2450 5400	2350 5180	2240 4930	2.75 40	3810 8390	3470 7640
								2.4 35	2710 5970	2800 6170	2580 5680	2480 5460	**2360 5200**	3 44	4010 8830	3660 8060
R 24	420/65R24	138 D	**W13L** W11L W12L	418 16.5	1156 45.5	524 21	3414 134	2.4 35	2300 5070	2370 5220	2190 4820	2100 4630	2000 4410	3 44	3400 7490	3100 6830
								2.8 41	2520 5550	2600 5730	2400 5290	2300 5070	2190 4820	3.5 51	3720 8190	3390 7470
								3 44	2620 5770	2700 5950	2500 5510	2390 5260	2280 5020	3.75 54	3880 8550	3530 7780
								3.2 46	2710 5970	2800 6170	2580 5680	2480 5460	**2360 5200**	3.9875 58	4010 8830	3660 8060
	440/65 R 24	135 D	W13L **W14L** W15L	441 17.4	1182 46.5	540 21	3501 137.8	0.8 12	1370 3020	1410 3110	1300 2860	1250 2750	1190 2620	1 15	2020 4450	1840 4050
								1 15	1560 3440	1610 3550	1490 3280	1430 3150	1360 3000	1.25 18	2310 5090	2110 4650
								1.3 19	1830 4030	1880 4140	1740 3830	1670 3680	1590 3500	1.25 24	2700 5950	2460 5420
								1.6 23	2070 4560	2130 4690	1970 4340	1890 4160	**1800 3960**	2 29	3060 6740	2790 6150

These are tubeless tyres

	Size	LI/SS	Rim	Unloaded Dimensions SW mm in	Unloaded Dimensions OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph — Field Operations	Non-Cyclic Operations 25 16	40 25	50 31	65 40	Infl. Press. bar psi	Speed kmph mph — Cyclic Operations 10 6	15 9
									Maximum Load				kg lbs		Recom. Load	kg lbs
	440/65 R 24	135 D	W13L **W14L** W15L	441 17.4	1182 46.5	540 21	3501 137.8	1.8 26	2120 4670	2180 4800	2010 4430	1930 4250	1840 4050	2.25 33	3130 6890	2850 6280
								2 29	2250 4960	2320 5110	2150 4740	2060 4540	1960 4320	2.5 36	3330 7330	3040 6700
								2.2 32	2380 5240	2450 5400	2270 5000	2170 4680	2070 4560	2.75 40	3520 7750	3210 7070
								2.4 35	2510 5530	2580 5680	2390 5260	2290 5040	**2180 4800**	3 44	3710 8170	3380 7440
	480/65 R 24	133 D	**W15L** W14L	480 18.9	1234 48.6	558 22	3644 143.5	0.8 12	1580 3480	1620 3570	1500 3300	1440 3170	1370 3020	1 15	2330 5130	2120 4670
								1 15	1790 3940	1850 4070	1710 3770	1640 3610	1560 3440	1.25 18	2650 5840	2420 5330
								1.3 19	2090 4600	2160 4760	1990 4380	1910 4210	1820 4010	1.63 24	3090 6810	2820 6210
								1.6 23	2370 5220	2440 5370	2260 4980	2160 4760	**2060 4540**	2 29	3500 7710	3190 7030
								1.8 26	2440 5370	2510 5530	2320 5110	2230 4910	2120 4670	2.25 33	3600 7930	3290 7250
	480/65 R 24	140 D	**W15L** W14L	480 18.9	1234 48.6	558 22	3644 143.5	2 29	2590 5700	2670 5880	2460 5420	2360 5200	2250 4960	2.5 36	3830 8440	3490 7690
								2.2 32	2740 6040	2820 6210	2610 5750	2500 5510	2380 5240	2.75 40	4050 8920	3690 8130
								2.4 35	2880 6340	2960 5620	2740 6040	2630 5790	**2500 5510**	3 44	4250 9360	3880 8550
	540/65 R 24	140 D	**W16L** W18L	550 21.7	1235 51.7	590 23	3860 152	0.8 12	1920 4230	1980 4360	1830 4030	1750 3850	1670 3680	1 15	2840 6260	2590 5700
								1.0 15	2190 4820	2250 4960	2080 4580	2000 4410	1900 4190	1.25 18	3230 7110	2950 6500
								1.3 19	2540 5590	2620 5770	2420 5330	2320 5110	2210 4870	1.625 24	3760 8280	3430 7560
								1.6 23	2880 6340	2960 6520	2740 6040	2630 5790	**2500 5510**	2 29	4250 9360	3880 8550
	540/65 R 24	146 D	**W16L** W18L	550 21.7	1312 51.7	590 23	3860 152	0.8 12	1820 4010	1870 4120	1730 3810	1660 3660	1580 3480	1 15	2690 5930	2450 5400
								1 15	2070 4560	2130 4690	1970 4340	1890 4160	1800 3960	1.25 18	3060 6740	2790 6150
								1.3 19	2420 5330	2490 5480	2300 5070	2210 4870	2100 4630	1.625 24	3570 7860	3260 7180
								2.4 35	3450 7600	3560 7840	3290 7250	3150 6940	**3000 6610**	3 44	5100 11230	4650 10240

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimensions SW mm in	Unloaded Dimensions OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph: Field Operations	Non-Cyclic Operations 25	40	50	65	Infl. Press. bar psi	Speed kmph mph: Cyclic Operations 10	15
								16	25	31	40		6	9
							Maximum Load				kg lbs		Recom. Load	kg lbs
R 28															
440/65 R 28	138 D	W13 **W14L** W15L	441 17.4	1283 50.5	587 23.1	3819 150.3	1.8 26	2290 5040	2360 5200	2180 4800	2090 4600	1990 4380	2.3 33	3380 7740	3080 6780
							2.0 29	2440 5370	2510 5530	2320 5110	2230 4910	2120 4670	2.5 36	3600 7930	3290 7250
							2.2 32	2580 5680	2650 5840	2450 5400	2350 5180	2240 4930	2.8 40	3810 8390	3470 7640
							2.4 **35**	2710 5970	2800 6170	2580 5680	2480 5460	**2360** **5200**	3 44	4010 8830	3660 8060
480/65 R 28	136 D	**W15L** W14L	480 18.9	1335 52.6	608 23.9	3962 156	0.8 12	1710 3770	1770 3900	1630 3590	1560 3440	1490 3280	1 15	2530 5570	2310 5090
							1 15	1960 4320	2010 4430	1860 4100	1790 3940	1700 3740	1.3 18	2890 6370	2640 5810
							1.3 19	2280 5020	2350 5180	2170 4780	2080 4580	1980 4360	1.6 24	3370 7420	3070 6760
							1.6 **23**	2580 5680	2650 5840	2450 5400	2350 5180	**2240** **4930**	2 29	3810 8390	3470 7640
480/65 R 28	142 D	**W15L** W14L	480 18.9	1335 52.6	608 23.9	3962 156	1.8 26	2580 5680	2650 5840	2450 5400	2350 5180	2240 4930	2.25 33	3810 8390	3470 7640
							2.0 29	2740 6040	2820 6210	2610 5750	2500 5510	2380 5240	2.50 36	4050 8920	3690 8130
							2.2 32	2900 6390	2990 6590	2760 6080	2650 5840	2520 5550	2.75 40	4280 9430	3910 8610
							2.4 **35**	3050 6720	3140 6920	2900 6390	2780 6120	**2650** **5840**	3 44	4510 9930	4110 9050
540/65 R 28	142 D	**W16L** W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	0.8 12	2040 4490	2100 5630	1940 4270	1860 4100	1770 3900			
							1 15	2320 5110	2390 5260	2210 4870	2120 4670	2020 4450	1.25 18	3430 7560	3130 6890
							1.3 19	2700 5950	2780 6120	2570 5660	2470 5440	2350 5180	1.625 24	4000 8810	3640 8020
							1.6 **23**	3050 6720	3140 6920	2900 6390	2780 6120	**2650** **5840**	2 29	4510 9930	4110 9050
540/65 R 28	149 D	**W16L** W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	1.4 20	2730 6010	2810 6190	2600 5730	2490 5480	2370 5220	1.75 25	4030 8880	3670 8080
							1.6 23	2940 6480	3030 6670	2800 6170	2690 5930	2560 5640	2 29	4350 9580	3970 8740
							2.0 29	3360 7400	3460 7620	3200 7050	3070 6760	2920 6430	2.5 36	4960 10930	4530 9980
							2.4 **35**	3740 8240	3850 8480	3560 7840	3410 7510	**3250** **7160**	3 44	5530 12180	5040 11100

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimensions SW mm in	Unloaded Dimensions OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph: Field Operations	Non-Cyclic Operations 25	40	50	65	Infl. Press. bar psi	Speed kmph mph: Cyclic Operations 10	15
								16	25	31	40		6	9
							Maximum Load				kg lbs		Recom. Load	kg lbs
600/65 R 28	147 D	**DW20B** W18L	591 23.3	1491 58.7	668 26	4473 176	0.8 12	2350 5180	2420 5330	2230 4910	2140 4710	2040 4490	1 15	3470 7640	3160 6960
							1 15	2680 5900	2760 6080	2550 5620	2450 5400	2330 5130	1.25 18	3960 8720	3610 7950
							1.3 19	3130 6890	3220 7090	2980 6560	2860 6300	2720 5990	1.63 24	4620 10180	4220 9330
							1.6 **23**	3540 7800	3640 8020	3370 7420	3230 7110	**3075** **6770**	2 29	5230 11520	4770 10510
600/65 R 28	154 D	**DW20B** W18L	591 23.3	1491 58.7	668 26	4473 176	1.8 26	3650 8040	3760 8280	3470 7640	3330 7330	3170 6980	2.25 33	5390 11870	4910 10810
							2.0 29	3880 8550	3990 8790	3690 8130	3540 7800	3370 7420	2.5 36	5730 12620	5220 11500
							2.2 32	4090 9010	4220 9300	3900 8590	3740 8240	3560 7840	2.75 40	6050 13330	5520 12160
							2.4 **35**	4310 9490	4440 9780	4110 9050	3940 8680	**3750** **8260**	3 44	6380 14050	5810 12800
R 30															
540/65 R 30	143 D	**W16L** W18L	550 21.7	1464 57.6	666 26	4338 170.8	0.8 12	2090 4600	2160 4760	1990 4380	1910 4210	1820 4010	1 15	3090 6810	2820 6210
							1 15	2380 5240	2450 5400	2270 5000	2170 4780	2070 4560	1.25 18	3520 7750	3210 7070
							1.3 19	2770 6100	2860 6300	2640 5810	2530 5570	2410 5310	1.625 24	4100 9030	3740 8240
							1.6 **23**	3130 6890	3230 7110	2980 6560	2860 6300	**2725** **6000**	2 29	4630 10200	4220 9300
540/65 R 30	150 D	**W16L** W18L	550 21.7	1464 57.6	666 26	4338 170.8	0.8 12	2020 4450	2090 4600	1930 4250	1850 4070	1760 3880	1 15	2990 6590	2730 6010
							1 15	2310 5090	2380 5240	2200 4850	2110 4650	2010 4430	1.25 18	3420 7530	3120 6870
							1.3 19	2690 5930	2770 6100	2560 5640	2460 5420	2340 5150	1.625 24	3980 8770	3630 8000
							2.4 **35**	3850 8480	3970 8740	3670 8080	3520 7750	**3350** **7380**	3 44	5700 12560	5190 11430
600/65 R 30	149 D	**DW20B** W18L	611 24.1	1542 60.7	693 27	4628 182	0.8 12	2500 5510	2570 5660	2380 5240	2280 5020	2170 4780	1 15	3690 8130	3360 7400
							1 15	2840 6260	2930 6450	2700 5950	2590 5700	2470 5440	1.25 18	4200 9250	3830 8440
							1.3 19	3310 7290	3410 7510	3150 6940	3020 6650	2880 6340	1.63 24	4900 10790	4460 9820
							1.6 **23**	3740 8240	3850 8480	3560 7840	3410 7510	**3250** **7160**	2 29	5530 12180	5040 11100

These are tubeless tyres

	Size	LI/SS	Rim	Unloaded Dimensions SW mm in	Unloaded Dimensions OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph: Field Operations	Speed kmph mph: Non-Cyclic Operations 25	40	50	65	Infl. Press. bar psi	Speed kmph mph: Cyclic Operations 10	15
										16	25	31	40		6	9
								bar psi	Maximum Load kg lbs					bar psi	Recom. Load kg lbs	
R 34	540/65 R 34	145 D	**W16L** W18L	550 21.7	1566 61.7	717 28	4659 183.4	0.8 12	2220 4890	2290 5040	2110 4650	2030 4470	1930 4250	1 15	3280 7220	2990 6590
								1 15	2530 5570	2610 5750	2410 5310	2310 5090	2200 4850	1.25 18	3740 8240	3410 7510
								1.3 19	2960 6520	3050 6720	2810 6190	2700 5950	2570 5660	1.625 24	4370 9630	3980 8770
								1.6 23	3340 7360	3440 7580	3180 7000	3050 6720	**2900 6390**	2 29	4930 10860	4500 9910
	540/65 R 34	152 D	**W16L** W18L	550 21.7	1566 61.7	717 28	4659 183.4	0.8 12	2150 4740	2220 4890	2050 4520	1960 4320	1870 4120	1 15	3180 7000	2900 6390
								1 15	2450 5400	2520 5550	2330 5130	2240 4930	2130 4690	1.3 18	3620 7970	3300 7270
								1.3 19	2850 6280	2940 6480	2720 5990	2600 5730	2480 5460	1.6 24	4220 9300	3840 8460
								2.4 35	4080 8990	4210 9270	3890 8570	3730 8220	**3550 7820**	3 44	6040 13300	5500 12110
	600/65 R 34	151D	**DW20B** W18L	600 23.6	1644 64.7	748 29.4	4916 193.5	0.8 12	2650 5840	2730 6010	2520 5550	2420 5330	2300 5070	1 15	3910 8610	3570 7860
								1 15	3010 6630	3100 6830	2870 6320	2750 6060	2620 5770	1.25 18	4450 9800	4060 8940
								1.3 19	3520 7750	3630 8000	3350 7380	3210 7070	3060 6740	1.63 24	5200 11450	4740 10440
								1.6 23	3970 8740	4090 9010	3780 8330	3620 7970	**3450 7600**	**2** 29	5870 12930	5350 11780
	600/65 R 34	157 D	**DW20B** W18L	600 23.6	1644 64.7	748 29.4	4816 193.5	1.8 26	4010 8830	4140 9120	3820 8410	3660 8060	3490 7690	2.3 33	5930 13060	5410 11920
								2.0 29	4270 9410	4400 9690	4060 8940	3900 8590	3710 8170	2.5 36	6310 13900	5750 12670
								2.2 32	4510 9930	4650 10240	4290 9450	4120 9070	3920 8630	2.8 40	6660 14670	6080 13390
								2.4 35	4740 10440	4890 10770	4520 9960	4330 9540	**4125 9090**	3 44	7010 15440	6390 14070
R 38	540/65 R 38	147 D	**W16L** W18L	550 21.7	1667 65.6	767 30	4975 196	0.8 12	2350 5180	2420 5330	2230 4910	2140 4710	2040 4490	1 15	3470 7640	3160 6960
								1 15	2680 5900	2760 6080	2550 5620	2450 5400	2330 5130	1.25 18	3960 8720	3610 7950
								1.3 19	3130 6890	3220 7090	2980 6560	2860 6300	2720 5990	1.625 24	4620 10180	4220 9300
								1.6 23	3540 7800	3640 8020	3370 7420	3230 7110	**3075 6770**	2 29	5230 11520	4770 10510
	540/65 R 38	153 D	**W16L** W18L	550 21.7	1667 65.6	767 30	4975 196	1.8 26	3540 7800	3650 8040	3370 7420	3230 7110	3080 6780	2.25 33	5240 11540	4770 10510
								2.0 29	3770 8300	3890 8570	3590 7910	3440 7580	3280 7220	2.5 36	5580 12290	5080 11190
								2.2 32	3990 8790	4110 9050	3800 8370	3640 8020	3470 7640	2.8 40	5900 13000	5380 11850
								2.4 35	4200 9250	4330 9540	4000 8810	3830 6440	**3650 8040**	3 44	6210 13680	5660 12470
	600/65 R 38	153 D	**DW20B** W18L	600 23.6	1745 68.7	798 31.4	5236 206.2	0.8 12	2790 6150	2880 6340	2660 5860	2550 5620	2430 5350	1 15	4130 9100	3770 8300
								1 15	3190 7030	3280 7220	3030 6670	2910 6410	2770 6100	1.25 18	4710 10370	4290 9450
								1.3 19	3710 8170	3830 8440	3540 7800	3390 7470	3230 7110	1.625 24	5490 12090	5010 11040
								1.6 23	4200 9250	4330 9540	4000 8810	3830 8440	**3650 8040**	2 29	6210 13680	5660 12470
	650/65 R 38	157 D	**DW20B**	645 25.4	1811 216.1	825 32.5	5489 216.1	0.8 20	3160 6960	3260 7180	3010 6630	2890 6370	2750 6060	1 15	4680 10310	4260 9380
								1 23	3600 7930	3710 8170	3430 7560	3290 7250	3130 6890	1.3 18	5320 11720	4850 10680
								1.3 29	4200 9250	4330 9540	4000 8810	3830 8440	3650 8040	1.6 24	6210 13680	5660 12470
								1.6 35	4740 10440	4890 10770	4520 9960	4330 9540	**4125 9090**	2 29	7010 15440	6390 14070
	650/65 R 38	163 D	**DW20B**	645 25.4	1811 71.3	825 32.5	5489 216.1	1.4 20	4080 8990	4210 9270	3890 8570	3730 8220	3550 7820	1.75 25	6040 13300	5500 12110
								1.6 23	4420 9740	4550 10020	4200 9250	4030 8880	3840 8460	2 29	6530 14380	5950 13110
								2.0 29	5040 11100	5190 11430	4800 10570	4600 10130	4380 9650	2.5 36	7450 16410	6790 14960
								2.4 35	5610 12360	5780 12730	5340 11760	5120 11280	**4875 10740**	3 44	8290 18260	7650 16650
R 42	650/65 R 42	158 D	**DW20B** W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	0.8 12	3250 7160	3350 7380	3100 6830	2970 6540	2830 6230	1 15	4810 10590	4390 9670
								1 15	3710 8170	3830 8440	3540 7800	3390 7470	3230 7110	1.25 18	5490 12090	5010 11040
								1.3 19	4320 9520	4460 9820	4120 9070	3950 8700	3760 8280	1.63 24	6390 14070	5830 12840
								1.6 23	4890 10770	5040 11100	4650 10240	4460 9820	**4250 9360**	2 29	7230 15930	6590 14520

These are tubeless tyres

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimensions SW mm in	Unloaded Dimensions OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph: Field Operations	Non-Cyclic Operations 25	40	50	65	Maximum Load kg lbs
									16	25	31	40	
R 42 650/65 R 42	165 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	1.8 26	4990 10990	5140 11320	4750 10460	4560 10040	4340 9560	
							2 29	5310 11700	5470 12050	5060 11150	4850 10680	4620 10180	
							2.2 32	5620 12380	5790 12750	5350 11780	5130 11300	4890 10770	
							2.4 35	5920 13040	6100 13440	5640 12420	5410 11920	**5150 11340**	
650/65 R 42	170 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	2.4 35	5840 12860	6020 13260	5560 12250	5330 11740	5080 11740	
							2.8 41	6390 14070	6590 14520	6090 13410	5480 12860	5840 12860	
							3 44	6660 14670	6860 15110	6340 13960	6080 13390	6080 13390	
							3.2 46	6900 15200	7110 15660	6570 14470	6300 13880	**6000 13220**	

Infl. Press. bar psi	Speed kmph mph: Cyclic Operations 10	15	Recom. Load kg lbs
	6	9	
2.25 33	7380 16260	6730 14820	
2.50 36	7850 17290	7160 15770	
2.75 40	8310 18300	7580 16700	
3 44	8760 19300	7980 17580	
3 44	8640 19030	7870 17330	
3.50 51	9450 20810	8620 18990	
3.75 54	9840 21670	8970 19760	
4 58	10200 22470	9300 20480	

These are tubeless tyres

TORQUEMAX

WITH THE POWER OF CTR*

FEATURE
- Stepped lug design

BENEFIT
- Better Grip

FEATURE
- Tilted lug tip

BENEFIT
- Lower vibration at high speeds.

FEATURE
- Stronger and wider lugs

BENEFIT
- Higher contact area leading to higher life

FEATURE
- Rounded shoulder

BENEFIT
- Less soil / crop damage

FEATURE
- Lower lug angle at the shoulder

BENEFIT
- Better traction

FEATURES
- Wider tread width

BENEFIT
- Lower compaction

TORQUEMAX

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed, kmph (mph) Static	10	20	30	40	50	65
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs						
R 30														
600/70 R 30	165 D	DW20 **DW21**	605 23.8	1602 63.1	726 28.6	4781 188.2	0.8 12	3430 7560	2920 6430	2810 6190	2700 5950	2460 5420	3110 6850	2960 6520
							1.2 17	4340 9560	3690 8130	3560 7840	3420 7530	3110 6850	3930 8660	3740 8240
							1.6 23	5140 11320	4370 9630	4210 9270	4050 8920	3690 8130	4660 10260	4430 9760
							2 29	5870 12930	4990 10990	4800 10570	4620 10180	4200 9250	5310 11700	5060 11150
							2.2 32	6210 13680	5280 11630	5090 11210	4890 10770	4450 9800	5620 12380	5350 11780
							2.4 **35**	6540 14410	5560 12250	5360 11810	**5150** **11340**	4690 10330	5920 13040	5640 12420
R 34														
600/70 R 34	160 D	DW20 **DW21**	605 23.8	1708 67.2	777 30.6	5086 200.2	0.8 12	3840 8460	3260 7180	3140 6920	3020 6650	2750 6060	3470 7640	3310 7290
							1 15	4370 9630	3720 8190	3580 7890	3440 7580	3130 6890	3960 8720	3770 8300
							1.2 17	4860 10700	4140 9120	3980 8770	3830 8440	3490 7690	4400 9690	4190 9230
							1.4 2	5320 11720	4530 9980	4360 9600	4190 9230	3810 8390	4820 10620	4590 10110
							1.6 **23**	5750 12670	4890 10770	4710 10370	**4530** **9980**	4120 9070	5210 11480	4960 10930
600/70 R 34	167 D	DW20 **DW21**	605 23.8	1708 67.2	777 30.6	5086 200.2	0.8 12	3630 8000	3090 6810	2970 6540	2860 6300	2600 5730	3290 7250	3130 6890
							1.2 17	4610 10150	3920 8630	3780 8330	3630 8000	3300 7270	4170 9190	3970 8740
							1.6 23	5460 12030	4640 10220	4470 9850	4300 9470	3910 8610	4950 10900	4710 10370
							2 29	6220 13700	5290 11650	5100 11230	4900 10790	4460 9820	5640 12420	5370 11830
							2.2 32	6580 14490	5590 12310	5390 11870	5180 11410	4710 10370	5960 13130	5670 12490
							2.4 **35**	6920 15240	5890 12970	5670 12490	5450 12000	**4960** **10930**	6270 13810	5970 13150
650/60 R 34	159 D	**DW23B**	650 25.6	1644 64.7	735 29.6	4855 191.1	0.8 12	3710 8170	3150 6940	3040 6700	2920 6430	2660 5860	3360 7400	3200 7050
							1 15	4230 9320	3600 7930	3460 7620	3330 7330	3030 6670	3830 8440	3650 8040
							1.2 17	4700 10350	4000 8810	3850 8480	3700 8150	3370 7420	4260 9380	4050 8920
							1.6 **23**	5560 12250	4730 10420	4550 10020	4375 9640	3980 8770	5030 11080	**4790** **10550**

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed, kmph (mph) Static	10	20	30	40	50	65
			mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs						
R 38														
520/85 R 38	167 D	DW20 **DW18**	526 20.7	1849 72.8	841 33.1	5518 217.3	0.8 12	3630 8000	3090 6810	2970 6540	2860 6300	2600 5730	3290 7250	3130 6890
							1.2 17	4610 10150	3920 8630	3780 8330	3630 8000	3300 7270	4170 9190	3970 8740
							1.6 23	5460 12030	4640 10220	4470 9850	4300 9470	3910 8610	4950 10900	4710 10370
							2 29	6220 13700	5290 11650	5100 11230	4900 10790	4460 9820	5640 12420	5370 11830
							2.2 32	6580 14490	5590 12310	5390 11870	5180 11410	4710 10370	5960 13130	5670 12490
							2.4 **35**	6920 15240	5890 12970	5670 12490	**5450** **12000**	4960 10930	6270 13810	5970 13150

FARMAX HPT

WITH THE POWER OF CTR*

FEATURE
- Increased lug width

BENEFIT
- Provides longer service life

FEATURE
- Tilted lug tip

BENEFIT
- Reduced vibration

FEATURE
- Lower lug angle at the shoulder

BENEFIT
- Better traction

FEATURE
- Wide tread width

BENEFIT
- Lower Compaction

FEATURE
- Rounded shoulder

BENEFIT
- Reduced soil disturbance

	Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed, MPH / kmph: Static Maximum Load	10 6	20 12	30 18 kg lbs	40 25	50 30	65 40
R 38	650/85 R 38	170 D 173 A8	DW21B, DW20B, **DW23B**	675 26.6	2071 81.5	947 37	6181 243	0.8 12	3930 8660	5130 11300	4210 9270	3930 8660	3740 8240	3590 7910	3420 7530
								1.2 17	4980 10970	6500 14320	5330 11740	4980 10970	4740 10440	4550 10020	4330 9540
								1.6 23	5890 12970	7680 16920	6300 13880	5890 12970	5610 12360	5380 11850	5120 11280
								1.8 26	6300 13880	8220 18110	6740 14850	6300 13880	6000 13220	5750 12670	5480 12070
								2.1 30	6900 15200	9000 19820	7750 17070	6900 15200	6570 14470	6300 13880	**6000 13220**
	650/85 R 38	173 D 176 A8	DW21B, DW20B, **DW23B**	675 26.6	2071 81.5	947 37	6181 243	1.0 15	4470 9850	5840 12860	4780 10530	4470 9850	4260 9380	4080 8990	3890 8570
								1.4 20	5450 12000	7110 15660	5830 12840	5450 12000	5190 11430	4980 10970	4740 10440
								2.0 29	6720 14800	8760 19300	7180 15810	6720 14800	6390 14070	6130 13500	5840 12860
								2.4 35	7480 16480	9750 21480	8400 18500	7480 16480	7120 15680	6830 15040	**6500 14320**
R 50	480/80 R50	159D 162A8	DW15L **DW16L**	485 19.1	2038 80.2	950 37.4	6082 239.5	0.8 12	5290 11650	3450 7600	2830 6230	2650 5840	2520 5550	2420 5330	2300 5070
								1.2 17	6720 14800	4380 9650	3590 7910	3360 7400	3200 7050	3070 6760	2920 6430
								1.6 23	7940 17490	5180 11410	4240 9340	3970 8740	3780 8330	3620 7970	3450 7600
								1.8 26	8510 18740	5550 12220	4550 10020	4260 9380	4050 8920	3890 8570	3700 8150
								2 29	9040 19910	5900 13000	4830 10640	4520 9960	4300 9470	4130 9100	3930 8660
								2.4 35	10060 22160	6560 14450	5380 11850	5030 11080	4790 10550	4590 10110	**4375 9640**
	480/80 R50	165D 168A8	DW15L **DW16L**	485 19.1	2038 80.2	950 37.4	6082 239.5	0.8 12	5270 11610	3440 7580	2630 5790	2510 5530	2400 5290	2290 5040	2300 5070
								1.2 17	6670 14690	4350 9580	3340 7360	3180 7000	3050 6720	2900 6390	2920 6430
								1.6 23	7890 17380	5150 11340	3940 8680	3760 8280	3600 7930	3430 7560	3450 7600
								1.8 26	8460 18630	5520 12160	4230 9320	4030 8880	3860 8500	3680 8110	3700 8150
								2 29	8990 19800	5870 12930	4500 9910	4280 9430	4110 9050	3910 8610	3930 8660
								3.2 46	11850 26100	7730 17030	5920 13040	5640 12420	5410 11920	5150 11340	**4375 9640**

*CTR-Low Compaction, High Traction, High Roadability

ROW CROP AGRI RADIAL

WITH THE POWER OF CTR*

FEATURE
- Higher angle and lug overlap at centre

BENEFIT
- Better roadability and stability

FEATURE
- Rounded shoulder

BENEFIT
- Reduced crop damage

FEATURE
- Higher number of lugs

BENEFIT
- Superior traction

FEATURE
- D-rated (65 kmph) tyres

BENEFIT
- Improved transportation speed

FEATURE
- Strong carcass and bead

BENEFIT
- Higher load carrying capacity

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph: Field	10 6	25 16	40 25	50 31	65 40	70
								Maximum Load kg lbs						
ROW CROP														
R 32														
210/95 R 32	117 D 120 A8	**W7** W6	214 8.4	1213 47.8	567 22.3	3696 145.5	2.0 29	1130 2490	1470 3240	1160 2560	1070 2360	1030 2270	980 2160	
							2.4 35	1250 2750	1640 3610	1290 2840	1190 2620	1140 2510	1090 2400	
							3.0 44	1430 3150	1860 4100	1470 3240	1360 3000	1300 2860	1240 2730	
							3.2 **46**	1480 3260	1930 4250	1520 3350	**1410** **3110**	1350 2970	1285 2830	
230/95 R 32	128 D 131 A8/B	**W7** W8	228 9.0	1251 49.3	588 23.1	3808 149.9	2.8 41	1680 3700	2190 4820	1730 3810	1600 3520	1530 3370	1460 3220	
							3.6 52	1940 4270	2540 5590	2000 4410	1850 4070	1770 3900	1690 3720	
							4 **58**	2070 5970	2700 5950	2130 4690	**1970** **4340**	1890 4160	1800 3960	
270/95 R 32 (11.2 R 32)	133 D 136 A8/B	W11 **W12** W13	275 10.8	1327 52.2	613 24.0	4002 157.6	2.8 41	1920 4230	2510 5530	1980 4360	1830 4030	1750 3850	1670 3680	
							3.6 52	2230 4910	2910 6410	2300 5070	2120 4670	2040 4490	1940 4270	
							4 **58**	2370 5220	3090 6810	2440 5370	**2260** **4980**	2160 4760	2060 4540	
R 36														
230/95 R 36	127 D 130 A8	**W7** W8	228 9.0	1352 53.2	633 24.9	4015 158.1	2.8 41	1630 3590	2130 4690	1680 3700	1550 3410	1490 3280	1420 3130	
							3.6 52	1900 4190	2480 5460	1960 4320	1810 3990	1730 3810	1650 3630	
							4 **58**	2010 4430	2630 5790	2070 4560	**1920** **4230**	1840 4050	1750 3850	
230/95 R 36	130 D 133 A8	W8 **W7**	228 9.0	1352 53.2	633 24.9	4015 158.1	3.4 49	1830 4030	2390 5260	1880 4140	1740 3830	1670 3680	1590 3500	
							3.6 52	1900 4190	2480 5460	1960 4320	1810 3990	1730 3810	1650 3630	
							4.0 58	2010 4430	2630 5790	2070 4560	1920 4230	1840 4050	1750 3850	
							4.2 61	2070 4560	2700 5950	2130 4690	1970 4340	1890 4160	1800 3960	
							4.4 64	2130 4690	2780 6120	2190 4820	2030 4470	1940 4270	1850 4070	
							4.6 **67**	2190 4820	2850 6280	2250 4960	**2080** **4580**	2000 4410	1900 4190	
270/95 R 36 (11.2 R 36)	136 D 139 A8	**W9** W8 W10	275 10.8	1427 56.2	670 26.4	4349 171.2	2.8 41	2090 4600	2730 6010	2160 4760	1990 4380	1910 4210	1820 4010	
							3.6 52	2430 5350	3170 6980	2500 5510	2310 5090	2220 4890	2110 4650	
							4 **58**	2580 5680	3360 7400	2650 5840	**2450** **5400**	2350 5180	2240 4930	

*CTR-Low Compaction, High Traction, High Roadability

These are tubeless tyres

	Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph: Field	10 6	25 16	40 25	50 31	65 40	70
				mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs						
R 38	270/95 R 38 (11.2 R 38)	137 D 140 A8	**W9** W8 W10	275 10.8	1479 58.2	689 27.1	4507 177.4	2.8 41	2140 4710	2790 6150	2200 4850	2040 4490	1950 4300	1860 4100	
								3.6 52	2480 5460	3240 7140	2560 5640	2370 5220	2270 5000	2160 4760	
								4 58	2650 5840	3450 7600	2730 6010	**2520 5550**	2420 5330	2300 5070	
	270/95 R 38 (11.2 R 38)	140 D 143 A8/B	**W9** W8 W10	275 10.8	1479 58.2	689 27.3	4507 177.4	2.8 41	2140 4710	2790 6150	2200 4850	2040 4490	1950 4300	1860 4100	
								3.6 52	2480 5460	3240 7140	2560 5640	2370 5220	2270 5000	2160 4760	
								4 58	2650 5840	3450 7600	2730 6010	2520 5550	2420 5330	2300 5070	
								4.6 67	2880 6340	3750 8260	2960 6520	**2740 6040**	2630 5790	2500 5510	
R 40	230/95 R40	132D 135A8	**W8** W7	228 9.0	1454 57.2	684 26.9	4385 172.6	2.8 41	1990 4380	2600 5730	2050 4520	1890 4160	1820 4010	1730 3810	1570 3460
								3.2 46	2150 4740	2810 6190	2220 4890	2050 4520	1960 4320	1870 4120	1700 3740
								3.6 52	2300 5070	3000 6610	2370 5220	2190 4820	2100 4630	2000 4410	1820 4010
								3.6 52	2300 5070	3000 6610	2370 5220	**2190 4820**	2100 4630	2000 4410	1820 4010
R 42	230/95 R42	133D 136A8	**W8** W7	228 9.0	1505 59.3	714 28.1	4492 177.4	2.8 41	1920 4230	2510 5530	1980 4360	1830 4030	1750 3850	1670 3680	1520 3350
								3.0 44	2000 4410	2610 5750	2060 4540	1910 4210	1830 4030	1740 3830	1580 3480
								3.2 46	2080 4580	2720 5990	2140 4710	1980 4360	1900 4190	1810 3990	1650 3630
								3.6 52	2230 4910	2910 6410	2300 5070	2120 4670	2040 4490	1940 4270	1770 3900
								4.0 58	2370 5220	3090 6810	2440 5370	**2260 4980**	2160 4760	2060 4540	1870 4120
	270/95 R 42 (11.2 R 42)	137 D 140 A8	**W9** W8 W10	275 10.8	1581 62.2	740 29.1	4790 188.7	2.8 41	2290 5040	2990 6590	2360 5200	2180 4800	2090 4600	1990 4380	
								3.2 46	2470 5440	3230 7110	2550 5620	2350 5180	2260 4980	2150 4740	
								4 58	2650 5840	3450 7600	2730 6010	**2520 5550**	2420 5330	2300 5070	
	270/95 R 42 (11.2 R 42)	139 D 142 A8/B	**W9** W8 W10	275 10.8	1581 62.2	740 29.1	4793 188.7	2.8 41	2290 5040	2990 6590	2360 5200	2180 4800	2090 4600	1990 4380	
								3.2 46	2470 5440	3230 7110	2550 5620	2350 5180	2260 4980	2150 4740	
								3.6 52	2650 5840	3450 7600	2730 6010	2520 5550	2420 5330	2300 5070	
								4.0 58	2790 6150	3650 8040	2880 6340	**2660 5860**	2550 5620	2430 5350	

	Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph: Field	10 6	25 16	40 25	50 31	65 40	70
				mm in	mm in	mm in	mm in	bar psi	Maximum Load kg lbs						
	320/80 R 42 (12.4 R 42)	141 A8/B	**W10**	320 12.6	1580 62.2	744 29.3	4688 184.6	1.2 17	3340 7360	2180 4800	1780 3920	1550 3410	1450 3190	-	
								1.6 23	3960 8720	2580 5680	2120 4670	1840 4050	1720 3790	-	
								2.4 35	5010 11040	3270 7200	2680 5900	2330 5130	2180 4800	-	
								3.2 46	5920 13040	3860 8500	3170 6980	**2760 6080**	2575 5670	-	
	320/90 R 42	136 D 139 A8	W9 **W10** W11	319 12.6	1643 64.7	764 30.1	4950 194.9	1.8 26	170 4780	2840 6260	2240 4930	2070 4560	1980 4360	1890 4160	
								2 29	2310 5090	3020 6650	2380 5240	2200 4850	2110 4650	2010 4430	
								2.2 32	2450 5400	3200 7050	2520 5550	2330 5130	2240 4930	2130 4690	
								2.4 35	2580 5680	3360 7400	2650 5840	**2450 5400**	2350 5180	2240 4930	
	320/90 R 42	144 D 147 A8	**W10** W9 W11	319 12.6	1643 64.7	764 30.1	4950 194.9	2.8 41	2770 6100	3620 7970	2860 6300	2640 5810	2530 5570	2410 5310	
								3.2 46	3000 6610	3920 8630	3090 6810	2860 6300	2740 6040	2610 5750	
								3.6 52	3220 7090	4200 9250	3320 7310	**3070 6760**	2940 6480	2800 6170	
R 44	230/95 R 44	129 D 132 A8	**W7** W8	228 9.0	1556 61.3	735 28.9	4812 189.5	2.8 41	1840 4050	2400 5290	1900 4190	1750 3850	1680 3700	1600 3520	
								3.2 46	1990 4380	2600 5730	2050 4520	1890 4160	1730 3810	1730 3810	
								3.6 52	2130 3490	2780 6120	2190 4820	**2030 4470**	1850 4070	1850 4070	
	230/95 R 44	134 D 137 A8	**W9** W8 W10	228 9.5	1556 61.3	735 28.9	4812 189.5	3.6 52	2120 4670	2760 6080	2180 4800	2010 4430	1930 4250	1840 4050	
								3.8 55	2190 4820	2850 6280	2250 4960	2080 4580	2000 4410	1900 4190	
								4.2 61	2310 5090	3020 6650	2380 5240	2200 4850	2110 4650	2010 4430	
								4.6 67	2440 5370	3180 7000	2510 5530	**2330 5110**	2230 4910	2120 4670	
	270/95 R 44	140 D 143 A8	**W9** W8 W10	275 10.8	1632 64.3	765 30.1	4948 194.8	2.8 41	2330 5130	3050 6720	2410 5310	2220 4890	2130 4690	2030 4470	
								3.6 52	2700 5950	3530 7780	2780 6120	2570 5660	2470 5440	2350 5180	
								4 58	2880 6340	3750 8260	2960 6520	**2740 6040**	2630 5790	2500 5510	
	270/95 R 44 (11.2 R 44)	142 D 145 A8	**W9** W8 W10	275 10.8	1632 64.3	765 30.1	4948 194.8	2.8 41	2330 5130	3050 6720	2410 5310	2220 4890	2130 4690	2030 4470	
								3.6 52	2700 5950	3530 7780	2780 6120	2570 5660	2470 5440	2350 5180	
								4 58	2880 6340	3750 8260	2960 6520	2740 6040	2630 5790	2500 5510	
								4.4 64	3050 6720	3980 8770	3140 6920	**2900 6390**	2780 6120	2650 5840	

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Field	10 6	25 16	40 25	50 31	65 40	70
								Maximum Load kg lbs						
R 46														
340/85 R 46	147 D 150 A8	**W11** W12	343 13.5	1746 68.7	816 32.1	5310 209.0	2.8 41	3050 6720	3980 8770	3140 6920	2900 6390	2780 6120	2650 5840	
							3.2 46	3300 7270	4310 9490	3400 7490	3140 6920	3010 6630	2870 6320	
							3.6 **52**	3540 7800	4610 10150	3640 8020	**3370** **7420**	3230 7110	3075 6770	
380/90 R 46 (14.9 R 46)	159 D 162 A8/B	W11 **W12** W13	380 15.0	1852 72.9	864 34.0	5466 215.2	3.4 49	4580 10090	5970 13150	4720 10400	4360 9600	4180 9210	3980 8770	
							3.6 52	4740 10440	6180 13610	4880 10750	4510 9930	4330 9540	4120 9070	
							3.8 55	4890 10770	6380 14050	5040 11100	4650 10240	4460 9820	450 9360	
							4.0 **58**	5030 11080	6560 14450	5180 11410	**4750** **10472**	4590 10110	4375 9640	
380/90 R 46 (14.9 R 46)	165 A8/B	W11 **W12** W13	380 15.0	1852 72.9	864 34.0	5466 215.2	3.5 51	4910 10810	6410 14120	5120 11280	4270 9410	4270 9410	-	
							4 58	5310 11700	6930 15260	5540 12200	4620 10180	4620 10180	-	
							4.4 64	5620 12380	7340 16170	5870 12930	4890 10770	4890 10770	-	
							4.8 **70**	5920 13040	7730 17030	6180 13610	**5150** **11340**	5150 11340	-	
270/95 R 46	141 D 144 A8	**W9** W8 W10	275 10.8	1682 66.2	790 31.1	5126 201.8	2.8 41	2400 5290	3140 6920	2480 5460	2290 5040	2190 4820	2090 4600	
							3.6 52	2780 6120	3630 8000	2870 6320	2650 5840	2540 5590	2420 5330	
							4 **58**	2960 6520	3860 8500	3050 6720	**2820** **6210**	2700 5950	2575 5670	
300/95 R 46 (12.4 R 46)	143 D 146 A8	**W9** W10	300 11.8	1738 68.4	817 32.1	5155 203	2.4 35	2470 5440	3230 7110	2550 5620	2370 5220	2260 4980	2150 4740	
							2.8 41	2700 5950	3530 7780	2780 6120	2590 5700	2470 5440	2350 5180	
							3.2 46	2920 6430	3810 8390	3010 6630	2790 6150	2670 5880	2540 5590	
							3.6 **52**	3130 6890	4090 9010	3230 7110	**3000** **6610**	2860 6300	2725 6000	
300/95 R 46 (12.4 R 46)	148 D 151 A8	**W9** W10	300 11.8	1738 68.4	817 32.2	5155 203	2.4 35	2690 5930	3510 7730	2770 6100	2560 5640	2460 5420	2340 5150	
							2.8 41	2940 6480	3840 8460	3030 6670	2800 6170	2690 5930	2560 5640	
							3.6 52	3400 7490	4440 9780	3510 7730	3240 7140	3110 6850	2960 6520	
							4 **58**	3620 7970	4730 10420	3730 8220	**3450** **7600**	3310 7290	3150 6940	

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph Field	10 6	25 16	40 25	50 31	65 40	70
								Maximum Load kg lbs						
R 48														
230/95 R 48 (9.5 R 48)	136D 139A8	**W7** W8	228 8.97	1657 65.23	785 30.9	5049 198.7	2.8 41	2090 4600	2730 6010	2160 4760	1990 4380	1910 4210	1820 4010	
							3.2 46	2270 5000	2960 6520	2330 5130	2160 4760	2070 4560	1970 4340	
							3.6 52	2430 5350	3170 6980	2500 5510	2310 5090	2220 4890	2110 4650	
							4 **58**	2580 5680	3360 7400	2650 5840	**2450** **5400**	2350 5180	2240 4930	
270/95 R 48 (11.2 R 48)	142D 145A8	**W9** W8 W10	275 10.83	1733 68.23	816 32.13	5281 207.9	2.4 35	2390 5260	3120 6870	2460 5420	2280 5020	2180 4800	2080 4580	
							2.8 41	2620 5770	3420 7530	2700 5950	2500 5510	2390 5260	2280 5020	
							3.2 46	2840 6260	3710 8170	2930 6450	2700 5950	2590 5700	2470 5440	
							3.6 **52**	3050 6720	3980 8770	3140 6920	**2900** **6390**	2780 6120	2650 5840	
340/85 R 48 (13.6 R 48)	148D 151A8	**W12** W11	343 13.5	1797 70.7	841 33.1	5476 215.5	2.4 35	2860 6300	3740 8240	2950 6500	2730 6010	2610 5750	2490 5480	
							2.8 41	3130 6890	4080 8990	3220 7090	2980 6560	2860 6300	2720 5990	
							3.2 46	3380 7440	4410 9710	3480 7670	3220 7090	3090 6810	2940 6480	
							3.6 **52**	3620 7970	4730 10420	3730 8220	**3450** **7600**	3310 7290	3150 6940	
R 50														
320/90 R 50	150D 153A8	**W12** W11	343 13.5	1797 70.7	841 33.1	5476 215.5	2.8 41	3320 7310	4340 9560	3420 7530	3160 6960	3030 6670	2890 6370	2630 5790
							3.0 44	3460 7620	4520 9960	3570 7860	3300 7270	3160 6960	3010 6630	2740 6040
							3.4 49	3730 8220	4860 10700	3840 8460	3550 7820	3400 7490	3240 7140	2950 6500
							3.6 **52**	3850 8480	5030 11080	3970 8740	**3670** **8080**	3520 7750	3350 7380	3050 6720
380/90 R 50	151D 154 A8	**W12** **W11** **W13**	390 15.4	1954 76.9	918 36.1	5951 234.3	1.8 26	3360 7400	4380 9650	3460 7620	3200 7050	3070 6760	2920 6430	2660 5860
							2.0 29	3570 7860	4650 10240	3670 8080	3390 7470	3260 7180	3100 6830	2820 6210
							2.2 32	3770 8300	4920 10840	3890 8570	3590 7910	3440 7580	3280 7220	2980 6560
							2.4 **35**	3970 8740	5180 11410	4090 9010	**3780** **8330**	3620 7970	**3450** **7600**	3140 6920
380/90 R 50 (14.9 R 50)	158D 161A8	**W12** **W11** **W13**	390 15.4	1954 76.9	918 36.1	5951 234.3	2.4 35	3360 7400	4380 9650	3460 7620	3200 7050	3070 6760	2920 6430	2660 5860
							2.8 41	3670 8080	4790 10550	3780 8330	3490 7690	3350 7380	3190 7030	2900 6390
							3.2 46	3970 8740	5180 11410	4090 9010	3780 8330	3620 7970	3450 7600	3140 6920
							3.6 **52**	4890 10770	6380 14050	5040 11100	**4650** **10240**	4460 9820	**4250** **9360**	3870 8520

These are tubeless tyres

Size	LI/SS	Rim	Unloaded Dimension SW	Unloaded Dimension OD	SLR	RC	Infl. Press.	Speed kmph mph Field	10	25	40	50	65	70
			mm in	mm in	mm in	mm in	bar psi	Maximum Load			kg lbs			
ROW CROP														
R 52							0.8 12	1470 3240	1920 4230	1520 3350	1410 3110	1340 2950	1280 2820	1160 2560
							1.2 17	1860 4100	2430 5350	1920 4230	1780 3920	1700 3740	1620 3570	1470 3240
							1.8 26	2360 5200	3080 6780	2430 5350	2260 4980	2150 4740	2050 4520	1870 4120
							2.4 35	2780 6120	3630 8000	2870 6320	2660 5860	2540 5590	2420 5330	2200 4850
	300/95 R 52 (12.4 R 52)	149D/ 152A8	**W9** W10	300 11.8	1891 74.4	892 35.1	5792 228.0	2.8 41	3050 6720	3980 8770	3140 6920	2920 6430	2780 6120	2650 5840	2410 5310
							3.2 46	3290 7250	4290 9450	3390 7470	3150 6940	3000 6610	2860 6300	2600 5730
							3.6 52	3520 7750	4590 10110	3630 8000	3370 7420	3210 7070	3060 6740	2780 6120
							4 **58**	3740 8240	4880 10750	3850 8480	**3580** **7890**	3410 7510	3250 7160	2960 6520
R 54							0.8 12	620 1370	810 1780	640 1410	590 1300	570 1260	540 1190	490 1080
							1.2 17	780 1720	1020 2250	810 1780	740 1630	710 1560	680 1500	620 1370
							1.6 23	930 2050	1220 2690	960 2110	890 1960	850 1870	810 1780	740 1630
							2.2 32	2430 5350	3170 6980	2500 5510	2310 5090	2220 4890	2110 4650	1920 4230
	270/95 R 54 (11.2 R 54)	146 D/ 149 A8	**W9** W8, W10	275 10.8	1886 74.3	892 35.1	5783 227.7	2.8 41	2790 6150	3650 8040	2880 6340	2660 5860	2550 5620	2430 5350	2210 4870
							3.2 46	3020 6650	3950 8700	3120 6870	2880 6340	2760 6080	2630 5790	2390 5260
							3.5 51	3190 7030	4160 9160	3280 7220	3030 6670	2910 6410	2770 6100	2520 5550
							4 **58**	3450 7600	4500 9910	3560 7840	**3290** **7250**	3150 6940	3000 6610	2730 6010

TRACTOR BIAS

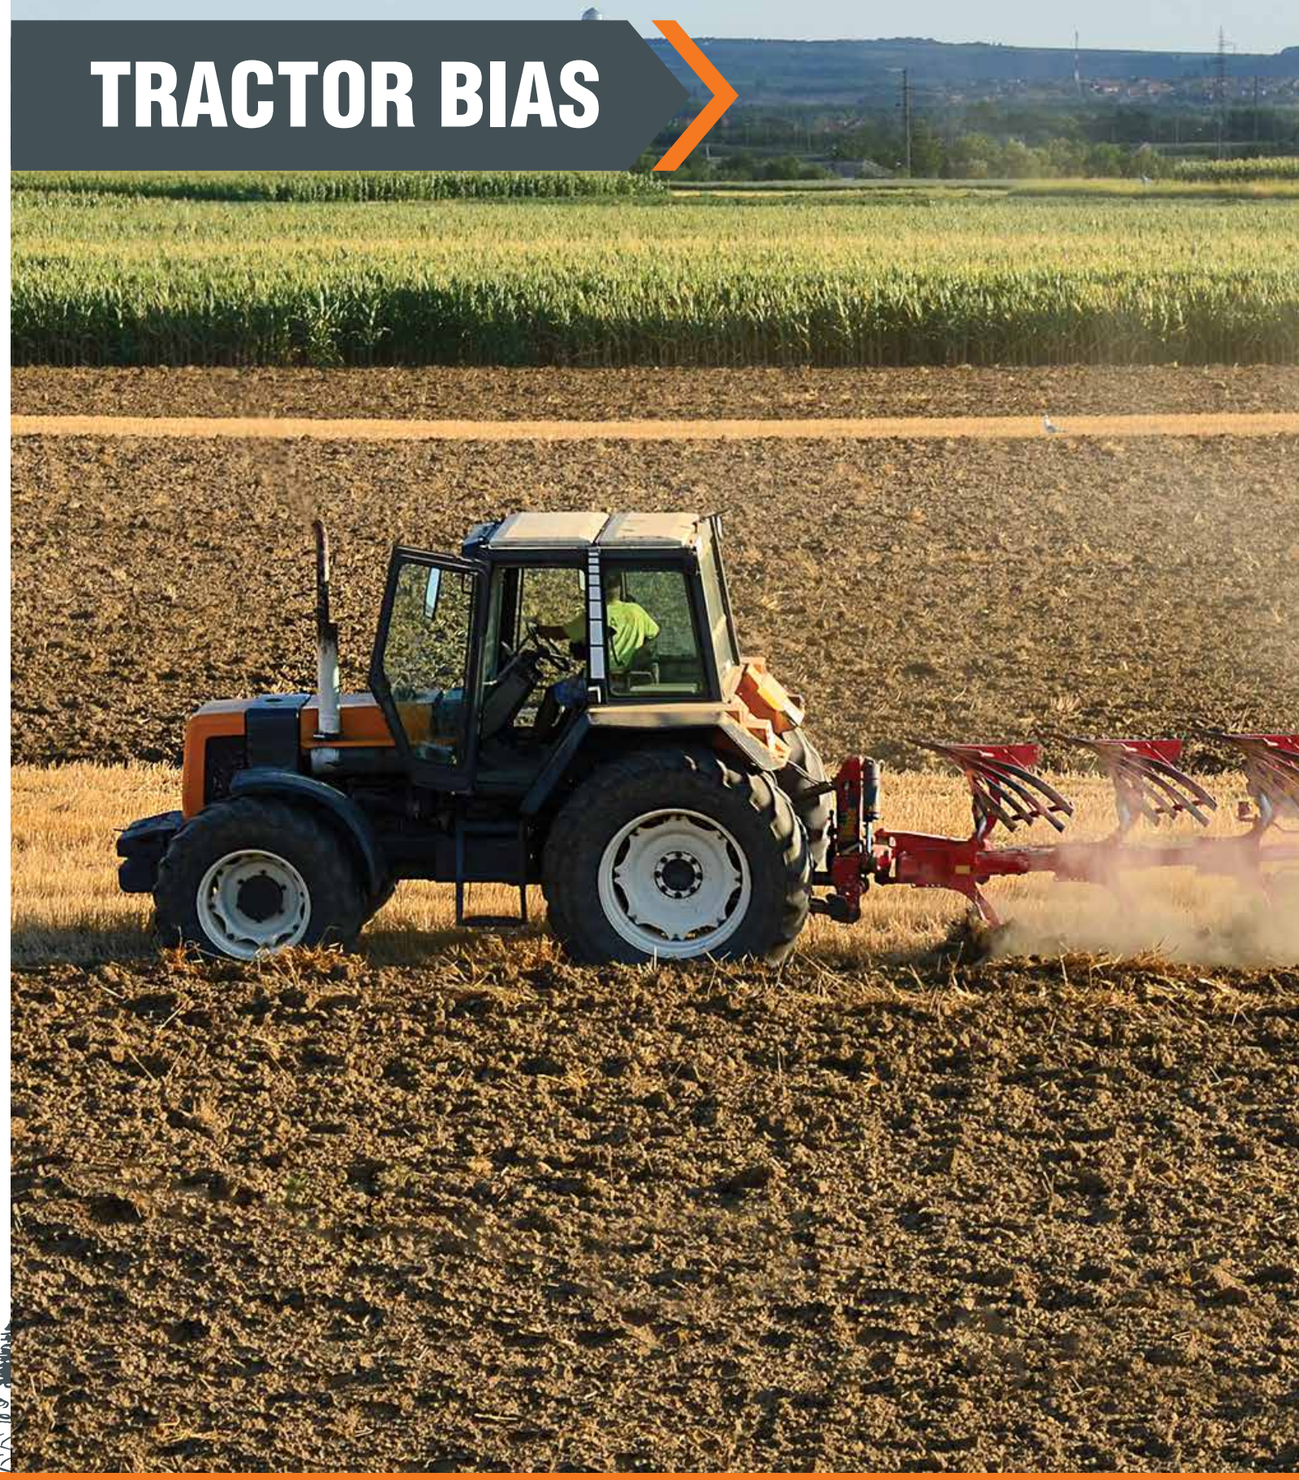

FEATURES

- 3 Rib front wheel design
- Strong nylon casing
- Solid centre rib

BENEFITS

- Easy steering
- Designed for two wheel drive tractors

FARMAX F2

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
5.00-15	4	TT	73 A6	4.00E	140 5.5	655 25.7	307 12.0	1965 77.3	2.8 41	30 19	365 805
5.50-16	6	TT	86 A6	4.00E	150 5.9	710 27.9	332 13.0	2130 83.8	3.7 54	30 19	530 1170
6.00-16	6	TT	88 A6	4.50E	165 6.9	735 28.9	344 13.5	2205 86.8	3.4 49	30 19	560 1235
6.50-16	6	TT	91 A6	4.50E	175 6.8	760 29.9	356 14.0	2280 89.7	3.1 45	30 19	615 1355
7.50-16	8	TT	103 A6	5.50F	205 8.0	805 31.6	377 14.8	2415 95.0	3.7 54	30 19	875 1930
10.00-16	8	TT	115 A6	W8	285 11.2	910 35.8	426 16.7	2730 107.4	2.8 41	30 19	1215 2680
11.00-16	8	TT	118 A6	W10	326 12.8	972 38.2	455 17.9	2916 114.8	2.5 36	30 19	1320 2910
7.50-18	8	TT	106 A6	5.50F	205 8.0	860 33.8	402 15.8	2580 101.5	3.7 54	30 19	950 2095
4.00-19	4	TT	72 A6	3.00D	112 4.4	712 28.0	333 13.1	2136 84.0	3.4 49	30 19	355 785
7.50-20	8	TT	108 A6	5.50F	205 8.0	914 35.9	428 16.8	2742 107.9	3.4 49	30 19	1030 2270

FARMAX F2M

FEATURE

- Multi rib design

BENEFIT

- Easy steering

FEATURE

- Cut-resistant compound

BENEFIT

- Improved tyre life

FARMAX F2M

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
9.5L-15 SL	8	TL	102 A8	7.0	241 9.5	782 30.8	352 13.9	2346 92.4	3.3 48	40 25	850 1875
11L-15 SL	8	TL	106 A8	8.0 LB	279 11.0	813 32.0	366 14.4	2439 96.0	3.0 44	40 25	950 2095
10.00-16 SL	8	TL	110 A8	W8L	274 10.8	894 35.2	402 15.8	2682 105.6	3.0 44	40 25	1060 2335
11.00-16 SL	8	TL	114 A8	W8L	315 12.4	967 38.1	435 17.1	2901 114.2	2.8 40	40 25	1180 2600

FEATURES

- 3 rib front wheel
- Strong nylon casing and high grade compounds

BENEFITS

- Easy steering
- Long lasting
- Quality performance

SAMRAAT F2

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
6.00-16	8	TT	94 A6	4.50E	165 7	735 29	344 14	2205 87	4.5 65	30 19	670 1475
7.50-16	8	TT	103 A6	5.50F	205 8	805 32	377 15	2415 95	3.7 54	30 19	875 1930
6.50-20	6	TT	97 A6	5.00F	175 7	865 34	405 16	2595 102	3.1 45	30 19	730 1610

FEATURES

- 3 rib design with solid centre rib
- High non-skid depth
- Stone ejectors
- Strong nylon casing
- Raised centre rib

BENEFITS

- Longer tyre life
- Improved puncture resistance
- Better steering

AAYUSHMAAN F2

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
6.00-16	8	TT	94 A6	4.5E	170 7	745 29	349 14	2235 88	4.4 64	30 19	670 1475
7.50-16	8	TT	103 A6	5.50F	210 8	818 32	383 15	2454 97	3.7 54	30 19	875 1930
6.50-20	8	TT	102 A6	5.00F	182 7	872 34	408 16	2616 103	4.5 65	30 19	850 1875

FARMAX R1

FEATURE
- Triple angle lug

BENEFIT
- Enhanced traction & roadability

FEATURE
- High centre lug overlap & tie bar

BENEFIT
- Improved stability

FEATURE
- Reinforced carcass

BENEFIT
- Longer service life

FARMAX R1

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
8.3-24	8	TT	105 A6	W7	209 8.2	994 39.1	465 18.3	2982 117.4	3.1 45	30 19	925 2039
9.5-24	8	TT	112 A6	W8	241 9.5	1050 41.3	491 19.3	3150 124.0	2.8 41	30 19	1120 2469
11.2-24	8	TT	116 A6	W10	282 11.1	1103 43.4	516 20.3	3309 130.3	2.4 35	30 19	1250 2756
11.2-24	10	TT	120 A8	W10	285 11.2	1103 43.4	516 20.3	3309 130.3	3 44	28 35	1400 3086
12.4-24	8	TT	121 A6	W11	307 12.1	1159 45.6	542 21.4	3477 136.9	2.3 33	30 19	1415 3120
13.6-24	8	TT	122 A6	W12	345 13.6	1210 47.6	560 22.0	3555 140.0	1.9 28	30 19	1500 3300
14.9-24	8	TT	128 A6	W13	402 15.8	1275 50.2	597 23.5	3825 150.6	1.8 26	30 19	1800 3968
16.9-24	8	TT	133 A6	W15L	426 16.8	1330 52.4	622 24.5	3990 157.1	1.7 25	30 19	2040 4497
18.4-26	12	TT	146 A6	W16L	492 19.4	1480 58.3	693 27.3	4440 174.8	2.3 33	30 19	3000 6614
11.2-28	8	TT	118 A6	W10	295 11.6	1205 47.4	564 22.2	3615 142.3	2.5 36	30 19	1320 2910
12.4-28	8	TT	123 A6	W11	323 12.7	1258 49.5	589 23.2	3774 148.6	2.4 35	30 19	1550 3417
13.6-28	8	TT	125 A6	W12	343 13.5	1310 51.6	613 24.1	3930 154.7	2 29	30 19	1650 3638
13.6-28	12	TT	134 A8	W12	343 13.5	1310 51.6	613 24.1	3930 154.7	3 44	134 A8	2120 4674
14.9-28	8	TT	130 A6	W13	386 15.2	1375 54.1	644 25.3	4125 162.4	1.8 26	30 19	2070 4564
16.9-28	12	TT	143 A6	W15L	429 16.9	1435 56.5	672 26.4	4305 169.5	2.4 35	30 19	2725 6008
16.9-30	10	TT	140 A6	W15L	440 17.3	1495 58.9	700 27.5	4485 176.6	2 29	30 19	2455 5412
18.4-30	12	TT	149 A6	W16L	465 18.3	1564 61.6	732 28.8	4692 184.7	2.3 33	30 19	3250 7165
18.4-34	8	TT	142 A6	W16L	465 18.3	1650 65.0	772 30.4	4950 194.9	1.4 20	30 19	2650 5842
	12	TT	150 A6						2.3 33	30 19	3450 7606
13.6-36	8	TT	129 A6	W12	350 13.8	1535 60.4	718 28.3	4605 181.3	2 29	30 19	1855 4090
13.6-38	8	TT	131 A6	W12	350 13.8	1585 62.4	742 29.2	4755 187.2	2 29	30 19	1950 4299
15.5-38	8	TT	133 A6	W14	400 15.7	1577 62.1	738 29.1	4731 186.3	1.8 26	30 19	2060 4542
	10	TT	137 A6						2.3 33	30 19	2300 5071
16.9-38	8	TT	141 A6	W15L	429 16.9	1685 66.3	789 31.0	5055 199.0	1.7 25	30 19	2575 5677
	10	TT	143 A6						2.0 29	30 19	2725 6008
18.4-38	8	TT	143 A6	W16L	465 18.3	1750 68.9	819 32.2	5250 206.7	1.4 20	30 19	2725 6008
	12	TT	152 A6						2.3 33	30 19	3550 7826

FEATURES

- Strong Lug
- Specially designed deep lugs
- Strong nylon casing

BENEFITS

- Heavy duty service
- High traction
- Self-cleaning properties
- Long service life under severe service conditions
- Excellent stability

SAMRAAT PLUS R1

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
16.9-28	12	TT	143 A6	W15L	429 17	1435 57	672 26	4305 170	2.4 35	30 19	2725 6010

FEATURES

- Extra strong
- Deep lugs
- Dual angle design
- More surface contact area
- Strong nylon casing

BENEFITS

- Heavy duty service
- High traction
- Self-cleaning properties
- Long service life under severe service conditions
- Excellent stability

SAMRAAT SUPER R1

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
9.5-24	8	TT	112 A6	W8	241 10	1055 42	494 19	3165 125	2.8 41	31 39	31 69
12.4-24	8	TT	121 A6	W11 W10	315 12	1160 46	543 21	3480 137	2.3 33	31 39	39 86
12.4-28	12	TT	125 A6	W11 W10	315 12	1260 50	590 23	3780 149	2.5 36	37 47	52 114
13.6-28	12	TT	128 A6	W12	356 14	1310 52	613 24	3930 155	2.3 33	38 48	62 137
14.9-28	12	TT	134 A6	W13 W12	378 15	1365 54	639 25	4095 161	2.3 33	37 47	73 161

FEATURES

- Cut resistant tread compound
- Higher non-skid depth
- Dual angle lugs
- High overlap at centre
- Strong nylon casing

BENEFITS

- High traction for better tillage on eld
- Self-cleaning
- Excellent for haulage on road performance
- Longer tyre life

AAYUSHMAAN R1

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
8.00-18	4	TT		W7	203 8	830 33				A6	520
11.2-24	8	TT	116 A6	W10	292 12	1115 44	522 21	3345 132	2.4 35	30 19	1250 2755
12.4-28	12	TT	125 A6	W11	325 13	1276 50	597 24	3828 151	2.5 36	30 19	1650 3640
13.6-28	12	TT	128 A6	W12	356 14	1320 52	618 24	3960 156	2.3 33	30 19	1800 3970
14.9-28	12	TT	134 A6	W13	386 15	1380 54	646 25	4140 163	2.3 33	30 19	2120 4675
16.9-28	12	TT	143 A6	W15L	442 17	1450 57	679 27	4350 171	2.4 35	30 19	2725 6010
15.5-38	10	TT	138 A6	W14L	395 16	1580 62	728 29	4725 186	2.2 32	30 19	2360 5200
	12		141 A6						2.8 41	30 19	2575 5675
	14		144 A6						3.1 55	30 19	2800 6175

FEATURES

- Extra deep tread
- Deep lugs
- Strong nylon casing

BENEFITS

- Superior grip in muddy conditions
- Reduced slippage
- Good stability
- Enhanced puncture resistance

AAYUSHMAAN R2

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
12.4-28	12	TT	125 A6	W11	325 13	1293 51	596 24	3815 150	2.5 36	30 19	1650 3640

FEATURES

- Cut resistant tread compound
- Higher non-skid depth
- Dual angle lugs
- High overlap at centre
- Strong nylon casing

BENEFITS

- High traction for better tillage on eld
- Self-cleaning
- Excellent for haulage on road performance
- Longer tyre life

AAYUSHMAAN HD

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
18.4-30	14	TT		W16L	488	1575				A6	3450

HARVESTER

YIELDMAX

FEATURE
• R-1W tread

BENEFIT
• Longer tyre life

FEATURE
• Dual lug angle

BENEFIT
• Higher traction and better stability

FEATURE
• Higher lug overlap

BENEFIT
• Enhanced roadability and loadability

FEATURE
• Strong and sharp shoulders

BENEFIT
• Better grip and lower compaction

FEATURE
• Tough casing & Rigid belt

BENEFIT
• Enhanced Load Bearing Capacity

FEATURES
• Rounded lug base

BENEFIT
• Stubble resistant

Size	LI/SS	Rim	Unloaded Dimensions SW mm in	Unloaded Dimensions OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Recommended load, kg (lbs) Speed kmph (mph) Non-Cyclic Operations Static	10	20	30	40	50	Speed kmph mph Cyclic Operations 10	15
									6	12	19	25	31	6	9
									Constand load			kg lbs		Recom. Load	kg lbs
R 26															
620/75 R26	166 A8/B	**DW20B,** DW20L	625 24.6	1610 63.4	775 30.5	4856 191.2	1.8 26	8720 19210	5690 12530	4660 10260	4060 8940	3790 8350	3790 8350	6820 15020	6250 13770
							2.2 32	9800 21590	6390 14070	5240 11540	4560 10040	4260 9380	4260 9380	7670 16890	7030 15480
							2.4 35	10300 22690	6720 14800	5510 12140	4790 10550	4480 9870	4480 9870	8060 17750	7390 16280
							2.8 41	11270 24820	7350 16190	6030 13280	5240 11540	4900 10790	4900 10790	8820 19430	8090 17820
							3 44	11730 25840	7650 16850	6270 13810	5460 12030	**5100 11230**	5100 11230	9180 20220	8420 18550
							3.2 46	12190 26850	7950 17510	6520 14360	5670 12490	**5300 11670**	5300 11670	9540 21010	8750 19270
R 32															
650/75 R32	172 A8/B	**DW21B,** DW20L	625 24.6	1810 71.3	493 19.4	5459 214.9	1.8 26	10370 22840	6770 14910	5550 12220	4830 10640	4510 9930	4510 9930	8120 17890	7440 16390
							2.2 32	11660 25680	7610 16760	6240 13740	5420 11940	5070 11170	5070 11170	9130 20110	8370 18440
							2.4 35	12260 27000	8000 17620	6560 14450	5700 12560	5330 11740	5330 11740	9590 21120	8790 19360
							2.8 41	13410 29540	8750 19270	7170 15790	6240 13740	5830 12840	5830 12840	10490 23110	9620 21190
							3.0 44	13960 30750	9110 20070	7470 16450	6490 14300	**6070 13370**	6070 13370	10930 24070	10020 22070
							3.2 46	14490 31920	9450 20810	7750 17070	6740 14850	**6300 13880**	6300 13880	11340 24980	10400 22910

BIAS

FEATURES

- Wide lugs
- Strong nylon casing
- Stubble resistant tread compound

BENEFITS

- High traction
- Self-cleaning
- Better grip on and off-road
- Resistance to stub penetration

SAMRAAT SUPER XL

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
18.4-30	14	TT	151 A6	W16L	467 18	1550 61	725 29	4650 183	2.6 38	30 19	3450 7605

BIAS

FEATURES

- Dual angle wide lugs
- Strong nylon casing
- Wear and cut resistant tread compound

BENEFITS

- High traction
- Self-cleaning
- Better grip on and off-road

AAYUSHMAAN

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
16.9-30	12	TT	144 A6	W15L	435 17	1500 59	673 26	4415 174	2.4 35	30 19	2800 6175
	14		146 A6						2.8 41	30 19	3000 6615
18.4-30	14	TT	151 A6	W16L	488 19	1575 62	737 29	4725 186	2.6 38	30 19	3450 7605
*18.4-30	14	TT	151 A6	16	488 19	1575 62	737 29	4725 186	2.6 38	30 19	3450 7605

* AAYUSHMAAN HD

FLOTATION

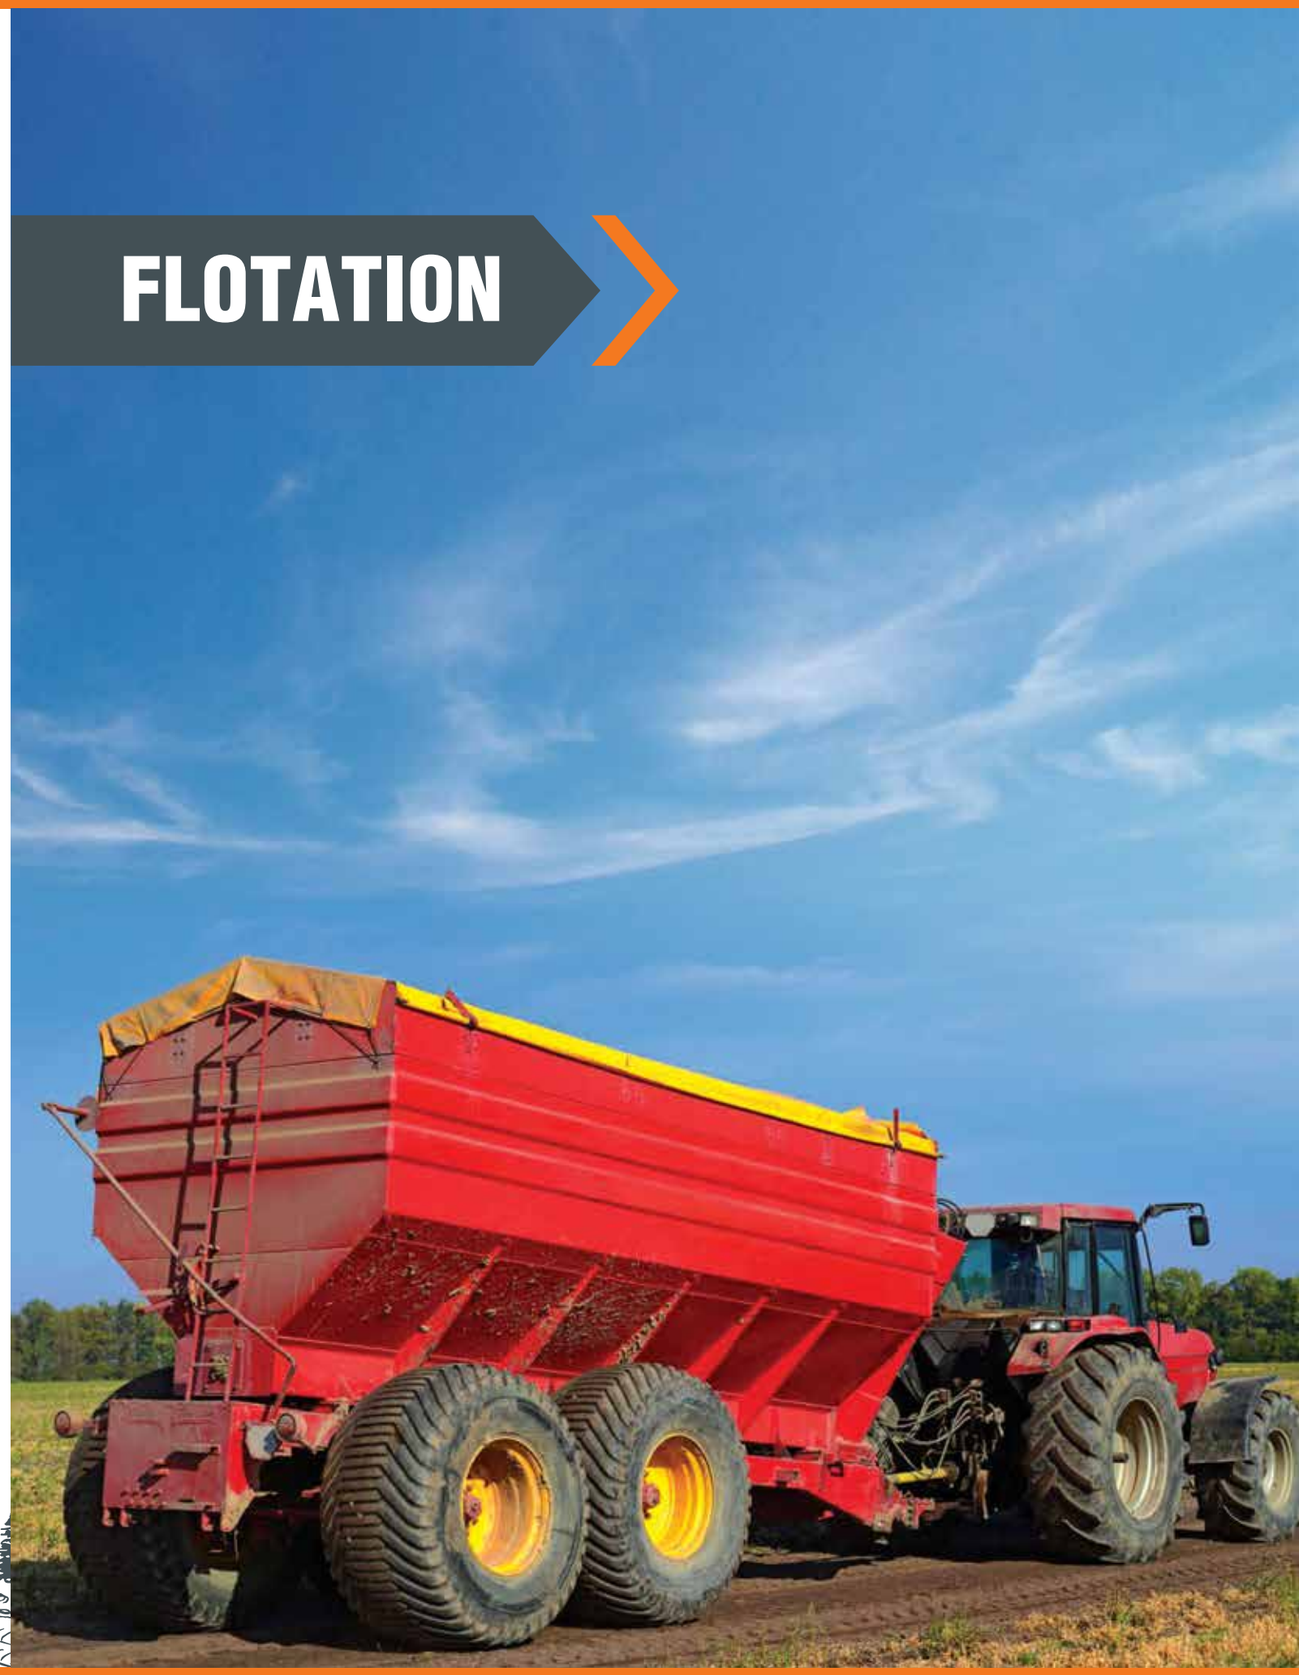

FLOATMAX FT AGRI RADIAL

WITH THE POWER OF CTR*

FEATURE
- Directional lug

BENEFIT
- Superior traction

FEATURE
- Robust centre blocks

BENEFIT
- Better stability & roadability

FEATURE
- Higher rubber mass

BENEFIT
- Longer life

FEATURE
- Rounded shoulder

BENEFIT
- Lesser damage to soil & crop

FEATURE
- Wider & flatter crown

BENEFIT
- Better floating characteristics

*CTR-Low Compaction, High Traction, High Roadability

Size	LI/SS	Rim	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	SLR mm in	RC mm in	Infl. Press. bar psi	Speed kmph mph: Static	10 6	30 19	40 25	50 31	65 40
								Recommended Load kg lbs					
FLOATMAX FT													
R 22.5													
500/60 R 22.5	155 D	AG16.00	503 19.8	1172 46.1	530 20.9	3571 140.6	1.2 17	4390 9670	3440 7580	2880 6340	2600 5730	2310 5090	1910 4210
							1.6 23	5200 11450	4070 8960	3410 7510	3070 6760	2730 6010	2260 4980
							2.4 35	6600 14540	5170 11390	4330 9540	3900 8590	3470 7640	2870 6320
							2.8 41	7220 15900	5650 12440	4740 10440	4270 9410	3800 8370	3140 6920
							3.6 52	8370 18440	6550 14430	5500 12110	4950 10900	4400 9690	3640 8020
							4 **58**	8910 19630	6980 15370	5850 12890	5270 11610	4690 10330	**3875** **8540**
560/45 R 22.5	152 D	AG16.00	543 21.4	1076 42.4	493 19.4	3279 129.1	1.2 17	4030 8880	3150 6940	2640 5810	2380 5240	2120 4670	1750 3850
							1.6 23	4760 10480	3730 8220	3130 6890	2820 6210	2500 5510	2070 4560
							2.4 35	6050 13330	4730 10420	3970 8740	3580 7890	3180 7000	2630 5790
							2.8 41	6620 14580	5180 11410	4350 9580	3920 8630	3480 7670	2880 6340
							3.6 52	7680 16920	6010 13240	5040 11100	4540 10000	4040 8900	3340 7360
							4 **58**	8170 18000	6390 14070	5360 11810	4830 10640	4300 9470	**3550** **7820**
560/60 R 22.5	161 D	AG16.00	543 21.4	1244 49	561 22.1	3810 150	1.2 17	5270 11610	4120 9070	3460 7620	3110 6850	2770 6100	2290 5040
							1.6 23	6230 13720	4880 10750	4090 9010	3690 8130	3280 7220	2710 5970
							2.4 35	7910 17420	6190 13630	5190 11430	4680 1030	4160 9160	3440 7580
							2.8 41	8650 19050	6770 14910	5680 12510	5110 11260	4550 10020	3760 8280
							3.6 52	10010 22050	7830 17250	6570 14470	5920 13040	5260 11590	4350 9580
							4 **58**	10640 23440	8330 18350	6980 15370	6290 13850	5600 12330	**4625** **10190**
600/50 R 22.5	159 D	AG20.00	611 24.1	1172 46.1	532 20.9	3479 137	1.2 17	4970 10950	3890 8570	3260 7180	2940 6480	2610 5750	2160 4760
							1.6 23	5890 12970	4610 10150	3870 8520	3480 7670	3100 6830	2560 5640
							2.4 35	7450 16410	5830 12840	4890 10770	4410 9710	3920 8630	3240 7140
							2.8 41	8170 18000	6390 14070	5360 11810	4830 10640	4300 9470	3550 7820
							3.6 52	9450 20810	7400 16300	6210 13680	5590 12310	4970 10590	4110 9050
							4 **58**	10060 22160	7880 17360	6610 14560	5950 13110	5290 11650	**4375** **9640**
R 26.5													
600/55 R 26.5	165 D	AG20.00	620 24.4	1336 52.6	608 24	4050 159.5	1.2 17	5840 12860	4570 10070	3840 8460	3450 7600	3070 6760	2540 5590
							1.6 23	6920 15240	5420 11940	4550 10020	4090 9010	3640 8020	3010 6630
							2.4 35	8790 19360	6880 15150	5770 12710	5200 11450	4620 10180	3820 8410
							2.8 41	9610 21170	7520 16560	6310 13900	5680 12510	5060 11150	4180 9210
							3.6 52	11130 24520	8710 19190	7310 16100	6580 14490	5860 12910	4840 10660
							4 **58**	11850 26100	9270 20420	7780 17140	7000 15420	6230 13720	**5150** **11340**

BIAS

FLOTATION T422

FEATURES
- Tough nylon casing
- Strong bead bundle

BENEFIT
- High load carrying capability

FEATURE
- Rounded shoulder

BENEFIT
- Reduced damage to crops

FEATURE
- Larger volume & footprint

BENEFIT
- Reduced compaction

FLOTATION T422

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			Free Rolling	Drive Wheel								Free Rolling	Drive Wheel
						mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs	kg lbs
500/50-17	16	TL	152/149 A8/B	140 / 136 A8/B	16.00DC	503 20	932 37	436 17	2796 110	3.2 46	40 25	3550 7820	2500 5510
	18	TL	157/154 A8/B	145/141 A8/B						4 58	40 25	4125 9095	2900 6395
550/45-22.5	12	TL	157 A8 154 B	141 A8 137 B	16.00DC	550 22	1070 42	470 19	3205 126	2.1 30	40 25	3650 8045	2575 5675
	16	TL	159 A8 156 B	147 A8 143 B						2.8 41	40 25	4375 9645	3075 6780
	20	TL	166 A8 162 B	154 A8 150 B						4 58	40 25	5300 11685	3750 8265
500/60-22.5	12	TL	157 A8 154 B	145 A8 142 B	16.00DC	500 20	1170 46	510 20	3490 137	2.4 35	40 25	4125 9095	2900 6395
	16	TL	163 A8 159 B	151 A8 148 B						3.2 46	40 25	4875 10750	3450 7605
550/60-22.5	12	TL	160 A8 156 B	148 A8 144 B	16.00DC	550 22	1240 49	540 21	3725 147	2.3 33	40 25	4500 9920	3150 6945
	16	TL	168 A8 163 B	155 A8 151 B						3 44	40 25	5600 12345	3875 8540
600/50-22.5	12	TL	159 A8 156 B	147 A8 144 B	20.00DC	600 24	1170 46	510 20	3498 138	2 29	40 25	4375 9645	3075 6780
	16	TL	165 A8 161 B	153 A8 149 B						2.6 38	40 25	5150 11355	3650 8045
600/55-22.5	12	TL	164 A8 160 B	151 A8 148 B	20.00DC	600 24	1238 49	540 21	3715 146	2 29	40 25	5000 11025	3450 7605
	16	TL	169 A8 166 B	156 A8 153 B						2.6 38	40 25	5800 12785	4000 8815
600/55-26.5	12	TL	165 A8 161 B	153 A8 149 B	20.00DC	600 24	1333 53	585 23	3986 157	2 29	40 25	5150 11355	3640 8045
	16	TL	170 A8 167 B	159 A8 156 B						2.6 38	40 25	6000 13230	4375 9645
700/40-22.5	12	TL	160 A8 157 B	148 A8 144 B	24.00DC	700 28	1170 46	510 20	3535 139	2 29	40 25	4500 9920	3150 6945
	16	TL	166 A8 162 B	154 A8 150 B						2.2 32	40 25	5300 11685	3750 8265
700/50-22.5	12	TL	168 A8 164 B	156 A8 153 B	24.00DC	700 28	1245 49	550 22	3710 146	2.2 32	40 25	5600 12345	4000 8815
	16	TL	174 A8 170 B	162 A8 158 B						2.8 41	40 25	6700 14770	4750 10470
700/50-26.5	12	TL	169 A8 165 B	157 A8 154 B	24.00DC	700 28	1333 53	585 23	3986 157	1.8 26	40 25	5800 12785	4125 9095
	16	TL	174 A8 170 B	162 A8 158 B						2.4 35	40 25	6700 14770	4750 10470
800/45-26.5	12	TL	170 A8 167 B	158 A8 155 B	16.00DC	800 32	1343 53	585 23	4016 158	1.7 25	40 25	6000 13230	4250 9370
	16	TL	177 A8 173 B	164 A8 160 B						2.2 32	40 25	7300 16095	5000 11025

T422 VALUE PRO

FEATURE
- Rounded shoulder

BENEFIT
- Reduced damage to crops

FEATURE
- Larger volume & footprint

BENEFIT
- Reduced compaction

T422 VALUE PRO

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			Free Rolling	Drive Wheel								Free Rolling	Drive Wheel
						mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs	kg lbs
400/60-15.5	16	TL	148 A8	136 B	13.00DC	400 15.7	876 34.5	385 15.2	2575 101.4	4.4 64		3150 6945	2240 4938
400/55-22.5	16	TL	152 A8 149 B	140 A8 136 B	13.00DC	400 15.7	1012 39.8	445 17.5	3135 123.4	4 58	40 25	3550 7825	2500 5510
500/45-22.5	16	TL	154 A8 150 B	142 A8 138 B	16.00DC	500 20	1045 41	470 10	3165 125	3.6 52	40 25	3750 8265	2650 5840
500/60-22.5	16	TL	163 A8 159 B	151 A8 148 B	16.00DC	500 20	1170 46	510 20	3490 137	3.2 46	40 25	4875 10750	3450 7605
550/45-22.5	16	TL	159 A8 156 B	147 A8 143 B	16.00DC	550 22	1070 42	470 19	3205 126	2.8 41	40 25	4375 9645	3075 6780
550/60-22.5	16	TL	168 A8 163 B	155 A8 151 B	16.00DC	550 21.7	1240 49	540 21	3725 147	3 44	40 25	5600 12345	3875 8540

*Designed for free-rolling applications

TR800

FEATURE
- Rounded shoulder

BENEFIT
- Reduced damage to crops

FEATURE
- Larger volume & footprint

BENEFIT
- Reduced compaction

TR800

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			Free Rolling	Drive Wheel								Free Rolling	Drive Wheel
						mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs	kg lbs
400/60-15.5	14	TL	145 A8	132 A8	13.00	400 15.7	876 34.5	385 15.2	2575 101.4	3.6 52 4.5 65	40 25 40 25	2900 6395 3250 7165	2000 4410 2300 5070
	18	TL	149 A8	137 A8									

FLOTATION PLUS

FEATURE
- Rounded shoulder

BENEFIT
- Reduced damage to crops

FEATURE
- Larger volume & footprint

BENEFIT
- Reduced compaction

*Designed for steering & drive wheel applications

FLOTATION PLUS

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			Free Rolling	Drive Wheel								Free Rolling	Drive Wheel
						mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs	kg lbs
480/45-17	16	TL	146 A8	134 A8	16.00DC	490 19.3	866 34.1	405 16.0	2598 102.3	3.2 46	40 25	3000 6615	2120 4675
500/50-17	14	TL	149 A8	137 A8	16.00DC	500 19.7	950 37.4	445 17.5	2850 112.2	2.8 41	40 25	3250 7165	2240 4940

FLOTATION TX440

FEATURE
• Rounded shoulder

BENEFIT
• Reduced damage to crops

FEATURE
• Larger volume & footprint

BENEFIT
• Reduced compaction

*Designed for on & off-road agricultural service

FLOTATION TX440

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			Free Rolling	Drive Wheel								Free Rolling	Drive Wheel
						mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs	kg lbs
500/60-22.5	16	TL	163 A8 159 B	151 A8 148 B	16.00DC	500 20	1170 46	510 20	3490 137	3.2 46	40 25	4875 10750	3450 7605
550/60-22.5	16	TL	166 A8 162 B	154 A8 150 B	16.00DC	550 22	1244 49	540 21	3725 147	2.8 41	40 25	5300 11685	3750 8265
600/50-22.5	16	TL	165 A8 161 B	153 A8 149 B	20.00DC	600 24	1170 46	510 20	3498 138	2.6 38	40 25	5150 11355	3650 8045
700/40-22.5	16	TL	166 A8 162 B	154 A8 150 B	24.00DC	700 28	1170 46	512 20	3535 139	2.2 32	40 25	5300 11685	3750 8265

IMPLEMENT

FEATURES

- Multi rib low section design
- Extra wide tread and high volume

BENEFITS

- High load carrying capacity
- Designed for both on and off-road application

FARM IMPLEMENT I1

Size	PR	Type	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
				SW	OD				Static	Max Speed	Max Load
				mm in	mm in	mm in	mm in	bar psi	kg lbs	kmph mph	kg lbs
7.60-15 SL	10	TL	5.5	194 7.6	732 28.8	326 12.8	2145 84.4	4.3 62	2100 4630	50 31	1050 2315
9.5L-15 SL	8	TT	7.0	241 9.5	767 30.2	341 13.4	2247 88.5	3 44	2240 4940	50 31	1120 2470
		TL									
	12	TT						4.4 64	2900 6395	50 31	1450 3200
		TL									
11L-15 SL	8	TT	8 LB	279 11.0	777 30.6	345 13.6	2331 91.8	2.5 36	2300 5070	50 31	1150 2540
		TL									
	10	TT						3 44	2640 5820	50 31	1320 2910
		TL									
	12	TT						3.6 52	2900 6390	50 31	1450 3200
		TL									
12.5L-15 SL	10	TT	10 LB	318 12.5	823 32.4	363 14.3	2411 94.9	3 44	3100 6835	50 31	1550 3420
		TL									
	12	TL	10 LB					3.6 52	3500 7715	50 31	1750 3860

FEATURES

- Non directional tread pattern
- Lugs are open and angled at the shoulder
- Larger footprint

BENEFITS

- Prevents skidding while turning
- Ensures maximum stability
- Designed for agricultural use

FARM IMPLEMENT AWI305

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load capacity	
					SW	OD				Max Speed	Max load
			Free Rolling		mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
10.0/75-15.3	12	TL	126 A8	9.0	264 10.4	770 30.3	347 13.7	2272 89.4	4.7 68	40 25	1700 3750
11.5/80-15.3	14	TL	139 A8	9.0	297 11.7	855 33.7	376 14.8	2485 97.8	4.75 69	40 25	2430 5355
12.5/80-15.3	12	TL	140/144, A8/A6	9.0	305 12.0	900 35.4	414 16.3	2700 106.3	3.6 52		2500, 2800 5510, 6175

FEATURES

- Multi rib low section design
- Extra wide tread and high volume
- Non directional tread pattern
- Lugs are open and angled at the shoulder
- Large contact area

BENEFITS

- High flotation with minimum soil compaction
- High load carrying capacity
- Prevents skidding while turning
- Ensures maximum stability
- Designed for both on and off-road application

FARM IMPLEMENT 404

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load capacity	
					SW	OD				Max Speed	Max load
			Free Rolling		mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
15/55-17	14	TL	141 A8	13.00	391 15.4	850 33.5	375 14.8	2492 98.1	3.7 54	40 25	2575 5675
500/50-17	18	TL	154 A8	16.00DC	500 19.7	945 37.2	415 16.3	2752 108.3	3.6 52	40 25	3750 8265

IRROGATOR

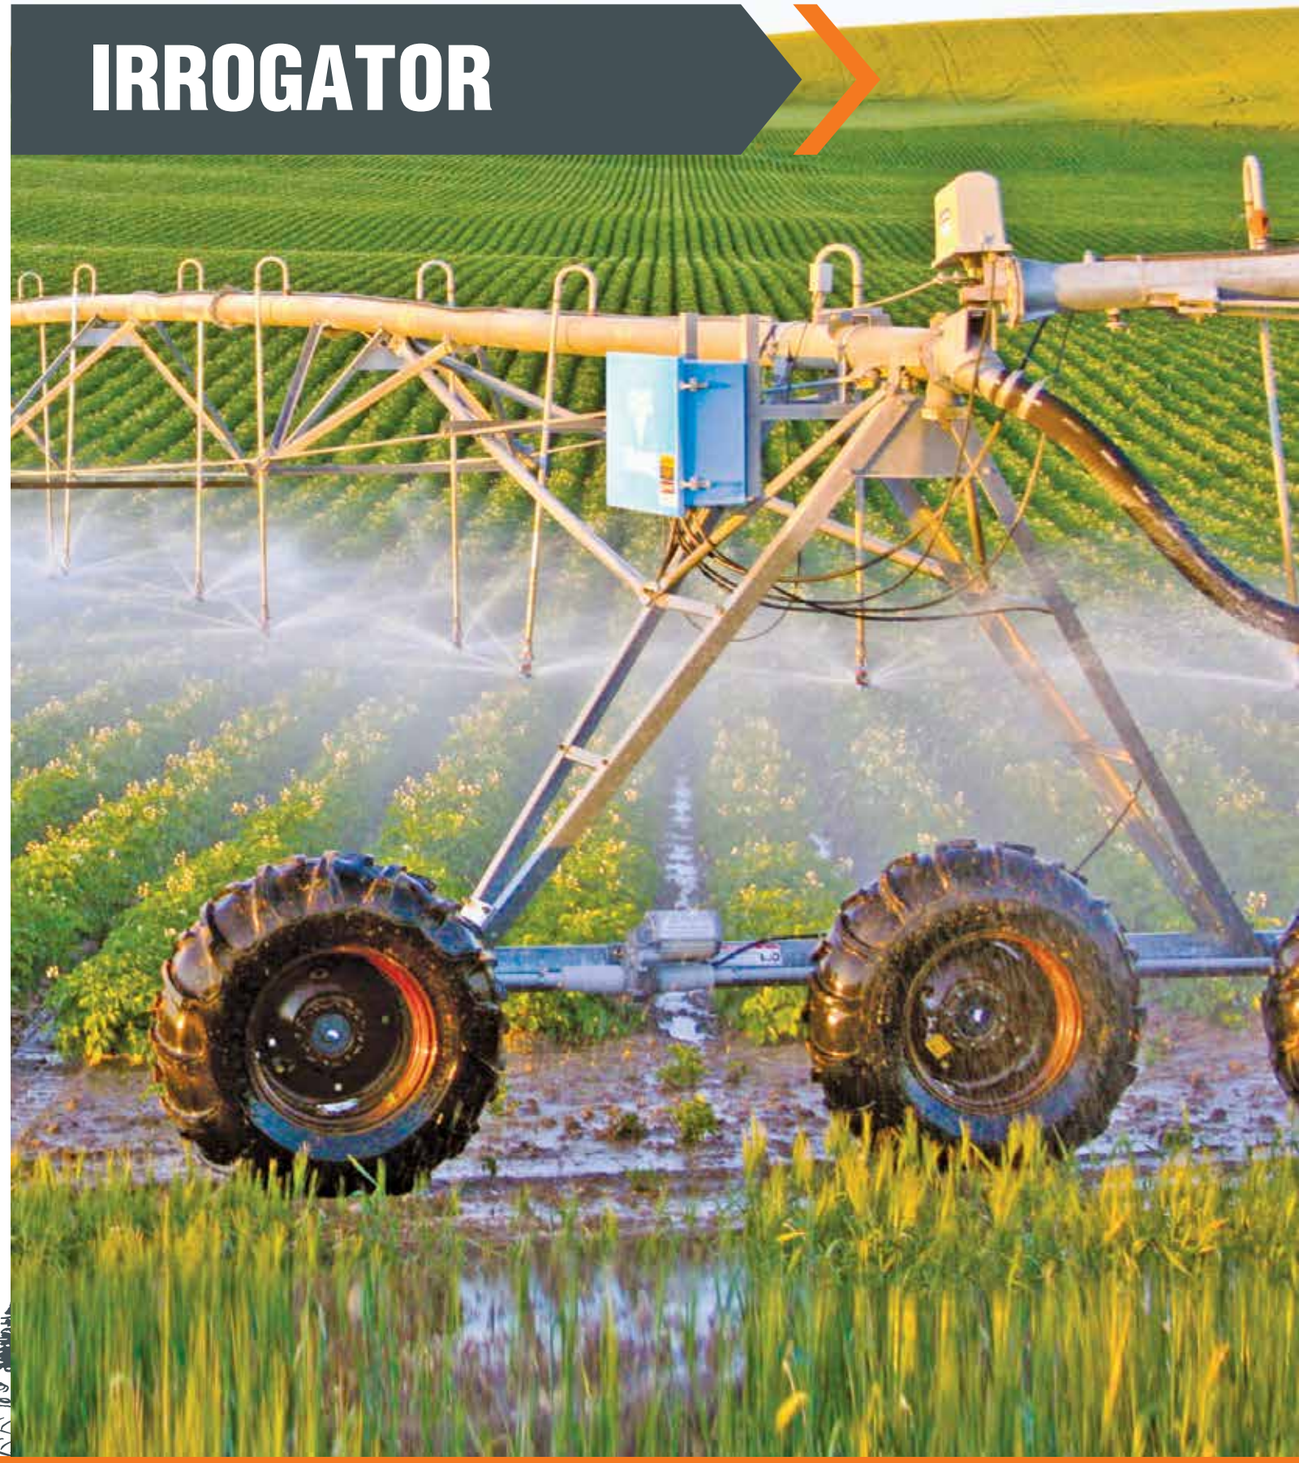

IRROGATOR

FEATURE
- Strong nylon casing

BENEFIT
- Excellent stability & increased service life

FEATURE
- Optimised lug angle with lug overlap

BENEFIT
- Uniform wear

IRROGATOR

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
*11.2-24	4	TT	110 A6	W10	284 11.2	1105 43.5	517 20.4	3315 130.5	1.8 26	30 19	1060 2335
14.9-24	8	TT	123 A6	W13	398 15.7	1245 49.0	575 22.6	3660 144.1	1.4 20	30 19	1550 3410
11.2-38	6	TT	117 A6	W10	284 11.2	1445 56.9	685 27.0	4250 167.3	1.8 26	30 19	1285 2830

*This is a separate pattern from the one shown

AGRO INDUSTRIAL / MULTI-USE

LIFT PRO

FEATURE
• Unique R1 pattern

BENEFIT
• excellent traction

FEATURE
• Deep under tread

BENEFIT
• Improved puncture resistance

FEATURE
• Strong nylon casing & thick sidewall

BENEFIT
• High radial & lateral stability

LIFT PRO

Size	LI/SS	Rim	Unloaded Dimensions SW	Unloaded Dimensions OD	SLR	RC	NSD	Tyre Wt.	Infl. Press.	Recommended load, kg (lbs) Speed kmph (mph) Non-Cyclic Operations Static	10	20	30	40	50	Speed kmph mph Cyclic Operations 10	15
											6	12	19	25	31	6	9
			mm in	mm in	mm in	mm in	mm 32 nds	kg lbs	bar psi		Constand load			kg lbs		Recom. Load	kg lbs
460/70 R 24	159 A8/B	**W15L** W16L	455 17.9	1254 49.4	566 22.3	3713 146	33 42	96 212	2.4 35	7430 16370	4040 8900	3520 7750	3360 7400	3230 7110	3230 46835	4850 10680	4330 9540
									2.8 41	8140 17930	4430 9760	3860 8500	3680 8110	3540 7800	3540 51330	5310 11700	4740 10440
									3.0 44	8490 18700	4610 10150	4020 8850	3840 8460	3690 8130	3690 53505	5540 12200	4940 10880
									3.6 52	9450 20810	5140 11320	4480 9870	4270 9410	4110 9050	4110 59595	6170 13590	5510 12140
									4 58	10060 22160	5470 12050	4770 10510	4550 10020	**4375 9640**	4375 63437.5	6560 14450	5860 12910

* Designed for tele-handlers for agro-industrial use

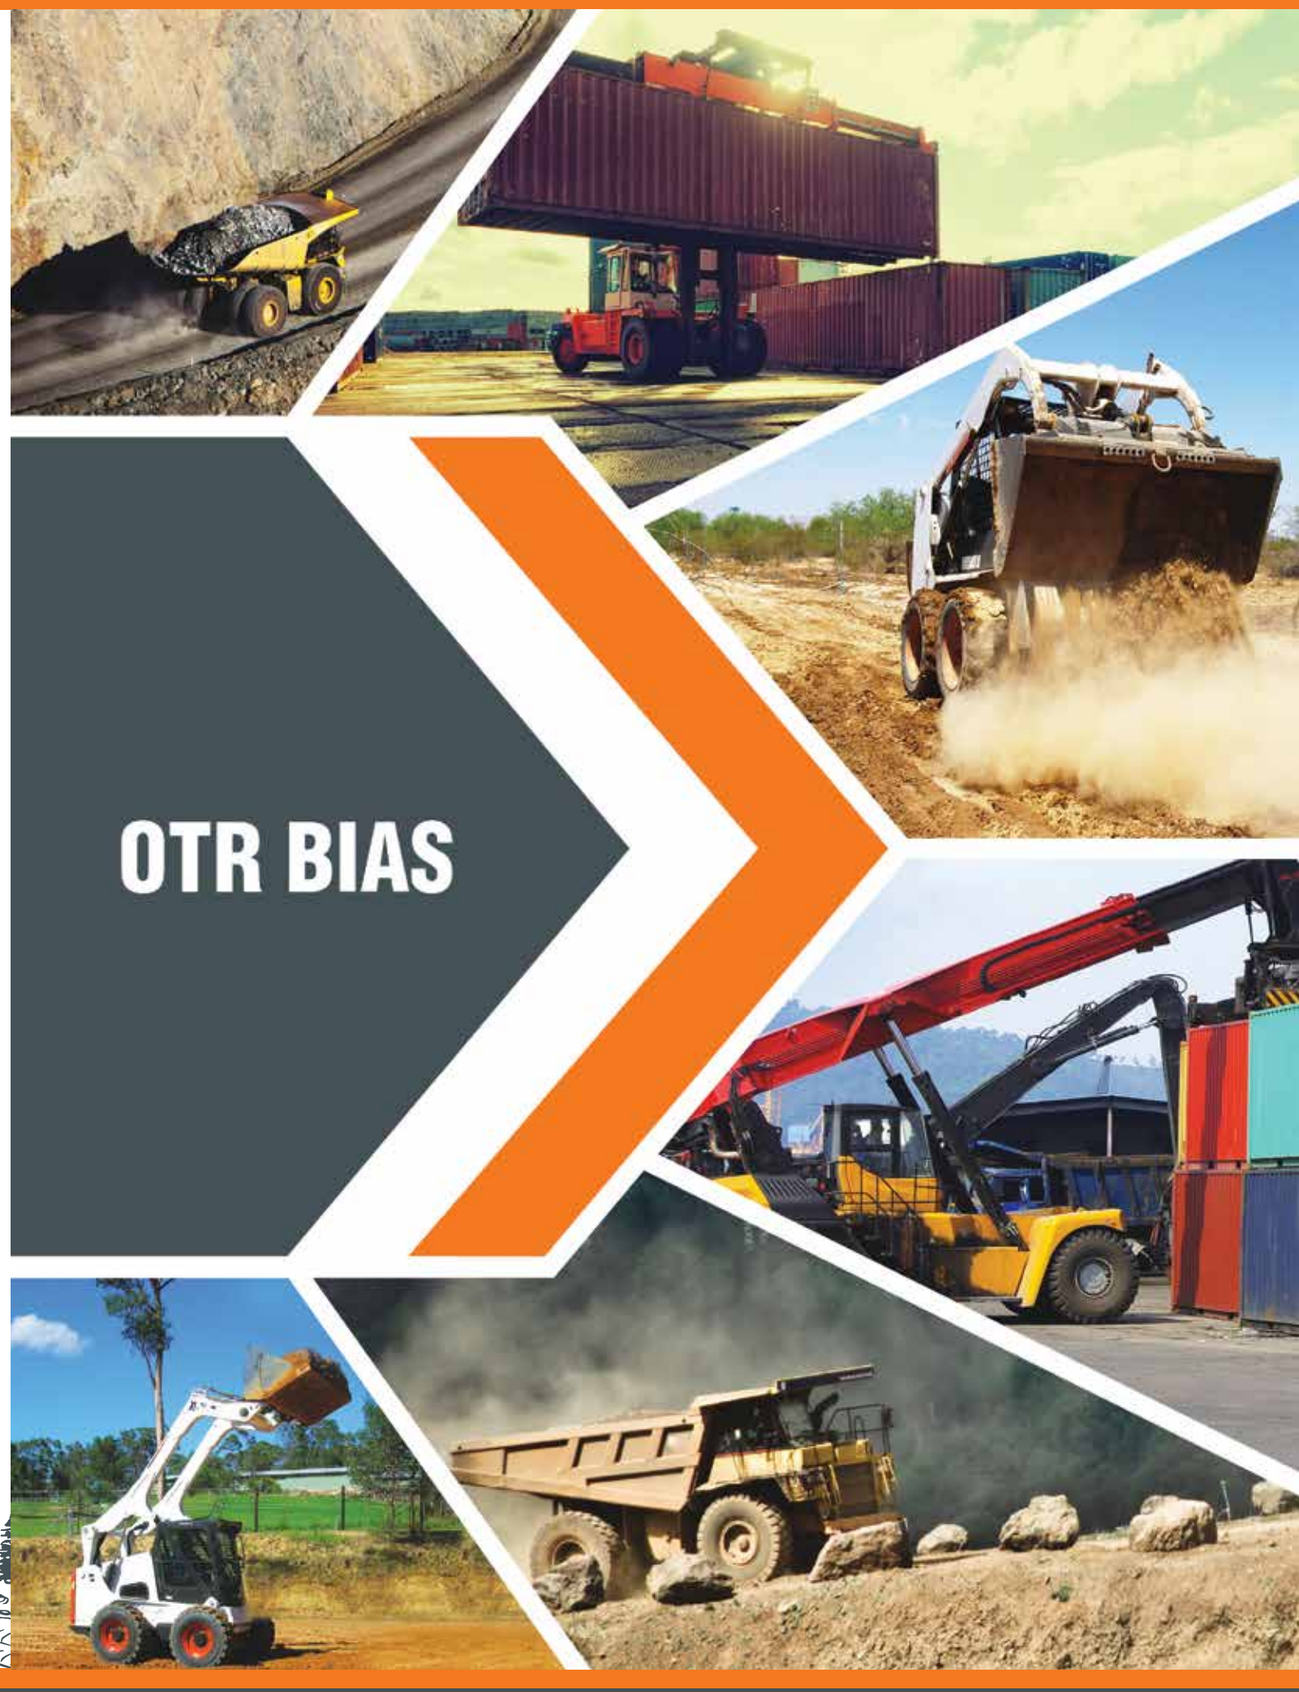
OTR BIAS

INDUSTRIAL

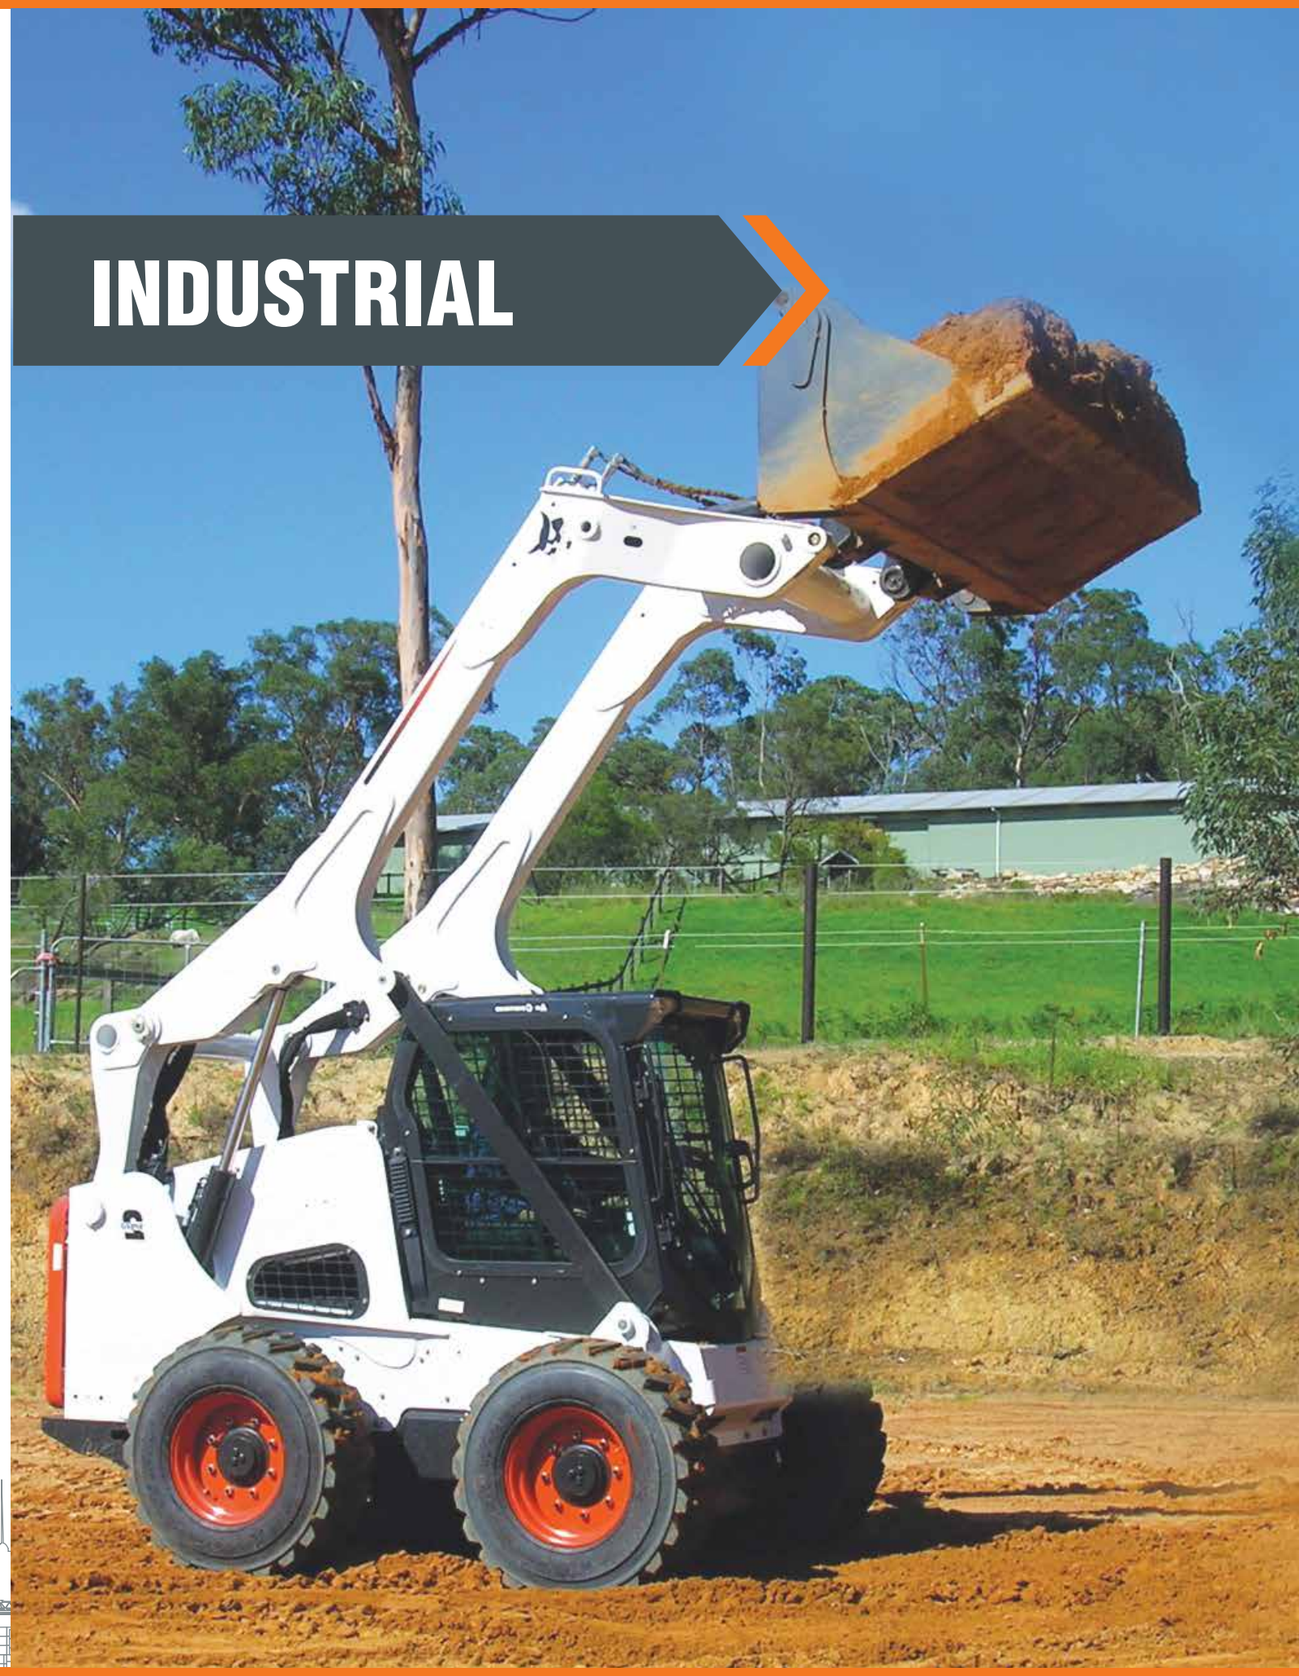

LIFT PRO

FEATURE
• Unique R1 pattern

BENEFIT
• Excellent traction

FEATURE
• Deep undertread

BENEFIT
• Improved puncture resistance

FEATURE
• Strong nylon casing & thick sidewall

BENEFIT
• High radial & lateral stability

* Designed for tele-handlers for agro-industrial use

LIFT PRO

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	RCI	Infl. Press.	Load Capacity		
						SW	OD						Free Rolling	Drive Wheel
			Free Rolling	Drive Wheel		mm in	mm in	mm in	mm in		bar psi	kmph mph	kg lbs	kg lbs
15.5/80-24	16	TL	163 A6	151 A6	W13	395 15.5	1250 49.2	562 21.5	3650 143.7	38	4 58	30 19	4875 10745	3450 7600

MPT 503

FEATURE
• Special tread pattern

BENEFIT
• Excellent traction

FEATURE
• Extra sidewall

BENEFIT
• Prevents Sidewall Damage

FEATURE
• Tie Bar

BENEFIT
• Enhanced Stability

FEATURE
• Wider tread width

BENEFIT
• Better performance.

MPT 503

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLC	RC	RCI	Infl. Press.	Load capacity	
					SW	OD					Max Speed	Max Load
					mm in	mm in	mm in	mm in		bar psi	kmph mph	kg lbs
18-19.5	16	TL	16 PR	14X19.5	465	1115	513	3345	34	4.5	160	4500
18-22.5	16	TL	16 PR	14X22.5	457	1180	543	3540	34	4.5	163	4850

MPT 602

FEATURE

- Wide open lug at shoulder

BENEFITS

- Excellent traction in all weather & service conditions
- Self-cleaning properties
- Resistant to side slip

MPT 602

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLC	RC	RCI	Infl. Press.	Load capacity	
					SW	OD					Max Speed	Max Load
					mm in	mm in	mm in	mm in		bar psi	kmph mph	kg lbs
12.5-18	12	TL	134 D	11.0	325 12.8	990 39.0	455 17.9	2910 114.6	34	3.5 51	65 40	2120 4665
10.00-20	16	TT	146 B	7.5	280 11.0	1075 42.3	509 20.0	3255 128.1	36	7.5 109	50 31	3000 6610
12.5-20	12	TL	135 D	11.0	325 12.8	1042 41.00	480 18.9	3065 120.7	35	3.5 51	65 40	2180 4795
405/70-20 (16.0/70-20)	14	TL	148 D	13.0	405 15.9	1180 42.7	547 19.7	3470 125.6	36	3.5 51	65 40	3150 6930
405/70-20 18 PR	18	TL		13.0	405 15.9	1080 42.5	505 19.9	3190 125.6		5.75 83	50 10	5200 11465 6150 13555
405/70-24 (16.0/70-24)	14	TL	151 D	13.0	405 15.9	1186 46.5	547 21.5	3535 139.2	38	4 58	65 40	3450 7950

MPT 800

MPT 800

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLC	RC	RCI	Infl. Press.	Load capacity	
					SW	OD					Max Speed	Max Load
					mm in	mm in	mm in	mm in		bar psi	kmph mph	kg lbs
405/70-20 (16.0/70-20)	14	TL	149 B	13.00	405 15.9	1098 43.2	505 19.8	3225 126.9	36	3.5 51	50 30	3250 7165
405/70-24 (16.0/70-24)	14	TL	152 B	13.00	405 15.9	1188 46.7	551 21.9	3490 137.4	38	4 58	50 30	3550 7825

LOADER PRO

FEATURES

- Designed for skid steer in industrial application
- Strong nylon casing
- Step down lug
- Specially designed rim guard
- High abrasion resistance compound for longer life
- Solid centre lug and deep shoulders

BENEFITS

- Designed for loose surfaces and heavy duty service
- Excellent durability
- Self cleaning properties
- Cut and chip resistant
- Protection against flats and wheel damage in rim flange area

LOADER PRO

SIZE	PR	Type	Rim	Unloaded Dimensions		SLR	RC	RCI	Infl. Press.	Load capacity	
				SW	OD					Max Speed	Max Load
				mm in	mm in	mm in	mm in		bar psi	kmph mph	kg lbs
10-16.5	10	TL	8.25	264 10.4	770 30.3	356 14.0	2296 90.4	29	5.2 75	10 6	2135 4710
12-16.5	12	TL	9.75	307 12.1	830 32.7	384 15.1	2475 97.4	31	5.5 80	10 6	2865 6320

LOADER PRO HD

FEATURES

- Designed for skid steers in industrial/construction application
- Strong nylon casing
- Step down lugs
- Rim guard to have protection against rim digging/damage
- High abrasion resistance compound for longer life
- Deep tread depth with solid centre lugs and deep shoulders

BENEFITS

- Particularly designed for loose surfaces and heavy duty service
- Excellent durability
- Self cleaning properties
- Protection against flats and wheel damage in the rim flange area
- Cut & chip resistant
- Excellent traction and puncture resistance

LOADER PRO HD

Size	PR	Type	Rim	Unloaded Dimensions		SLR	RC	RCI	Infl. Press.	Load capacity	
				SW	OD					Max Speed	Max Load
				mm in	mm in	mm in	mm in		bar psi	kmph mph	kg lbs
14-17.5	14	TL	10.5	350 13.7	930 36.6	430 16.9	2773 109.2	37	5.5 80	25 16	2830 6239
15-19.5	14	TL	11.75	400 15.7	1035 40.7	479 18.9	3086 121.5	35	4.8 70	25 16	3330 7341

GRIP MASTER LOADER HD

FEATURES

- Premium tyre with increased tread depth, extra thick sidewall for improved traction & puncture resistance
- Tough nylo0n casing that provides durability
- Specially designed rim guards provide greater protection of rim flange area

GRIP MASTER LOADER HD

Size	PR	Type	Rim	Unloaded Dimension		SLR	RC	RCI	Tread Depth	Infl. Press.	Recommended load, kg(lbs)			
				SW	OD						Speed, km/h(mph)			
				mm in	mm in	mm in	mm in		mm 32 nds	bar PSI	Static	10 5	15 10	30 20
10-16.5	10	TL	8.25	264 10.4	773 30.4	358 14.1	2320 91.3	29	20 25	5.2 75	2275 7440	2135 4705	1685 3715	1450 3195
12-16.5	12	TL	9.75	307 12.1	831 32.73	383 15.1	2490 98.0	31	23 26	5.5 80	4525 9975	2865 6315	2260 4980	1950 4300

GRIP X HD

FEATURES

- Multi-use tread pattern
- Deep tread
- Strong nylon casing
- Broad lugs
- Cut & chip resistant tread compound
- Specially designed rim guard

BENEFITS

- Designed for rough and hard concrete surfaces and heavy duty service
- Excellent durability
- Improved stability
- Protection against flats and wheel damage in rim flange area

GRIP X HD

Size	PR	Type	Rim	Unloaded Dimensions		SLR	RC	RCI	Infl. Press.	Load capacity	
				SW	OD					Max Speed	Max load
				mm in	mm in	mm in	mm in		bar PSI	kmph mph	kg lbs
10-16.5	10	TL	8.25	265 10.4	800 31.5	365 14.0	2360 93.0	29	5.2 75	10 6	2135 4710
	12								6.2 90		2375 5235
12-16.5	12	TL	9.75	315 12.4	864 34.0	392 15.4	2537 99.9	31	5.5 80	10 6	2865 6320
	14								6.2 90		3075 6780

MINING

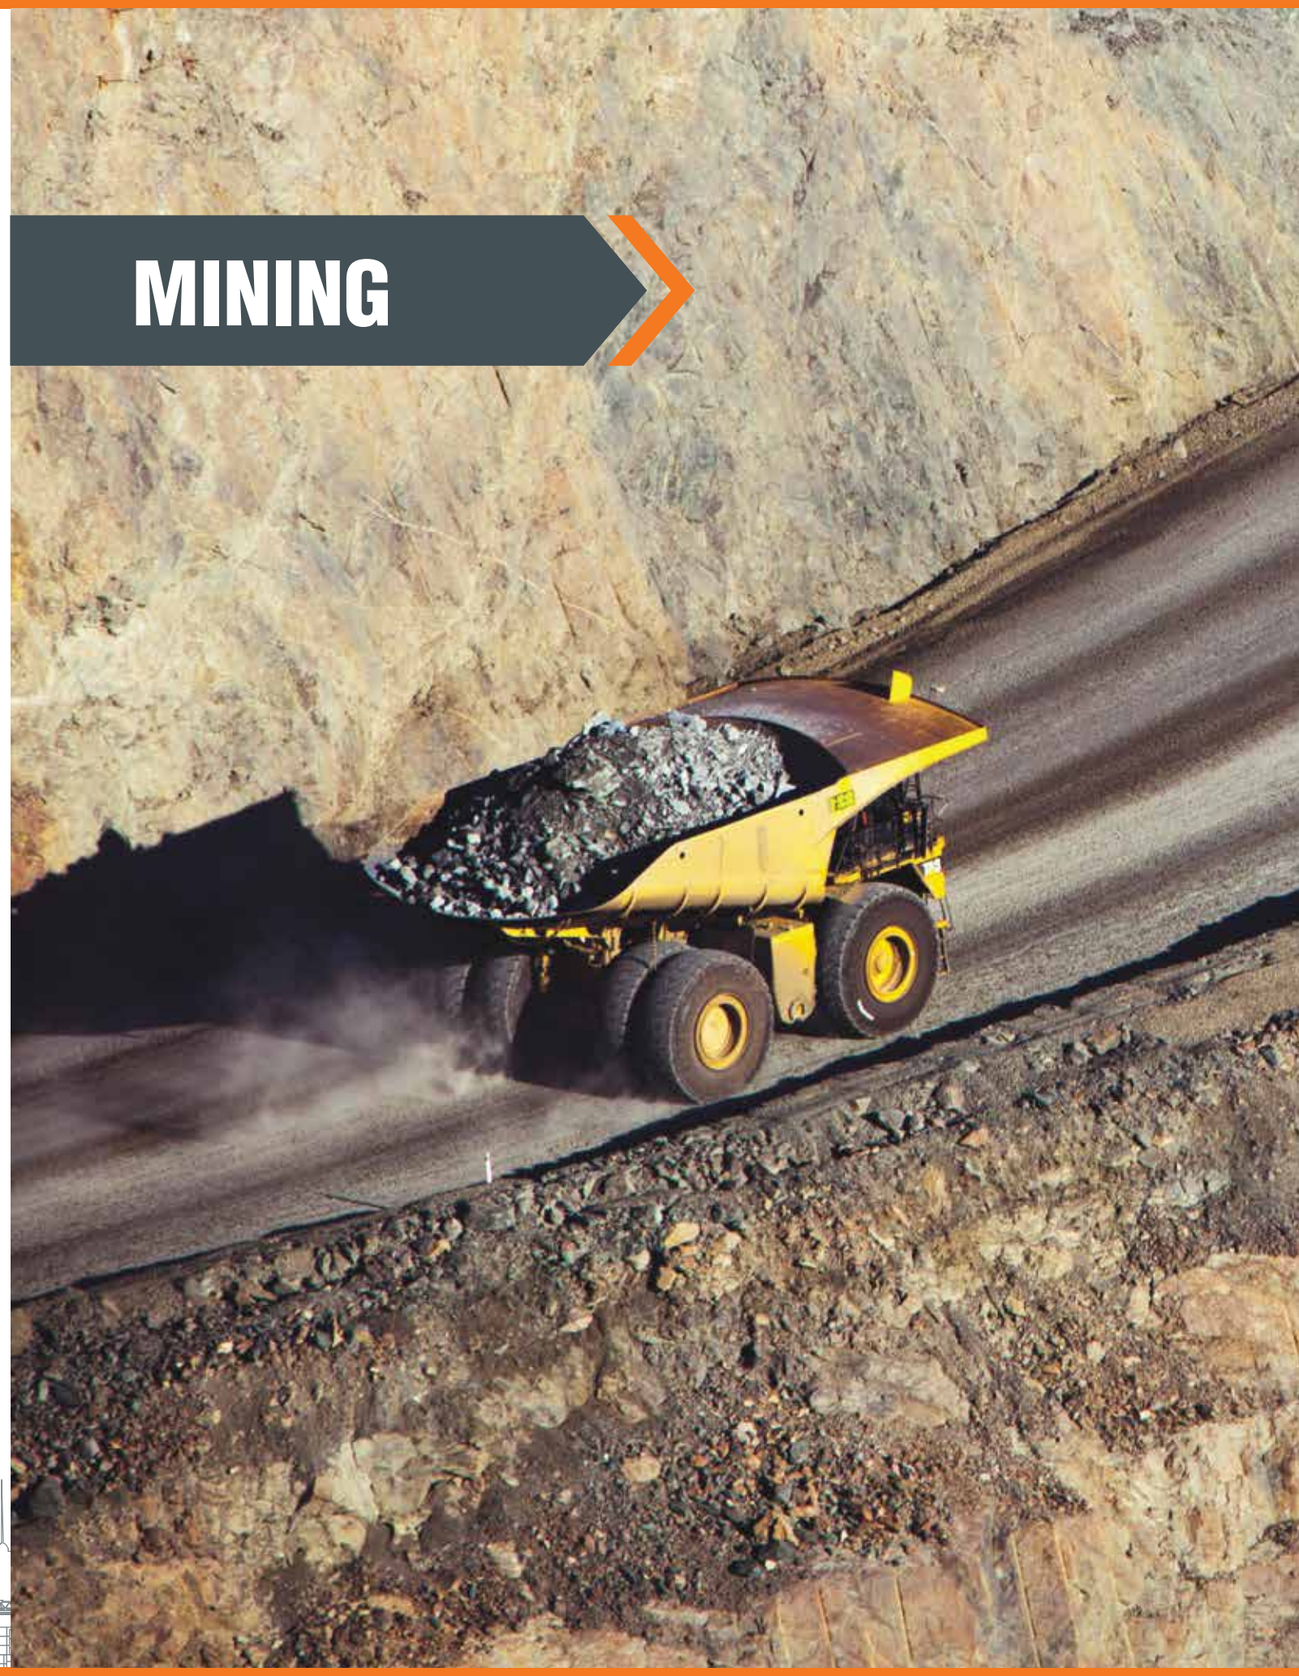

ROCK XL

TRA CODE : E4 / L4

FEATURES

- Self-cleaning sturdy lug
- More rubber in footprint
- Formulated with special compound
- Deep thread with robust casing

BENEFITS

- Better traction
- Penetration-resistant & improved mileage
- Resist cuts, snags with optimised wear
- Ideal for heavy-duty application in mining & rock excavation applications

ROCK XL

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCI	Load Capacity			
											Transport 50kmph / (30 mph)		Loading 10kmph / (5 mph)	
					SW	OD					Max load	Infl. Prs.	Max load	Infl. Prs.
					mm in	mm in	mm in	mm in	mm 32nds		kg lbs	bar pai	kg lbs	bar pai
18.00 - 25	40	TL	13.00	2.5	498 20	1673 66	764 30	4952 195	56 70	44	9750 21500	7.0 102	17000 37480	9.5 138
18.00-33	40	TL	13.00	2.5	498 20	1877 74	866 34	5556 219	58 73	46	11200 24690	7.0 102	19500 42990	9.5 138
21.00-35	36	TL	15.00	3.0	595 23	2052 81	953 38	6125 241	57 72	48	14000 30865	6.25 91	24300 53570	8.25 120
24.00-35	48	TL	17.00	3.5	653 26	2175 86	998 39	6390 252	60 75	49	18500 40785	6.5 95	21500 69445	8.5 125

TRAC XL

TRA CODE : E3 / L3

FEATURES

- Specially designed non-directional tread pattern
- High ground contact area

BENEFITS

- Heavy-duty tyre for rock, coal & log strewn terrain
- Superior traction
- Excellent grip on severe terrain

TRAC XL

SIZE	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCI	Load Capacity			
											Transport (50 kmph/ 30mph)		Loading (10 kmph/5mph)	
					SW	OD					Max load	Infl. Prs.	Max load	Infl. Prs.
					mm in	mm in	mm in	mm in	mm 32 nds		mm in	mm in	mm in	mm in
14.00-20	22	TT	10	2	382 15	1266 50	583 23	3750 148	27 34	39	5.5 80	4365 9625	8230 18145	8.5 125
17.5-25	16	TT TL	14	1.5	445 18	1348 53	624 25	3990 157	27 34	40	4250 9350	3 44	7300 16100	4.75 69
	20	TT TL									5000 11000	4 58	8250 18200	5.75 83
20.5-25	20	TT	17	2	521 21	1493 59	686 27	4416 174	37 46	42	6000 13200	3.25 47	9500 20900	4.5 65.25
23.5-25	20	TT TL	19.5	2.5	597 24	1617 64	740 29	4786 188	37 46	43	6150 13600	2.25 33	9500 20900	3 44
26.5-25	28	TL	22	3.0	677 27	1750 69	798 31	5125 202	40 50	45	10000 22000	3.5 51	15500 34170	4.75 69
29.5-25	32	TL	25	3.5	762 30	1878 73.9	821 32.3	5435 214	48 60	46	12500 27560	3.75 54	19250 42450	5 73

GRIP MASTER XL

TRA CODE: E4/L4

FEATURES

- Extra deep tread, & robust casing
- Formulated with special compound

BENEFITS

- Ideal for heavy duty application in mining. quarrying & rock excavation
- Resist cuts, snags with optimised wear

SIZE	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension SW	Unloaded Dimension OD	Static Loaded Radius	Rolling Circum	TREAD DEPTH	RCI	Load Capacity: Transport (50 kmph/ 30mph) Max load	Load Capacity: Transport (50 kmph/ 30mph) Infl. Prs.	Load Capacity: Loading (10 kmph/5mph) Max load	Load Capacity: Loading (10 kmph/5mph) Infl. Prs.
					mm in	mm in	mm in	mm in	mm 32 nds		mm in	mm in	mm in	mm in
18.00-25	32	TL	13.00	2.5	498 20	1673 66	764 30	4952 195	56 70	44	8750 19300	5.57 83	15000 33100	7.5 109
	40										9750 21500	7.0 102	17000 37480	9.5 138

SLICK-431

FEATURES

- Designed specially for underground mines
- Specially formulated deep tread with reinforced sidewall
- Flatter & larger tread width

BENEFITS

- Capable of carrying load under severe conditions
- Resistant to wear & damage, ensuring high mileage
- Higher contact area & traction

Size	PR	Type	Rim Width in	Unloaded Dimension SW	Unloaded Dimension OD	Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Infl. Prs.	Load Capacity: 10 kmph (5mph)	Load Capacity: 15 kmph (50mph)	Load Capacity: 25 kmph (15mph)
				mm in	mm in	mm in	mm in	mm 32nds		bar pai	kg lbs	mm in	kg lbs
9.00 - 20	16	TL	7.0	259 10.2	1033 40.7	477 18.8	3048 120.0	21 27	35	7.25 105	3170 6990	3965 8740	6340 13980

SLICK-404

FEATURES

- Tyre designed for underground mines, heavy-duty forklift & loader
- Deep tread with reinforced sidewall
- Flatter & larger tread width

BENEFITS

- Resistant to wear & damage, ensuring high mileage
- Higher ground contact area & traction

SLICK-404

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Infl. Prs.	Load Capacity		
					SW	OD						10 kmph (5mph)	15 kmph (10mph)	25 kmph (15mph)
					mm in	mm in	mm in	mm in	mm 32nds		bar pai	Max Load kg/lbs	Max Load kg/lbs	Max Load kg/lbs
12.00-20	20	TT	8.50	-	315 12.4	1163 45.8	538 21.2	3433 135.2	54 68	37	7.75 112	6000 13230	5220 11510	4800 10580
12.00-24	20	TT	8.50	-	310 12.2	1270 50	592 23.3	3759 148	54 68	39	8.25 120	6900 15210	6000 13230	5520 12170
17.5-25	20	TL	14.00	1.5	445 17.5	1399 55.08	648 25.5	4141 163	63 79	41	5.75 83	8250 18200	7180 15830	6600 14545
18.00 - 25	32	TL	13.00	2.5	498 19.6	1673 65.9	768 30.2	4952 195	77	44	7.5 109	15000 33100	13050 28770	12000 26456
	40								97		9.5 138	17000 37480	14790 30605	13600 29980

CONSTRUCTION

C 305

TRA CODE : R3

FEATURES

- Rugged design for multipurpose drive wheel tyre
- Strong nylon casing & increased tread depth
- High modulus compound

BENEFITS

- Provides higher flotation on soft soil with minimum ground disturbance
- Flat & wide footprint makes it suitable for industrial & road construction applications
- Longer service life in several operating conditions

C 305

Size	PR	Type	Rim	Unloaded dimension SW mm in	Unloaded dimension OD mm in	Static Loaded Radius mm in	Rolling Circum mm in	Tread Depth mm 32nds	RCL	Load Index / Speed Index	Infl. Prs. bar Psi	Load Capacity: Load Carrying Capacity, kg (lbs) with Speed, km/h (mph) — Not high & sustained torque; Road transport: Static	10 6	20 12	30 19	40 25	50 31	Field operation: Low Torque 10 6	Low Torque 20 12	High Tor 10 6
23.1 - 26	10	TL	**DW20**	587 23	1560 61	690 27	4545 179	27 35	43	149 A8	1.2 17	6830 15040	4460 9820	3650 8040	3180 7000	2970 6540	2700 5950	4160 9160	3560 7840	3180 7000
											1.3 19	7150 15750	4670 10290	3830 8440	3330 7330	3110 6850	2830 6230	4350 9580	3730 8220	3330 7330
											1.4 20	7480 16480	4880 10750	4000 8810	3480 7670	3250 7160	2960 6520	4550 10020	3900 8590	3480 7670
	12									153A8	1.5 22	7800 17180	5090 11210	4170 9190	3630 8000	3390 7470	3080 6780	4750 10460	4070 8960	3630 8000
											1.7 25	8400 18500	5480 12070	4490 9890	3910 8610	3650 8040	3320 7310	5110 11260	4380 9650	3910 8610
	16									159A8	1.9 28	8990 19800	5870 12930	4810 10590	4180 9210	3910 8610	3560 7840	5470 12050	4690 10330	4180 9210
											2.1 30	9550 21040	6230 13720	5100 11230	4440 9780	4150 9140	3780 8330	5810 12800	4980 10970	4440 9780
											2.3 33	10060 22160	6560 14450	5380 11850	4680 10310	4375 9640	3980 8770	6130 13500	5250 11560	4680 10310

TYROCK

FEATURES

- Traction pattern for front wheel & drive wheel of backhoe loader & wheel loader
- Wider lugs
- Tough nylon casing
- Special industrial tread compound

BENEFITS

- Engineered to provide excellent traction to drive wheels
- Suitable for on & off- road use in industrial, OTR & construction applications
- Resistance to tearing & cracking

TYROCK

Size	PR	Type	Rim Width in	Unloaded Dimension SW mm in	Unloaded Dimension OD mm in	Static Loaded Radius mm in	Rolling Circum mm in	Tread Depth mm 32nds	RCI	Load Capacity: Infl. Prs. bar psi	Free Rolling Wheel: Load Index Speed Symbol	Free Rolling Wheel: Max Load kg lbs	Drive Wheel: Load Index Speed Symbol	Drive Wheel: Max Load kg lbs
12.5/80-18	12	TT	9.0	308	988	465	2900	25	34	3.7	138 A8	2360	125 A8 125 A8	1650
		TL		39	12	18	114	31		54		5200		3635

TYROCK XL

TRA CODE : R4

FEATURES

- Traction pattern for drive wheel of backhoe loader & wheel loader with intermittent lugs
- Special stone ejector & casing protector
- Tough nylon casing
- Special industrial tread compound

BENEFITS

- Engineered to provide excellent traction to drive wheels
- Intermittent lugs provide higher strength & stability to tyre
- Suitable for on & off-road use in industrial, OTR & construction applications
- Resistance to tearing & cracking

TYROCK XL

Size	PR	Type	Rim Width in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Index / Speed Index	Load Capacity							
											Industrial Use					Agricultural Use		
				SW	OD						Infl. Prs.	Constant Load		Cyclic Application		Infl. Prs.	Road Transport	
				mm in	mm in	mm in	mm in	mm 32 nds			bar psi	20 12	40 25	20 12	40 25	bar psi	20 12	40 25
16.9 - 28	12	TT	W15L	440 17.3	1430 55.6	650 25.6	4233 166.7	34 44	41	152 A8	2.3 33	3600 7930	3300 7270	4060 8940	3300 7270	2.1 30	3380 7440	2520 5550
											2.4 35	3700 8150	3390 7470	4170 9190	3390 7470	2.2 32	3470 7640	2590 5700
											2.6 38	3870 8520	3550 7820	4370 9630	3550 7820	2.4 35	3650 8040	2725 6000
19.5L - 24	12	TL	W17L	495 19.5	1335 52.6	592 23.3	3880 152.8	30 38	40	151 A8	2.3 33	3450 7600				3450 7600	2.1 30		2650 5840

LOADER XL

TRA CODE : G2/L2

FEATURES

- R4 tread pattern
- Superior compound
- Strong nylon casing
- Tough wide base

BENEFITS

- Suitable on & off the road.
- Designed for crane, re & rescue vehicles
- Capable to run at high speeds
- Excellent traction & handling response
- Ideal for rugged service

LOADER XL

Size	PR	Type	Rim Width in	Flange Height in	Unloaded dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCI	Load Capacity			
											GRADER SERVICE		LOADER SERVICE	
											40kmph / (25mph)		10kmph / (5mph)	
					SW	OD OD					Max load	Infl. Prs.	Max load	Infl. Prs.
					mm in	mm in	mm in	mm in	mm 32 nds		kg lbs	bar psi	kg lbs	bar psi
15.5-25	12	TL	12.00	1.3	394 16	1278 50	594 23	3780 149	22 28	39	2650 5840	2.5 36.0	5600 12345	4.0 58
17.5-25	12	TL	14	1.5	445 18	1348 53	614 24	3990 157	23 29	40	2900 6400	2.0 29.0	6150 13600	3.5 51
	16	TL									3350 7400.0	3.0 43	13600 16100	4.7 69
20.5-25	12	TL	17	2.0	520 21	1492 59	686 27	4416 174	28 35	42	3550 7850	1.75 25.0	6700 14800	2.5 36
	16	TL									4000 8800.0	2.25 33	8250 18200	3.5 51

GRADER XL PLUS

TRA CODE : G2/L2

FEATURES

- Special tread design with heavy centre mass
- Premium tyre with heavy duty carcass
- More number of lugs
- Sturdy & robust tyre for the drive wheel application
- Superior tread & sidewall compound
- Strong nylon casing

BENEFITS

- For heavy duty services in mining, road & construction applications
- Higher stability & trouble-free service in severe conditions
- Heat, cut & weather resistant
- Withstands cuts, snags & bruises

GRADER XL PLUS

Size	PR	Type	Rim Width in	Flange Height in	Unloaded dimension SW mm in	Unloaded dimension OD mm in	Static Loaded Radius mm in	Rolling Circum mm in	Tread Depth mm 32 nds	RCI	Load Capacity GRADER SERVICE 40kmph / (25mph) Infl. Prs. bar psi	Load Capacity GRADER SERVICE 40kmph / (25mph) Max load kg lbs	Load Capacity LOADER SERVICE 10kmph / (5mph) Infl. Prs. bar psi	Load Capacity LOADER SERVICE 10kmph / (5mph) Max load kg lbs
13.00-24	12	TT	8.00	1.4	351 13.81	1301 84.5	610 24	4008 157.8	24 30	39	3.0 44.0	2725 6000	4.5 65	5600 12350
	16	TT									3.8 54.0	3250 7165	6.0 87	6500 14300

GRADER XL

TRA CODE : G2/L2

FEATURES

- Sturdy & robust tyre for the drive wheel application
- Superior tread & sidewall compound
- Strong nylon casing

BENEFITS

- Smooth & trouble-free service in severe conditions
- Heat, cut & weather resistant
- Withstands cuts, snags & bruises
- High load capacity

GRADER XL

Size	PR	Type	Rim Width in	Flange Height in	Unloaded dimension SW mm in	Unloaded dimension OD OD mm in	Static Loaded Radius mm in	Rolling Circum mm in	Tread Depth mm 32 nds	RCI	Load Capacity GRADER SERVICE 40kmph / (25mph) Infl. Prs. bar psi	Load Capacity GRADER SERVICE 40kmph / (25mph) Max load kg lbs	Load Capacity LOADER SERVICE 10kmph / (5mph) Infl. Prs. bar psi	Load Capacity LOADER SERVICE 10kmph / (5mph) Max load kg lbs
13.00 - 24	12	TL	8.00	1.4	333 13.1	1278 50.3	582 22.9	3783 148.9	23 29	39	2725 6000	3.0 44.0	5600 12350	4.5 65
	16	TL									3250 7165	3.8 54.0	6500 14300	6.0 87
14.00 - 24	12	TL	8.00	1.4	362 14.3	1348 53.1	614 24.2	3990 157.1	24 31	40	3075 6800	2.5 36.0	6300 13890	4.25 62
	16	TL									3650 8050	3.5 51	7300 16090	5.5 80

PORT

PORT PRO RX

TRA CODE : IND-4

FEATURES

- Special wear resistance compound
- Strong nylon casing
- Strong bead
- Higher under tread

BENEFITS

- Supports heavy load & extreme working conditions
- Long service life
- Ideal for usage on hard, concrete & asphalt surfaces
- Puncture resistance

PORT PRO RX

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Capacity					
					SW	OD					Infl. Prs.	25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load	Max Load	Max Load	Max Load	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds		bar psi	kg ibs	kg ibs	kg ibs	kg ibs	kg ibs
12.00-24	20	TT	8.5	1.3	325	1285	603	3803	35	39	9.9	8630	9320	10000	11040	12420
					13	51	24	150	44		144	19025	20545	22045	24340	27380
18.00 - 25	40	TL	13	2.5	498	1673	764	4952	56	44	10	21250	22950	24650	27200	30600
					20	66	30	195	71		145	46845	50595	54345	59965	67460
18.00-33	40	TL	13	2.5	498	1877	866	5556	58	46	11.4	25000	27000	29000	32000	36000
					20	74	34	219	73		165	55000	59400	63800	70400	79200

PORT PRO TX

TRA CODE : IND-3

FEATURES

- Sturdy lugs
- Flat tread with large width
- More rubber in footprint
- Continuous tread pattern

BENEFITS

- Self cleaning property
- High ground contact area for good traction on paved surface
- Improved penetration resistance
- Longer service life

PORT PRO TX

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Capacity					
					SW	OD					Infl. Prs.	25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load	Max Load	Max Load	Max Load	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds		bar psi	kg ibs	kg ibs	kg ibs	kg ibs	kg ibs
18.00 - 25	40	TL	13.00	2.5	510	1617	743	4781	32	43	10	21250	22950	24650	27200	30600
					20	64	29	188	40		145	46845	50595	54345	59965	67460
21.00 - 25	40	TL	15.00	3.0	585	1759	800	5140	35	45	10	25800	27800	29900	33000	37100
					23	69.3	31.5	202.4	45		145	56760	61160	65780	72600	81620
21.00 - 35	40	TL	15.00	3.0	580	2025	930	5987	37	48	10	30400	32800	35200	38900	43700
					22.8	79.7	36.6	235.7	47		145	66880	72160	77440	85580	96140

PORT PRO SL

TRA CODE : IND-4

FEATURES

- Flat tread with large width
- Specially formulated tread compound
- Reinforced sidewall

BENEFITS

- Self cleaning property
- High ground contact area for good traction on paved surface
- Improved penetration resistance
- Longer service life

PORT PRO SL

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Capacity					
					SW	OD					Infl. Prs.	25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load	Max Load	Max Load	Max Load	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds		bar psi	kg ibs	kg ibs	kg ibs	kg ibs	kg ibs
18.00 - 25	40	TL	13.00	2.5	498 20	1673 66	768 30	4952 195	56 71	44	10.5 150	21250 46845	22950 50595	24650 54345	27200 59965	30600 67460
18.00-33	40	TL	13.00	2.5	498 20	1877 74	862 34	5556 219	70 88	46	11.4 165	25000 55000	27000 59400	29000 63800	32000 70400	36000 79200

ROCK XL

TRA CODE : IND-3

FEATURES

- Special wear resistance compound
- Strong nylon casing
- Strong bead
- Higher under tread

BENEFITS

- Supports heavy load & extreme working conditions
- Long service life
- Ideal for usage on hard, concrete & asphalt surfaces
- Puncture resistance

ROCK XL

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Capacity					
					SW	OD					Infl. Prs.	25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load	Max Load	Max Load	Max Load	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds		bar psi	kg ibs	kg ibs	kg ibs	kg ibs	kg ibs
16.00 - 25	32	TL	11.25	2	444 18	1485 59	682 27	4418 174	29 37	42	10 145	15625 34375	16875 37125	18125 39875	20000 44090	22500 49500

SLICK-404

TRA CODE : L5S

FEATURES

- Tyre designed for underground mines, heavy duty forklift & loader
- Deep tread with reinforces sidewall
- Flatter & larger tread width

BENEFITS

- Resistant to wear & damage, ensuring high mileage
- Higher ground contact area & traction

SLICK-404

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Capacity					
					SW	OD					Infl. Prs.	25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load	Max Load	Max Load	Max Load	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds		bar psi	kg ibs	kg ibs	kg ibs	kg ibs	kg ibs
12.00-20	20	TT	8.50	-	315 12	1163 46	538 21	3433 135	54 68	37	10 145	7690 16955	8300 18300	8920 19660	9840 21960	11070 24405
12.00-24	20	TT	8.50	-	310 12	1270 50	592 23	3759 148	54 68	39	8.25 120	5520 12170	6900 15210	10005 22055	11040 24340	12420 27380
17.5-25	20	TL	14.00	1.5	445 18	1399 55	648 26	4141 163	63 79	41	5.75 83	6600 14545	8250 18185	11960 26365	13200 29090	14850 32730
18.00 - 25	40	TL	13.00	2.5	498 20	1673 66	768 30	4952 195	77 97	44	10.5 150	21250 46845	22950 50595	24650 54340	27200 59965	30600 67460

SLICK-431

TRA CODE : L4S

FEATURES

- Designed specially for underground mines
- Specially formulated deep tread with reinforced sidewall
- Flatter & larger tread width

BENEFITS

- Capable of carrying load under severe conditions
- Resistant to wear & damage, ensuring high mileage
- Higher contact area & traction

SLICK-431

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Infl. Prs.	Load Capacity				
					SW	OD						25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load kg/lbs	Max Load kg/lbs	Max Load kg/lbs	Max Load kg/lbs	Max Load kg/lbs
					mm in	mm in	mm in	mm in	mm 32nds		bar pai					
16.00 - 25	32	TL	11.25	2	432 17	1548 61	715 28	4580 180	54 68	43	10 145	15625 34375	16875 37125	18125 39875	20000 44090	22500 49500

PORT XL PLUS

TRA CODE : IND-4.5

FEATURES

- First in the industry with IND 4.5 specifcations - extra deep tread higher base cover compared to IND 4
- Superior tread compound
- Tough & heavy-duty carcass
- Strong bead

BENEFITS

- Suitable for heavy duty use on hard, concrete & asphalt surfaces
- Reduces heat build-up
- Improved puncture resistance
- Longer service life

PORT XL PLUS

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Capacity					
					SW	OD					Infl. Prs.	25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load	Max Load	Max Load	Max Load	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds		bar psi	kg ibs	kg ibs	kg ibs	kg ibs	kg ibs
18.00 - 25	40	TL	13	2.5	505 19.9	1680 66.2	768 195.9	4975 195.9	67 84	44	10 145	21250 46845	22950 50595	24650 54345	27200 59965	30600 67460

GRIP MASTER-ND

TRA CODE : IND-3

FEATURES

- Specially designed non-directional tread pattern
- Heavy duty nylon casing
- Special heat, cut & weather resistance compound

BENEFITS

- Long service life
- Reduced heat build up
- Higher stability

GRIP MASTER-ND

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Capacity					
					SW	OD					Infl. Prs.	25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load	Max Load	Max Load	Max Load	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds		bar psi	kg ibs	kg ibs	kg ibs	kg ibs	kg ibs
14.00 - 24	28	TT TL	10.00	1.5	385 15	1368 15	630 54	4050 25	26 159	40	10 145	12500 27560	13500 29760	14500 31965	16000 35275	18000 39685
18.00 - 25	40	TL	13.00	2.5	498 20	1615 64	738 29	4780 188	30 38	44	10 145	21250 46845	22950 50595	24650 54345	27200 59965	30600 67460

PORT-PRO SL

TRA CODE : IND-5

FEATURES

- Flat tread with large width
- Specially formulated tread compound
- Reinforced sidewall

BENEFITS

- High ground contact area for good traction on paved surface
- Improved penetration & heat resistance
- Longer service life

PORT PRO SL

Size	PR	Type	Rim Width in	Flange Height in	Unloaded Dimension		Static Loaded Radius	Rolling Circum	Tread Depth	RCL	Load Capacity					
					SW	OD					Infl. Prs.	25 kmph (15mph)	10 kmph (5mph)	5 kmph (3mph)	1 kmph (0.6mph)	static
												Max Load	Max Load	Max Load	Max Load	Max Load
					mm in	mm in	mm in	mm in	mm 32 nds		bar psi	kg ibs	kg ibs	kg ibs	kg ibs	kg ibs
18.00 - 25	40	TL	13.00	2.5	498 20	1673 66	768 30	4952 195	80 101	44	10 145	21250 46845	22950 50595	24650 54345	27200 59965	30600 67460

TYRE CARE AND USAGE MANUAL

GENERAL INFORMATION

CEAT Agri radial tyres are designed for both off-road and on-road applications for equipment like agricultural tractors, trailers, implements and harvesters. Factors such as improper selection, handling and driving habits can reduce tyre life.

To obtain the best results from the tyre, correct inflation pressure has to be maintained at all times. It is recommended to check the inflation pressure after long breaks or on daily basis. If the heat buildup due to the inflation pressure exceeds additional 1.1 bar (16 psi) to 1.0 bar (14.5 psi), then the load or driving speed has to be lowered.

MOUNTING AND DEMOUNTING
Always practice correct mounting and dismounting procedure and by taking all safety measures.

DIMENSIONS
All the dimensions and the tolerances in this catalogue are based on nominal TRA and ETRTO standards.

QUALITY SYSTEMS AND CERTIFICATION

CEAT, an ISO 9001 certified company since 1994, also is the first tyre company in India to be certified with the most stringent quality certification of IS0/T5 16949: 2002 (QS 9000) from TUV.

The tyres manufactured by CEAT are DOT, ECE and INMETRO certified.

QUALITY POLICY

We, at CEAT, are committed to be customer centric by consistently delivering excellent products and services at competitive prices.

It will be our endeavor to continuously improve all business processes and ensure conformity to the established quality systems.

We intend to accomplish this through constantly upgrading the skills of our employees.

TYRE DESCRIPTION

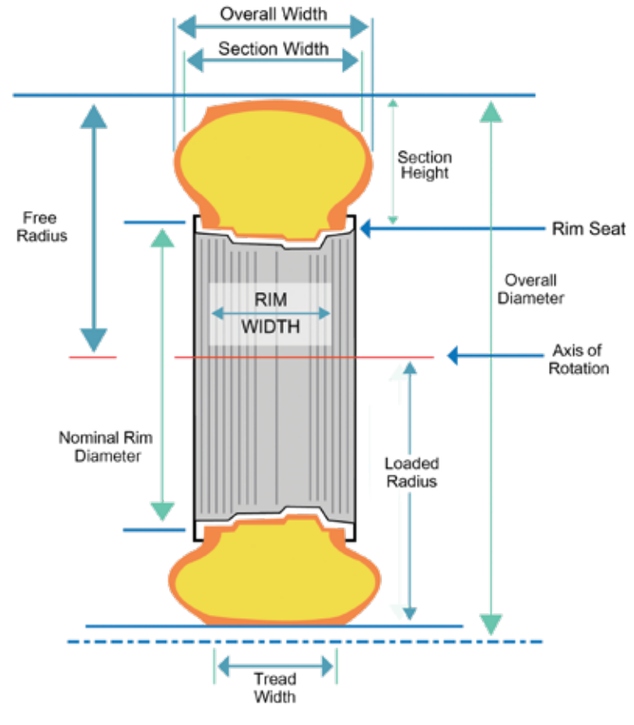

Section Height: The height of a new tyre from the nominal rim diameter to the top of the tread.

Section Width: The width of a new tyre including normal sidewalls, but not including protective side ribs, bars, or other decorations.

Overall Diameter: Twice the section height (unloaded) plus the nominal rim diameter.

Rim Width: The measurement on the inside of the rim between the two flanges.

Rim Diameter Code: The nominal rim diameter in inches.

Rolling Circumference: The distance an inflated and loaded tyre will roll in one revolution.

Aspect Ratio: Used to describe the ratio of tyre “section height” to “section width.” A tyre with an aspect ratio of 85 would have a tyre height equal to 85% of the tyre’s greatest width.

TYRE NOMENCLATURE

RADIAL

440/65 R 24

- **Rim diameter in inches**
- **Radial**
- **Aspect ratio in %**
- **Section width in mm**

BIAS

17.5 - 25

- **Rim diameter in inches**
- **Section width in inches**

500/50 - 17

- **Rim diameter in inches**
- **Bias**
- **Aspect ratio in %**
- **Section width in mm**

TYRE SIDEWALL MARKING

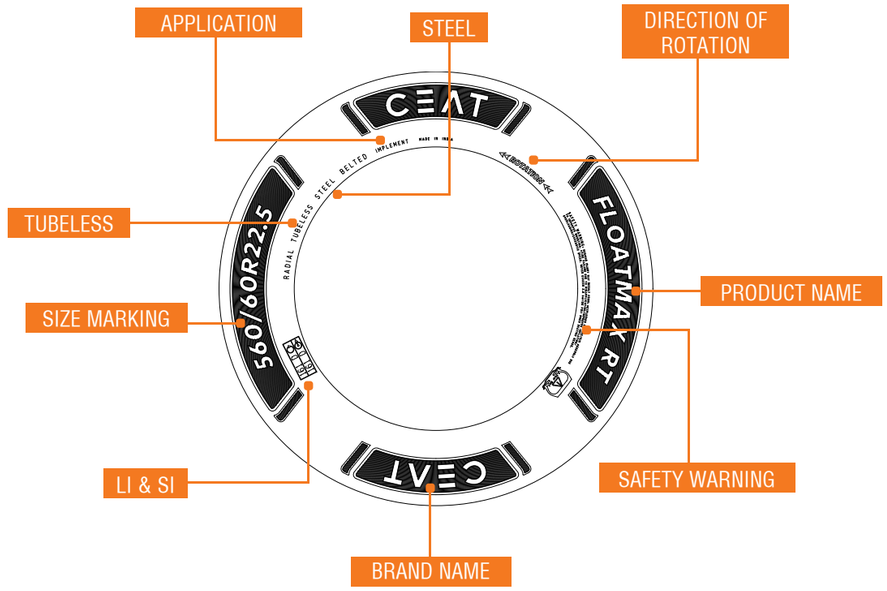

Travel direction in case of directional tread design

Safety warning

Tubeless **Tubeless - Tyres without tube**

Free rolling and drive wheels

Load Index: Relates to the maximum weight permitted for each tyre at a set inflation pressure.

Speed Index: Is the maximum rated speed the tyre can operate at safety. For application at lower speed load carrying capacity of tyre increases and vice versa.

L (In Size Designation): Low section height farm tyres

SL (In Size Designation): Service limited to agricultural usage

NHS: Not for highway service

ML: Mining logging (Intermittent highway use)

DT: Desert tyre (Sand surface and asphalt spreader)

LOAD INDEX AND SPEED SYMBOL

According to ETRTO (The European Tyre and Rim Technical Organisation), as well as to ECE (Economic Commission for Europe-UN Institution Geneva), the maximum load capacity, as well as the maximum speed are indicated by load index and speed symbol.

The following table shows the meaning of each speed symbol and the load in kg/lbs corresponding to each load index:

Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs
102	850 / 1874	129	1850 / 4078	156	4000 / 8818	183	8750 / 19290
103	875 / 1929	130	1900 / 4189	157	4125 / 9094	184	9000 / 19841
104	900 / 1984	131	1950 / 4299	158	4250 / 9369	185	9250 / 20392
105	925 / 2039	132	2000 / 4409	159	4375 / 9645	186	9500 / 20944
106	950 / 2094	133	2060 / 4541	160	4500 / 9921	187	9750 / 21495
107	975 / 2149	134	2120 / 4674	161	4625 / 10196	188	10000 / 22046
108	1000 / 2205	135	2180 / 4806	162	4750 / 10472	189	10300 / 22707
109	1030 / 2271	136	2240 / 4938	163	4875 / 10747	190	10600 / 23369
110	1060 / 2337	137	2300 / 5071	164	5000 / 11023	191	10900 / 24030
111	1090 / 2403	138	2360 / 5203	165	5150 / 11354	192	11200 / 24691
112	1120 / 2469	139	2430 / 5357	166	5300 / 11684	193	11500 / 25353
113	1150 / 2535	140	2500 / 5511	167	5450 / 12015	194	11800 / 26014
114	1180 / 2601	141	2575 / 5677	168	5600 / 12346	195	12150 / 26786
115	1215 / 2679	142	2650 / 5842	169	5800 / 12787	196	12500 / 27557
116	1250 / 2756	143	2725 / 6007	170	6000 / 13228	197	12850 / 28329
117	1285 / 2833	144	2800 / 6173	171	6150 / 13558	198	13200 / 29101
118	1320 / 2910	145	2900 / 6393	172	6300 / 13889	199	13600 / 29982
119	1360 / 2998	146	3000 / 6614	173	6500 / 14330	200	14000 / 30864
120	1400 / 3086	147	3075 / 6779	174	6700 / 14771	201	14500 / 31966
121	1450 / 3197	148	3150 / 6944	175	6900 / 15212	202	15000 / 33069
122	1500 / 3307	149	3250 / 7165	176	7100 / 15653	203	15500 / 34171
123	1550 / 3417	150	3350 / 7385	177	7300 / 16093	204	16000 / 35273
124	1600 / 3527	151	3450 / 7606	178	7500 / 16534	205	16500 / 36376
125	1650 / 3638	152	3550 / 7826	179	7750 / 17086	206	17000 / 37478
126	1700 / 3748	153	3650 / 8047	180	8000 / 17637	207	17500 / 38580
127	1750 / 3858	154	3750 / 8267	181	8250 / 18188	208	18000 / 39683
128	1800 / 3968	155	3875 / 8543	182	8500 / 18739	209	18500 / 40785

Speed Symbol	Kmph / mph
A1	5 / 3
A2	10 / 6
A3	15 / 9
A4	20 / 12
A5	25 / 16
A6	30 / 19
A7	35 / 22
A8	40 / 25
B	50 / 31
C	60 / 37
D	65 / 40
E	70 / 44
F	80 / 48
G	90 / 56
J	100 / 62
K	110 / 68
L	120 / 75
M	130 / 81
N	140 / 87
P	150 / 93
Q	160 / 99
R	170 / 106
S	180 / 112

RMA CODE FOR AGRICULTURAL TYRES AND TYPE OF TYRE SERVICE

RMA INDUSTRY CODES
The Tyre and Rim Association has approved the following tyre designations for agricultural tyres, regardless of manufacturer.

CODE	INDUSTRY TYRE TYPE	TYRE SERVICE
Front Tractor Tyres		
F-1	Agricultural single-rib tread	Rice farming
F-2M	Agricultural multiple-rib tread	General farming
F-2	Agricultural multiple-rib tread	General farming
F-3	Industrial multiple-rib tread	Light industrial service
F-2D	Agricultural dual-rib	
Drive Tractor Tyres		
R-1	Drive wheel, regular tread	General farming
R-1W	Drive wheel, wet traction tread	Wet or moist soil
R-2	Cane and Rice, drive wheel, deep tread	Wet muck, Sugar cane, Rice farming
R-3	Drive wheel, shallow tread	Sandy or volcanic ash soils, Orchards, Highway mowing, Golf course work, Light industrial service
R-4	Industrial tractor, drive wheel, intermediate tread	Light industrial service, Highway mowing
Flotation Tyres		
HF-1	High flotation, rib tread	Golf course work
HF-2	High flotation, regular lug tread	General farming
HF-3	High flotation, deep lug tread	Wet or moist soil
HF-4	High flotation, extra deep tread	Swamp land
Garden Tractor Tyres		
	Lug Type	Gardens
Implement Tyres		
I-1	Rib tread	Free rolling wheels
I-2	Moderate traction implement	Drive or free rolling wheels
I-3	Traction tread	Drive wheels
I-6	Smooth tread	

CONVERSION TABLE

1 centimetre	cm	= 0.3937 inch	1 litre	l	= 0.264 US gallon
1 inch	in	= 2.54 cm	1 US gallon	gal	= 3.785 litres
1 Metre	m	= 3.281 feet	1 kilogram	kg	= 2.205 pounds
1 foot	ft	= 0.3048 m	1 kilogram	kg	= 1 da N (de anewton)
1 kilometre	km	= 1. 6093 km	1 Pound	lb	=0.4536 kg
1 mile	mi		1 bar		= 14.484 p.s.i. (Pounds per square inch)
			1 bar		= 100 kpa (kilo pascal)

PRESSURE CONVERSION TABLE

PSI	BAR	KPA	PSI	BAR	KPA	PSI	BAR	KPA
10	0.7	70	29	2	200	48	3.3	330
11	0.8	80	30	2.1	210	49	3.4	340
12	0.8	80	31	2.1	210	50	3.4	340
13	0.9	90	32	2.2	220	51	3.5	350
14	1	100	33	2.3	230	52	3.6	360
15	1	100	34	2.3	230	53	3.7	370
16	1.1	110	35	2.4	240	54	3.7	370
17	1.2	120	36	2.5	250	55	3.8	380
18	1.2	120	37	2.6	260	56	3.9	390
19	1.3	130	38	2.6	260	57	3.9	390
20	1.4	140	39	2.7	270	58	4	400
21	1.4	140	40	2.8	280	59	4.1	410
22	1.5	150	41	2.8	280	60	4.1	410
23	1.6	160	42	2.9	290	61	4.2	420
24	1.7	170	43	3	300	62	4.3	430
25	1.7	170	44	3	300	63	4.3	430
26	1.8	180	45	3.1	310	64	4.4	440
27	1.9	190	46	3.2	320	65	4.5	450
28	1.9	190	47	3.2	320	66	4.5	450

TYRE CARE AND MAINTENANCE GUIDELINES

GENERAL

1. Tyre mounting and dismounting can be dangerous and should only be performed by trained personnel.
2. Never strike the tyre or rim with a hammer.
3. Always use proper tyre mounting tools and equipment.
4. Always work on a clean surface.

MOUNTING

1. Thorough inspection of the inside of the casing is necessary to ensure absence of any defects or foreign material.
2. Both tyre and tube (if any) should be completely dry.
3. Use the correct tube. Always remember that with a new tyre, a new tube (if required) should be used.
4. For tube type tyres, make sure tube and flap are correct and not damaged.
5. Always prepare a new O-ring for tubeless type tyres. Check air leakage points.
6. Correct rims which are clean and in good condition should be used for tyre mounting.
7. Proper lubrication to rims and beads helps to facilitate easy and safe mounting
8. Application of excessive lubricant causes the tyre to slip on the rim, hence it should not be practiced.
9. Mount the tyre with the pry notch 60° to 90° from the valve.
10. Always mount (and dismount) tyres on the short side of the rim drop centre.
11. Always keep the opposite bead in the deep well to facilitate clearance over the rim flange to prevent bead damage.

INFLATION AND PROPER BEAD SEATING

1. Once a tyre is mounted the beads should be seated before the lubricant dries.
2. Safety cage or a security bar should be used during inflation. In case the cage and bar is absent stand, to one side of the tyre and use an air line with a clip-on chuck and an in-line gauge that is at least 6 feet from the tyre valve.
3. Centre the tyre on the rim and inflate to 35 psi (2.4 bar) to obtain initial bead seat.
4. Deflate the tyre to about 2 psi (0.14 bar) to partially relax the beads.
5. Re-inflate the tyre to 35 psi (2.4 bar) to obtain final bead seat.
6. Adjust the tyre to the correct working pressure.
7. Ensure the pressure is correct all times. Check the pressure regularly and adjust it whenever necessary.
8. Check the loads and their centreing periodically.
9. Check the traveling cycles and the actual operating speed.
10. Thoroughly inspect the centreing rings above the inside and outside beads to ensure that they are completely seated.
11. If a bead is not completely seated:
    - Deflate the tyre completely and re-inflate to 35 psi (2.4 bar).
    - If a bead is not completely seated at this point, deflate the tyre, break the beads away from the rim, rotate the tyre 90° and re-lubricate the beads and the rim, and repeat steps 3 through 7 above.
12. Use proper inflation pressure. Never under inflate or over inflate the tyres. Never inflate an agricultural tyre over 35 psi (2.4 bar) to seat the beads.

BALLASTING

To achieve better traction and to enhance performance, the tyres are often ballasted.

Ballasting can be done in two ways:

1. Inserting substances inside the tyre.
2. Attaching counter weights to the back of the vehicle.

Since the second method involves welding or bolting weights to the back of the vehicles, many operators choose the first method of tyre ballasting. This practice is used to enhance the performance of front-end loaders, motor graders or grader tractors. Ballasting helps keep the rear tyres of the front-end loaders grounded.

Ballasting is usually done by filling tyre with water. In cold climatic conditions, anti freezing substances like Calcium Chloride (80%) or Magnesium Chloride (47%) can be added.

Ballasting tyres with a liquid

Agricultural tyre valves are of the “air and water type”. Therefore, filling up to a maximum of 75% (Diagram 1), with liquid (water + antifreeze) is possible.

In winter, as temperatures may fall below zero, a glycol-based antifreeze product should be used.
With the air water valve at the top, fill the inner tube or tubeless tyre up to the height of the valve, while allowing the air to escape (Diagram 2).

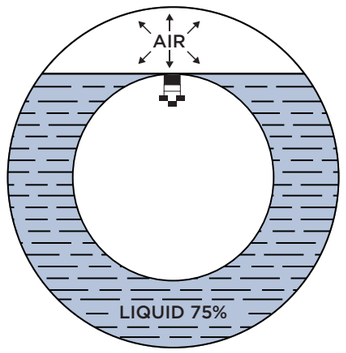

DIAGRAM 1

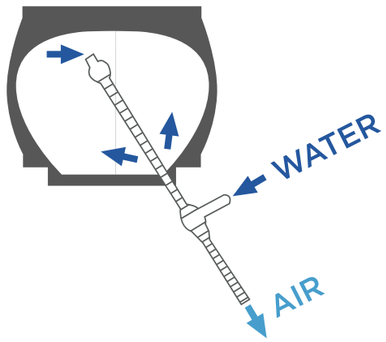

DIAGRAM 2

Inflation and pressure are adjusted to the air. Since the volume of air responsible for pressure is low (around 25% of the volume), regular monitoring of the tyre pressure is essential. We recommend verification on a monthly basis.
However, the following points must be taken into consideration while using tyre ballasting practice:

- Before rotating ballasted tyres, the ballasting solution (liquid) or material (dry) must be removed and properly disposed off.

- Ballasting solution can facilitate rim rust. The rim should be well painted or the solution must contain rust prohibitive ingredients.

Demounting

1. Follow the reverse process of mounting to demount the tyre from rim.
2. Tyres with a pry notch above the bead should be lubricated at the notch before pushing the bead away from the rim flange.
3. Lubricate around the bead circumference as it is worked away from the flange.
4. Lubricate the back bead and the rim flange during dismounting.

DEFINITION OF TERMS

Agricultural Tractor
Self-propelled agricultural vehicle having at least two axles and wheels, or endless tracks, particularly designed to pull agricultural trailers and pull, push, carry and operate implements used for agricultural work (including forestry work), which may be provided with a detachable loading platform.
The agricultural vehicle has a maximum design speed of not less than 6 kmph and may be equipped with one or more seats.

Two-wheel drive tractor (2WD)
Agricultural tractor with traction power provided only through the rear tyres. The front tyres are smaller than the rear and typically use a profile type with no traction capability.

Four-wheel drive tractor with equal sized wheels (4WD)
All-wheel drive tractor with equal sized wheels and having power to both axles

Compact utility tractor
Agricultural tractor equipped with a 540-rpm rear PTO and a three-point hitch designed for Category I implements only.
These tractors generally have a mass less than 1800 kg; have less than 30 PTO kW, and are primarily designed and advertised for use with mowers and light-duty material handling equipment. The rear PTO and hitch categories are defined by ISO 500 1 and ISO 730, respectively.

IMPORTANT PARAMETERS FOR MAXIMUM TYRE LIFE

Following are some important parameters needed to be monitored in order to get maximum tyre life:

- To obtain maximum tyre life, operate within the recommended load inflation pressure schedule.
- Sufficient tyre to vehicle clearance
- Removal of rocks and debris trapped between dual tyres, or between tyre and the vehicle, or in the grooves of the tyre.
- Proper matching of dual tyres that is the inflated diameters of both the tyres should match.
- Keep the tyres free from oil, grease, etc.
- To keep proper tyre performance record check:
  1. Brand and serial no.
  2. New tyre tread depth
  3. Original and subsequent installations and removals by unit number and position
  4. Final disposition - scrap, repair, retread, total hours or miles of service and date of removal
- Thorough and accurate record keeping helps in determination of problem areas causing failures.
- Proper attention to be given for vehicle mechanical irregularities such as misalignment, improperly adjusted brakes or defective brake drums etc., which have damaging effect on tyres.
- Proper checking & maintenance of rims or wheels and valves.
- Proper storage of tyres. Tyres should be stored in cool and dark places, free from dirt, oil or sunlight and as far as possible, from running electric motors (as these generate ozone which deteriorates rubber.)
- Prompt repair of service damaged tyres. There are usually three major types of cuts or damage which occur in tyres.
- Tread surface cuts - these types of cuts might look minor, but they have a tendency to pick up and hold stones. If the stones are not removed, they can work their way into the carcass, resulting in tyre failure.
- Cuts through the tread - damage from this type of injury may lead to premature tyre failure. When it is determined that the carcass of the tyre has been damaged, the tyre should be removed from service immediately and sent to a qualified repair facility.
- Sidewall cuts - these are repairable, depending on the location and extent of damage.

PROPER HANDLING AND TRANSPORTING TYRES

While transporting tyres, particular care must be taken to ensure that the beads and inner liner of the tyre are not damaged. Damage of even a minor nature could result in premature tyre failure due to air seeping into the body of the tyre, causing a separation.

CORRECT

INCORRECT

GOOD BAD BAD

PROPER STORAGE:

- Do not store tyres for longer periods.
- Tyres/tubes must not get exposed to direct sunlight during storage.
- Storage area must be free from dirt and oils and away from electric engines.

SAFETY PRECAUTIONS

1. NEVER re-inflate a tyre that has been in a run-flat or underinflated condition (80% or less of recommended pressure).
2. ALWAYS use specialised tools as recommended by the tyre suppliers for mounting and demounting the tyres.
3. BEFORE loosening any nuts or clamps that attach a multi-piece rim assembly to a vehicle, always completely deflate the tyre (both tyres of a dual assembly) by taking out the valve core(s). Never attempt to demount a tyre from a rim unless you are sure that the tyre is completely deflated. Failure to follow this practice can cause the assembly to burst with force, sufficient to cause serious injury or death.
4. NEVER use any rim part that is bent, pitted from corrosion, cracked or worn. These are unserviceable parts and must be destroyed so that they cannot be used. Remove rust, dirt or foreign material from rim parts.
5. NEVER use a rim part unless you can positively identify it from the manufacturer's stamped markings. If you cannot identify a part, it must be destroyed.
6. ALWAYS inspect inside of a tyre for loose cords, cuts, penetrating objects or other casing damage. Repairable damage must be repaired by trained personnel before placing the tyre back into service. Tyres with irreparable damage should be destroyed.
7. NEVER substitute an inner tube for a permissible or non-permissible repair.
8. ALWAYS replace a tyre with one having the same rim diameter designation and suffix letters.
9. ALWAYS inspect the inside of a tyre and remove dirt, liquids or other foreign material before mounting.
10. NEVER install tubes that have buckled or been creased.
11. ALWAYS use radial tubes with radial tyres.
12. ALWAYS use new tubes with new tyres.
13. NEVER use a tube in a casing larger or smaller than that for which the tube was designed by the manufacturer.
14. ALWAYS check to be sure that the tube is clean before installing in the tyre.

15. ALWAYS lubricate with only approved tyre mounting lubricants or mild vegetable oil, or soap solution. Never use antifreeze, silicones or petroleum-based lubricants. This will damage the tyre.

16. ALWAYS inspect the valve cores for proper air retention. Replace damaged or leaky cores.

17. ALWAYS inflate tyres to tyre manufacturer's recommended cold inflation pressure for the tyre's intended service.

18. When inflating a tyre not on a vehicle, use a safety cage or other restraining device, and an extension hose with in-line air gauge and clip-on air chuck, which allows the operator to stand clear of the trajectory.

19. For tube-type tyres, inflate to service pressure without the valve core installed and then completely deflate the tyre to prevent wrinkles in the tube. Insert the valve core and re-inflate the tyre to recommended service pressure as specified for the tyre and rim.

20. ALWAYS use sealing valve caps to prevent loss of air or fluid.

LIMITED WARRANTY POLICY

CEAT AGRI RADIALS

TYRES COVERED

This limited warranty covers CEAT-branded Agricultural radial tyres which are sold in Europe, Australia, New Zealand and African markets, manufactured on or after April 1, 2017 and meet the following criteria:

1. Tyres bear the name “CEAT” and the complete date code or serial number molded on the sidewall.
2. Tyres are not more than 7 years old from the date of invoice (dealer’s invoice to the end user) or from the month of production in case of non-availability of invoice.
3. Tyres have a minimum of 4mm of centreline tread depth remaining.
4. Tyres were used strictly in accordance with the recommendation of the applicable vehicle manufacturer and CEAT standard usage, maintenance and safety recommendations, in normal agricultural service.

SCOPE OF WARRANTY - REMEDIES

CEAT will only provide a credit as described below against the price of a new CEAT-branded tyre, for eligible tyres experiencing the following failures:

Workmanship and Materials Defects

If the tyre becomes unserviceable, unrepairable or unsafe due to a defect in materials or workmanship of the tyre, the credit will be equal to the applicable percentage of the price of the warranted tyre to the distributor, as set forth in the following table:

Tyre will be replaced by giving 100% credit in case of a failure within 2 years & not more than 25% wear provided both the conditions are satisfied.

Period From the Invoice Date) /Date of production)	% Wear	% Credit
Up to 2 years	25% or less	FOC
	26% to 85%	Pro Rata
	>85%	15%
3rd year - 5th year	Up to 85% wear	Pro Rata
	>85% wear	15%
6th year - 7th year	Up to 85% wear	Pro Rata
	>85% wear	10%

The above remedies are available only to the original end-use purchaser, and the purchaser is responsible for all applicable taxes, and for charges for mounting, demounting, field service & any other incidental costs, including applicable freight, with respect to the replacement tyre and the warranted tyre. All failed tyres will be disabled, and the date code or serial number will be removed. The purchaser will be responsible for the disposal of all failed tyres.

Any defects established by CEAT’s personnel will only qualify for credit.

Warranty ceases once the tyres are repaired.

LIMITATION OF LIABILITY

Any applicable credit as provided above will be CEAT's only liability, and the purchaser's only remedy, for any tyre failure. CEAT will have no responsibility for loss of use, revenue or anticipated profits, or for any other incidental or consequential damages, whether for breach of warranty or other contract, negligence, strict liability or under other tort theories.

OTHER WARRANTIES

CEAT makes no warranty on its agricultural radial tyres sale in the Europe, Australia, New Zealand and African Markets other than the warranty set forth above. This warranty is in lieu of all other warranties, express and implied. There is no warranty of merchantability or fitness for any particular purpose on this product. No agent or employee of CEAT is authorized to extend any other warranty or assume for CEAT any warranty except this warranty. This warranty is given only to the original end-use purchaser.

FAILURES NOT COVERED

This warranty does not cover:

1. Any tyre that fails or is damaged due to mechanical irregularity of the vehicle, improper installation, fire, accident or improper wheel and rim assembly.
2. Tyres that fail due to excess speed, overload, driving contests, pulling contests, competitive driving, logging or any other unauthorized applications.
3. Tyres that are put in service and that are not in full accordance with the intended use of the vehicle and the recommendations of the vehicle manufacturer/tyre manufacturer.
4. Broken or damaged beads due to improper mounting or demounting.
5. Rapid tread wear, irregular wear or failure resulting from use of mismatched/damaged/repaired rim, misalignment, improper wheel assembly, spinning of the tyre.
6. Damage caused by neglect, abuse or by mismatching of adjacent tyres, misalignment, run-flat, improper inflation, improper operation of vehicle, excess speed, overloading, improper repair, insertion of sealant, or petroleum damage, etc.
7. Damage due to improper storage, chain damage, failure in extreme weather conditions, damage due to alteration of appearance or structure of tyre, and the like.
8. Tyres that are retreaded/hot repaired/full service rendered/uneven wear/rapid tread wear.
9. Tyres that have been modified (added buttress shoulders/retreading/regrooving).

OTHER INFORMATION

While every care is taken to manufacture the tyre to high standards, the tyres may still fail in service or become unserviceable on account of factors or conditions beyond the control of the manufacturer.

Disclaimer – The tyres under the brand name of CEAT are being manufactured and warranted by CEAT Specialty Tyres Limited (herein after referred to as CSTL, a company incorporated under the laws of India) and all the rights and liabilities will be settled by thereto by CSTL.

CLAIM FORM

CUSTOMER NAME: _____

ADDRESS: _____

PHONE & EMAIL: _____

TYRE SIZE: _____ PLYRATING: _____

DATE CODE: _____ BRAND NAME:

_____

WHEEL POSITION: _____

TREAD DEPTH (NEW): _____

TREAD DEPTH (REMAINING): _____

DEALER NAME: _____

ADDRESS: _____

PHONE & EMAIL: _____

INSTALLATION DATE: _____ REMOVAL DATE: _____

NO OF HOURS RUN: _____

TYPE OF EQUIPMENT: _____

_____MAKE: _____ MODEL:

_____APPLICATION: _____

_____

AIR PRESSURE:_____

DESCRIPTION OF FAILURE:_____

WARRANTY CLAIMS

Requirements for submitting warranty claims.
Submit the following to any CEAT distributor/dealer:

1. Electronic photos in JPG format for each tyre claimed.
   - A. Picture of the sidewall showing size, brand, load index and any other distinguishing information on the tyre.
   - B. Picture of the tread.
   - C. Picture of the date code or serial number.
   - D. Pictures of the failed area from exterior as well as interior view if possible
2. Completed CEAT claim form.

SKU CODE INDEX

RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SI	RCI	PAGE NO.
1	106246	250/85 R 20	FARMAX R85	116A8/B	33	21
2	104902	280/85 R 20	FARMAX R85	112A8/B	34	21
3	105245	320/85 R 20	FARMAX R85	119A8/B	35	21
4	104901	250/85 R 24	FARMAX R85	109A8/B	35	21
5	104903	280/85 R 24	FARMAX R85	115A8/B	36	21
6	104905	320/85 R 24	FARMAX R85	122A8/B	37	22
7	105895	320/85 R 24	FARMAX R85	142A8/B	37	22
8	104874	340/85 R 24	FARMAX R85	125A8/B	37	22
9	104876	380/85 R 24	FARMAX R85	131A8/B	38	22
10	104908	420/85 R 24	FARMAX R85	137A8/B	39	22
11	105983	250/85 R 28	FARMAX R85	112A8/B	37	23
12	104904	280/85 R 28	FARMAX R85	118A8/B	37	23
13	105655	320/85 R 28	FARMAX R85	124A8/B	38	23
14	104875	340/85 R 28	FARMAX R85	127A8/B	39	23
15	104877	380/85 R 28	FARMAX R85	133A8/B	40	23
16	104909	420/85 R 28	FARMAX R85	139A8/B	41	24
17	104907	380/85 R 30	FARMAX R85	135A8/B	41	24
18	104910	420/85 R 30	FARMAX R85	140A8/B	41	24
19	105860	420/85 R 30	FARMAX R85	147A8/B	41	24
20	104913	460/85 R 30	FARMAX R85	145A8/B	42	24
21	105246	320/85 R 32	FARMAX R85	126A8/B	40	25
22	105941	320/85 R 32	FARMAX R85	142A8/B	40	25
23	105656	320/85 R 34	FARMAX R85	141A8	41	25
24	105241	380/85 R 34	FARMAX R85	137A8/B	42	25
25	104911	420/85 R 34	FARMAX R85	142A8/B	43	25
26	105338	420/85 R 34	FARMAX R85	147A8/B	43	26
27	104914	460/85 R 34	FARMAX R85	147A8/B	44	26
28	105340	460/85 R 34	FARMAX R85	157A8/B	44	26
29	105247	320/85 R 36	FARMAX R85	128A8/B	41	26
30	105244	340/85 R 36	FARMAX R85	132A8/B	42	26
31	105690	320/85 R 38	FARMAX R85	143A8/B	42	27
32	104906	340/85 R 38	FARMAX R85	133A8/B	43	27
33	105942	340/85 R 38	FARMAX R85	148A8/B	43	27
34	104912	420/85 R 38	FARMAX R85	144A8/B	44	27
35	104915	460/85 R 38	FARMAX R85	149A8/B	45	27
36	105341	460/85 R 38	FARMAX R85	167A8/B	45	28
37	104916	520/85 R 38	FARMAX R85	155A8/B	46	28

RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SI	RCI	PAGE NO.
38	105657	520/85 R 38	FARMAX R85	169A8/B	46	28
39	105242	520/85 R 42	FARMAX R85	157A8/B	47	28
40	105339	520/85 R 42	FARMAX R85	169A8/B	47	28
41	105243	520/85 R 46	FARMAX R85	158A8/B	48	29
42	105658	520/85 R 46	FARMAX R85	174A8/B	48	29
43	105333	380/80 R 38	FARMAX R80	142A8/B	43	30
44	106251	380/80 R 38	FARMAX R80	152A8/B	43	30
45	106458	420/80 R 46	FARMAX R80	151D/154A8	46	30
46	106459	420/80 R 46	FARMAX R80	159D/162A8	46	30
47	105262	480/80 R 42	FARMAX R80	151A8/B	46	30
48	105263	480/80 R 46	FARMAX R80	158A8/B	47	30
49	105325	260/70 R 20	FARMAX R70	113A8/B	32	31
50	105334	280/70 R 20	FARMAX R70	116A8/B	32	31
51	105261	300/70 R 20	FARMAX R70	110A8/B	33	31
52	105406	300/70 R 20	FARMAX R70	120A8/B	33	31
53	105248	320/70 R 20	FARMAX R70	113A8/B	34	31
54	105257	320/70 R 20	FARMAX R70	123A8/B	34	32
55	105253	360/70 R 20	FARMAX R70	120A8/B	35	32
56	105266	360/70 R 20	FARMAX R70	129A8/B	35	32
57	105258	380/70 R 20	FARMAX R70	122A8/B	35	32
58	105267	380/70 R 20	FARMAX R70	132A8/B	35	32
59	105249	320/70 R 24	FARMAX R70	116A8/B	36	33
60	105254	360/70 R 24	FARMAX R70	122A8/B	37	33
61	105259	380/70 R 24	FARMAX R70	125A8/B	37	33
62	105268	420/70 R 24	FARMAX R70	130A8/B	38	33
63	105270	480/70 R 24	FARMAX R70	138A8/B	39	33
64	105250	320/70 R 28	FARMAX R70	119A8/B	38	34
65	105255	360/70 R 28	FARMAX R70	125A8/B	38	34
66	105260	380/70 R 28	FARMAX R70	127A8/B	39	34
67	105269	420/70 R 28	FARMAX R70	133A8/B	40	34
68	105271	480/70 R 28	FARMAX R70	140A8/B	41	34
69	105943	480/70 R 28	FARMAX R70	151A8/B	41	35
70	105984	600/70 R 28	FARMAX R70	161A8/B	42	35
71	105322	420/70 R 30	FARMAX R70	134A8/B	40	35
72	105272	480/70 R 30	FARMAX R70	141A8/B	41	35
73	105659	480/70 R 30	FARMAX R70	147D/150A8	41	35
74	105326	520/70 R 30	FARMAX R70	145A8/B	42	36
75	105660	600/70 R 30	FARMAX R70	152A8/B	43	36

RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SI	RCI	PAGE NO.
76	105273	480/70 R 34	FARMAX R70	143A8/B	43	36
77	105944	480/70 R 34	FARMAX R70	149A8/B	43	36
78	105661	520/70 R 34	FARMAX R70	148A8/B	44	36
79	105662	480/70 R 38	FARMAX R70	145A8/B	44	37
80	105327	520/70 R 38	FARMAX R70	150A8/B	45	37
81	105342	580/70 R 38	FARMAX R70	155A8/B	46	37
82	105663	710/70 R 38	FARMAX R70	172A/B	47	37
83	105664	710/70 R 38	FARMAX R70	178A/B	47	37
84	106394	580/70 R42	FARMAX R70	158 A8/B	46	37
85	106457	620/70 R42	FARMAX R70	166 A8/B	47	37
86	106416	620/70 R42	FARMAX R70	173 A8/B	47	37
87	106245	710/70 R 42	FARMAX R70	173A/B	48	38
88	106492	270/ 95 R 54	FARMAX R70	146D/ 149A8	46	38
89	106247	420/90 R 30	FARMAX R90	147A/B	42	38
90	105986	340/65 R 20	FARMAX R65	124D	33	40
91	105987	420/65 R 20	FARMAX R65	135D	35	40
92	105988	440/65 R 20	FARMAX R65	138D	36	40
93	105982	420/65 R 24	FARMAX R65	138D	38	40
94	105666	440/65 R 24	FARMAX R65	135D	37	40
95	105945	440/65 R 24	FARMAX R65	135D	37	41
96	105256	480/65 R 24	FARMAX R65	133D	38	41
97	105939	480/65 R 24	FARMAX R65	140D	38	41
98	105332	540/65 R 24	FARMAX R65	140D	39	41
99	105670	540/65 R 24	FARMAX R65	146D	39	41
100	105667	440/65 R 28	FARMAX R65	138D	39	42
101	105408	480/65 R 28	FARMAX R65	136D	40	42
102	105940	480/65 R 28	FARMAX R65	142D	40	42
103	105251	540/65 R 28	FARMAX R65	142D	41	42
104	105671	540/65 R 28	FARMAX R65	149D	41	42
105	105985	600/65 R 28	FARMAX R65	147D	42	43
106	105668	600/65 R 28	FARMAX R65	154D	42	43
107	105335	540/65 R 30	FARMAX R65	143D	41	43
108	105672	540/65 R 30	FARMAX R65	150D	41	43
109	105989	600/65 R 30	FARMAX R65	149D	42	43
110	105336	540/65 R 34	FARMAX R65	145D	43	44
111	105673	540/65 R 34	FARMAX R65	152D	43	44
112	105337	600/65 R 34	FARMAX R65	151D	44	44
113	105675	600/65 R 34	FARMAX R65	157D	44	44

RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SI	RCI	PAGE NO.
114	105669	540/65 R 38	FARMAX R65	147D	44	44
115	105674	540/65 R 38	FARMAX R65	153D	44	45
116	105409	600/65 R 38	FARMAX R65	153D	45	45
117	105252	650/65 R 38	FARMAX R65	157D	46	45
118	105676	650/65 R 38	FARMAX R65	163D	46	45
119	105407	650/65 R 42	FARMAX R65	158D	47	45
120	105677	650/65 R 42	FARMAX R65	165D	47	46
121	106257	650/65 R 42	FARMAX R65	170D	47	46
122	106453	600/70 R 30	TORQUEMAX	165 D	43	49
123	106455	600/70 R 34	TORQUEMAX	160 D	44	49
124	106456	600/70 R 34	TORQUEMAX	167 D	44	49
125	106410	520/85 R 38	TORQUEMAX	167 D	46	49
126	106374	650/85 R 38	TORQUEMAX	170AD / 173A8	48	50
127	106375	650/85 R 38	TORQUEMAX	173D / 176A8	48	50
128	105684	210/95 R 32	FARMAX RC	117D/120A8	38	48
129	105685	230/95 R 32	FARMAX RC	128D/131A8	38	48
130	105686	270/95 R 32	FARMAX RC	133D/136A8	40	48
131	105687	230/95 R 36	FARMAX RC	127D/130A8	40	48
132	106248	230/95 R 36	FARMAX RC	130D/133A8	40	48
133	105688	270/95 R 36	FARMAX RC	136D/139A8	41	48
134	105689	270/95 R 38	FARMAX RC	137D/140A8	41	49
135	106249	270/95 R 38	FARMAX RC	140D/143A8	41	49
136	106249	270/95 R38	FARMAX RC	139D/142A8	43	49
137	106371	230/95 R 40	FARMAX RC	132D / 135A8	40	53
138	106372	230/95 R 42	FARMAX RC	133D/136A8	41	53
139	105691	270/95 R 42	FARMAX RC	137D/140A8	43	49
140	105328	320/80 R 42	FARMAX RC	141A8/B	43	49
141	105692	320/90 R42	FARMAX RC	136D/139A8	44	49
142	105981	320/90 R42	FARMAX RC	144D/147A8/B	44	50
143	105693	230/95 R 44	FARMAX RC	129D/132A8	43	50
144	105694	230/95 R 44	FARMAX RC	134D/137A8	43	50
145	105695	270/95 R 44	FARMAX RC	140D/143A8	44	50
146	106280	270/95 R 44	FARMAX RC	142D/145A8	43	50
147	105698	340/85 R 46	FARMAX RC	147D/150A8	45	50
148	106250	380/90 R 46	FARMAX RC	159D/162A8	46	51
149	105329	380/90 R 46	FARMAX RC	165A8/B	46	51
150	105696	270/95 R 46	FARMAX RC	141D/144A8	44	51

RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SI	RCI	PAGE NO.
151	105330	300/95 R 46	FARMAX RC	143D/146A8	45	51
152	105697	300/95 R 46	FARMAX RC	148D/151A8	45	51
153	105323	230/95 R 48	FARMAX RC	136D/139A8	44	52
154	105324	270/95 R 48	FARMAX RC	142D/145A8	45	52
155	105331	340/85 R 48	FARMAX RC	148D/151A8	45	52
156	106412	320/90 R 50	FARMAX RC	150D/153A8	46	57
157	106413	380/90 R 50	FARMAX RC	151D/154A8	47	57
158	106414	380/90 R 50	FARMAX RC	158D/161A8	47	57
159	106492	270/95 R 54	FARMAX RC	146D/ 149A8	46	58
160	106479	300/95 R 52	FARMAX RC	149D/ 152A8	46	58
161	106395	620/75 R 26	YIELDMAX	166A8/B	43	66
162	106373	650/75 R 32	YIELDMAX	172A8/B	46	66
163	105343	560/45 R 22.5	FLOATMAX FT	152D	36	73
164	105702	560/60 R 22.5	FLOATMAX FT	161D	-	73
165	105703	600/50 R 22.5	FLOATMAX FT	159D	-	73
166	105265	600/55 R 26.5	FLOATMAX FT	165D	40	73
167	105345	460/70 R 24	LIFT PRO	159A8/B	38	89

BIAS

Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
1	102881	5.00-15	FARMAX F2	4	TT	54
2	102882	5.50-16	FARMAX F2	6	TT	54
3	102883	6.00-16	FARMAX F2	6	TT	54
4	102884	6.50-16	FARMAX F2	6	TT	54
5	102885	7.50-16	FARMAX F2	8	TT	54
6	102695	10.00-16	FARMAX F2	8	TT	54
7	102696	11.00-16	FARMAX F2	8	TT	54
8	102886	7.50-18	FARMAX F2	8	TT	54
9	102887	4.00-19	FARMAX F2	4	TT	54
10	102888	7.50-20	FARMAX F2	8	TT	54
11	103521	9.5L-15SL	FARMAX F2M	8	TL	56
12	103522	11L-15SL	FARMAX F2M	8	TL	56
13	103523	10.00-16SL	FARMAX F2M	8	TL	56
14	103524	11.00-16SL	FARMAX F2M	8	TL	56
15	100280	6.00-16	SAMRAAT F2	8	TT	57
16	100976	#6.00-16	SAMRAAT F2	8	TT	57
17	100342	7.50-16	SAMRAAT F2	8	TT	57
18	101538	#7.50-16	SAMRAAT F2	8	TT	57
19	100294	6.50-20	SAMRAAT F2	6	TT	57
20	101476	6.00-16	AAYUSHMAAN F2	8	TT	58
21	102571	7.50-16	AAYUSHMAAN F2	8	TT	58
22	101797	6.50-20	AAYUSHMAAN F2	8	TT	58
23	102898	8.3-24	FARMAX R1	8	TT	60
24	102899	9.5-24	FARMAX R1	8	TT	60
25	102900	11.2-24	FARMAX R1	8	TT	60
26	102698	12.4-24	FARMAX R1	8	TT	60
27	103383	13.6-24	FARMAX R1	8	TT	60
28	102691	14.9-24	FARMAX R1	8	TT	60
29	102704	16.9-24	FARMAX R1	8	TT	60
30	102692	18.4-26	FARMAX R1	12	TT	60

BIAS

Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
31	102703	11.2-28	FARMAX R1	8	TT	60
32	102901	12.4-28	FARMAX R1	8	TT	60
33	102902	13.6-28	FARMAX R1	8	TT	61
34	102699	14.9-28	FARMAX R1	8	TT	61
35	102700	16.9-28	FARMAX R1	12	TT	61
36	102701	16.9-30	FARMAX R1	10	TT	61
37	102693	18.4-30	FARMAX R1	12	TT	61
38	103008	18.4-34	FARMAX R1	8	TT	61
39	102702	18.4-34	FARMAX R1	12	TT	61
40	102706	13.6-36	FARMAX R1	8	TT	61
41	102697	13.6-38	FARMAX R1	8	TT	61
42	102694	15.5-38	FARMAX R1	8	TT	61
43	103004	15.5-38	FARMAX R1	10	TT	61
44	102705	16.9-38	FARMAX R1	8	TT	61
45	103006	16.9-38	FARMAX R1	10	TT	61
46	103009	18.4-38	FARMAX R1	8	TT	61
47	102707	18.4-38	FARMAX R1	12	TT	61
48	100144	16.9-28	SAMRAAT PLUS R1	12	TT	62
49	101419	#16.9-28	SAMRAAT PLUS R1	12	TT	62
50	101321	9.5-24	SAMRAAT SUPER R1	8	TT	63
51	100072	12.4-24	SAMRAAT SUPER R1	8	TT	63
52	100073	#12.4-24	SAMRAAT SUPER R1	8	TT	63
53	100074	12.4-28	SAMRAAT SUPER R1	12	TT	63
54	100574	#12.4-28	SAMRAAT SUPER R1	12	TT	63
55	100110	13.6-28	SAMRAAT SUPER R1	12	TT	63
56	100111	#13.6-28	SAMRAAT SUPER R1	12	TT	63
57	100832	14.9-28	SAMRAAT SUPER R1	12	TT	63
58	101545	14.9-28	SAMRAAT SUPER R1	12	TT	63
59	101790	11.2-24	AAYUSHMAAN R1	8	TT	64
60	101475	12.4-28	AAYUSHMAAN R1	12	TT	64

*Sizes are available only in Altura

BIAS

Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
61	101594	13.6-28	AAYUSHMAAN R1	12	TT	64
62	101709	14.9-28	AAYUSHMAAN R1	12	TT	64
63	101611	16.9-28	AAYUSHMAAN R1	12	TT	64
64	104695	15.5-38	AAYUSHMAAN R1	10	TT	64
65	105613	15.5-38	AAYUSHMAAN R1	12	TT	64
66	105652	15.5-38	AAYUSHMAAN R1	14	TT	64
67	101486	12.4-28	AAYUSHMAAN R2	12	TT	65
68	100175	18.4-30	HARVESTER SAMRAAT SUPER XL	14	TT	68
69	100176	#18.4-30	HARVESTER SAMRAAT SUPER XL	14	TT	68
70	104696	16.9-30	HARVESTER AAYUSHMAAN	12	TT	69
71	105127	16.9-30	HARVESTER AAYUSHMAAN	14	TT	69
72	105645	#16.9-30	HARVESTER AAYUSHMAAN	14	TT	69
73	101697	18.4-30	HARVESTER AAYUSHMAAN	14	TT	69
74	103685	18.4-30	AAYUSHMAAN HD	14	TT	69
75	103953	500/50-17	FLOTATION T422	16	TL	75
76	105129	500/50-17	FLOTATION T422	18	TL	75
77	100867	#700/40-22.5	FLOTATION T422	12	TL	75
78	103176	700/40-22.5	FLOTATION T422	16	TL	75
79	100258	#550/45-22.5	FLOTATION T422	12	TL	75
80	102833	550/45-22.5	FLOTATION T422	16	TL	75
81	103141	550/45-22.5	FLOTATION T422	20	TL	75
82	100865	#700/50-22.5	FLOTATION T422	12	TL	75
83	103175	700/50-22.5	FLOTATION T422	16	TL	75
84	103479	500/60-22.5	FLOTATION T422	16	TL	75
85	100268	#600/50-22.5	FLOTATION T422	12	TL	75
86	102417	600/50-22.5	FLOTATION T422	16	TL	75
87	100260	#550/60-22.5	T422 VALUE PRO	12	TL	75
88	103602	550/60-22.5	T422 VALUE PRO	16	TL	75
89	103792	#550/60-22.5	FLOTATION T422	12	TL	75

BIAS

Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
90	102836	550/60-22.5	FLOTATION T422	16	TL	75
91	100270	#600/55-22.5	FLOTATION T422	12	TL	75
92	103177	600/55-22.5	FLOTATION T422	16	TL	75
93	100868	#700/50-26.5	FLOTATION T422	12	TL	75
94	103181	700/50-26.5	FLOTATION T422	16	TL	75
95	100273	#600/55-26.5	FLOTATION T422	12	TL	75
96	103261	600/55-26.5	FLOTATION T422	16	TL	75
97	100862	800/45-26.5	FLOTATION T422	12	TL	75
98	102841	800/45-26.5	FLOTATION T422	16	TL	75
99	103951	400/55-22.5	T422 VALUE PRO	16	TL	77
100	103952	500/45-22.5	T422 VALUE PRO	16	TL	77
101	103603	500/60-22.5	T422 VALUE PRO	16	TL	77
102	103604	550/45-22.5	T422 VALUE PRO	16	TL	77
103	103602	550/60-22.5	T422 VALUE PRO	16	TL	77
104	103604	550/45-22.5	T422 VALUE PRO	16	TL	77
105	103794	#550/45-22.5	T422 VALUE PRO	16	TL	77
106	103602	550/60-22.5	T422 VALUE PRO	16	TL	77
107	103792	#550/60-22.5	T422 VALUE PRO	16	TL	77
108	102835	400/60-15.5	TR800	14	TL	78
109	105128	400/60-15.5	TR800	18	TL	78
110	103274	480/45-17	FLOTATION PLUS	16	TL	79
111	101775	500/50-17	FLOTATION PLUS	14	TL	79
112	104862	500/60-22.5	FLOTATION TX 440	16	TL	80
113	104840	550/60-22.5	FLOTATION TX 440	16	TL	80
114	104861	600/50-22.5	FLOTATION TX 440	16	TL	80
115	104863	700/40-22.5	FLOTATION TX 440	16	TL	80
116	105234	7.60-15 SL	FARM IMPLEMENT I1	10	TL	82
117	101146	9.5L-15 SL	FARM IMPLEMENT I1	8	TT	82
118	101145	9.5L-15 SL	FARM IMPLEMENT I1	8	TL	82

#Sizes are available only in Altura

#Sizes are available only in Altura

BIAS

Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
119	102889	9.5L-15 SL	FARM IMPLEMENT I1	12	TT	82
120	102890	9.5L-15 SL	FARM IMPLEMENT I1	12	TL	82
121	100573	11L-15SL	FARM IMPLEMENT I1	8	TT	82
122	101147	11L-15SL	FARM IMPLEMENT I1	8	TL	82
123	102891	11L-15SL	FARM IMPLEMENT I1	10	TT	82
124	102892	11L-15SL	FARM IMPLEMENT I1	10	TL	82
125	102893	11L-15SL	FARM IMPLEMENT I1	12	TT	82
126	102894	11L-15SL	FARM IMPLEMENT I1	12	TL	82
127	102895	12.5L-15 SL	FARM IMPLEMENT I1	10	TT	82
128	102896	12.5L-15 SL	FARM IMPLEMENT I1	10	TL	82
129	102897	12.5L-15 SL	FARM IMPLEMENT I1	12	TL	82
130	103594	10.0/75-15.3	FARM IMPLEMENT AWI305	12	TL	83
131	103595	11.5/80-15.3	FARM IMPLEMENT AWI305	14	TL	83
132	106266	12.5/80-15.3	FARM IMPLEMENT AWI305	12	TT	79
133	105429	15.0-17	FARM IMPLEMENT 404	14	TL	84
134	105430	500/50-17	FARM IMPLEMENT 404	18	TL	84
135	100043	11.2-24	IRROGATOR	4	TT	86
136	103584	14.9-24	IRROGATOR	8	TT	86
137	103582	11.2-38	IRROGATOR	6	TT	86

OTR BIAS

Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
1	104361	15.5/80-24	LIFT PRO	16	TL	94
2	106141	18-19.5	MPT 503	16	TL	93
3	106142	18-22.5	MPT 503	16	TL	93
4	100075	#12.5-18	MPT 602	12	TL	96
5	100025	#10.00-20	MPT 602	16	TT	96
6	100076	#12.5-20	MPT 602	12	TL	96
7	101638	405/70-20 (16.0/70-20)	MPT 602	14	TL	96
8	106241	405/70-20 (16.0/70-20)	MPT 602	18	TL	95
9	101639	405/70-24 (16.0/70-24)	MPT 602	14	TL	96
10	105402	405/70-20	MPT 800	14	TL	97
11	105401	405/70-24	MPT 800	14	TL	97
12	104857	10-16.5	LOADER PRO	10	TL	98
13	104858	12-16.5	LOADER PRO	12	TL	98
14	105378	14-17.5	LOADER PRO HD	14	TL	99
15	105379	15-19.5	LOADER PRO HD	14	TL	99
16	106261	10-16.5	GRIPMASTER LOADER HD	10	TL	100
17	106262	12-16.5	GRIPMASTER LOADER HD	12	TL	100
18	106263	10-16.5	GRIP X HD	12	TL	101
19	106264	12-16.5	GRIP X HD	14	TL	101
20	100191	18.00-25	ROCK XL E4/L4	40	TL	104
21	100198	18.00-33	ROCK XL E4/L4	40	TL	104
22	101403	21.00-35	ROCK XL E4/L4	36	TL	104
23	101439	24.00-35	ROCK XL E4/L4	48	TL	104
24	100117	14.00-20	TRAC XL E3/L3	22	TT	105
25	100163	17.5-25	TRAC XL E3/L3	16	TL	105
26	100171	17.5-25	TRAC XL E3/L3	20	TT	105
27	100169	17.5-25	TRAC XL E3/L3	20	TL	105
28	100807	20.5-25	TRAC XL E3/L3	20	TT	105
29	104636	23.5-25	TRAC XL E3/L3	20	TT	105
30	101191	26.5-25	TRAC XL E3/L3	28	TL	105
31	103783	29.5-25	TRAC XL E3/L3	32	TL	105
32	101263	18.00-25	GRIP MASTER XL E4/L4	32	TL	106
33	100157	16.00-25	SLICK 431	32	TL	107
34	100089	12.00-20	SLICK 404	20	TT	108
35	100795	12.00-24	SLICK 404	20	TT	108
36	100168	17.5-25	SLICK 404	20	TL	108
37	100644	18.00-25	SLICK 404	40	TL	108
38	101714	23.1-26	C305 R3	10	TL	110
39	100218	23.1-26	C305 R3	12	TL	110

#Sizes are available only in Altura

OTR BIAS

Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
40	101209	23.1-26	C305 R3	16	TL	110
41	105130	12.5/80-18	TYROCK	12	TT	111
42	104961	12.5/80-18	TYROCK	12	TL	111
43	101295	16.9-28	TYROCK XL R4	12	TT	112
44	101306	19.5L-24	TYROCK XL R4	12	TL	112
45	100814	15.5-25	LOADER XL G2/L2	12	TL	113
46	100820	17.5-25	LOADER XL G2/L2	12	TL	113
47	100822	17.5-25	LOADER XL G2/L2	16	TL	113
48	100859	20.5-25	LOADER XL G2/L2	12	TL	113
49	100857	20.5-25	LOADER XL G2/L2	16	TL	113
50	104506	13.00-24	GRADER XL PLUS (G2/L2)	12	TT	114
51	105132	13.00-24	GRADER XL PLUS (G2/L2)	16	TT	114
52	100816	13.00-24	GRADER XL G2/L2	12	TL	115
53	100818	13.00-24	GRADER XL G2/L2	16	TL	115
54	100824	14.00-24	GRADER XL G2/L2	12	TL	115
55	100826	14.00-24	GRADER XL G2/L2	16	TL	115
56	101691	12.00-24	PORT PRO RX IND4	20	TT	118
57	101750	18.00-25	PORT PRO RX IND4	40	TL	118
58	102116	18.00-33	PORT PRO RX IND4	40	TL	118
59	101770	18.00-25	PORT PRO TX IND3	40	TL	119
60	101771	21.00-25	PORT PRO TX IND3	40	TL	119
61	101676	21.00-35	PORT PRO TX IND3	40	TL	119
62	102111	18.00-25	PORT PRO SL IND4	40	TL	120
63	101708	18.00-33	PORT PRO SL IND4	40	TL	120
64	100810	16.00-25	ROCK XL IND3	32	TL	121
65	101274	12.00-20	SLICK 404 L5S	20	TT	122
66	100592	12.00-24	SLICK 404 L5S	20	TT	122
67	100168	17.5-25	SLICK 404 L5S	20	TL	122
68	100644	18.00-25	SLICK 404 L5S	40	TL	122
69	100157	16.00-25	SLICK 431 L4S	32	TL	123
70	103922	18.00-25	PORT XL PLUS IND4.5	40	TL	124
71	100125	14.00-24	GRIP MASTER ND IND3	28	TT	125
72	104610	14.00-24	GRIP MASTER ND IND3	28	TL	125
73	100185	18.00-25	GRIP MASTER ND IND3	40	TL	125
74	101993	18.00-25	PORT PRO SL IND5	40	TL	126

RPG House, 463,
Dr. Annie Besant Road,
Worli, Mumbai – 400030
Email: info.cstl@ceat.com

10/2019