

MPT 602



FEATURE

Robust casing

BENEFIT

Better lateral stability


FEATURE

Superior tread compound

BENEFIT

Cut and chip resistance

MACHINERY

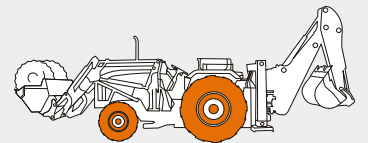

Multipurpose Tractor

Size	Rim Width in	Type	Unloaded dimension		Static Loaded Radius	Rolling Circumference	PR	Load/Speed Index	Load Carrying Capacity		
			SW	OD					Infl. Pressure	10 kmph	50 kmph
			mm	mm						Max Load	Max Load
			in	in					bar	kgs	kgs
405/70-24 (16.0/70-24)	13.00	TL	405	1180	547	3470	16	156 B	4.5	6400	4000
			15.9	46.8	21.5	136.6			65	14110	8820