

# SPRAYMAX

**FEATURE**

Higher NSD

**BENEFIT**

Longer life

**FEATURE**

Advanced VF technology

**BENEFIT**


40% more load carrying capability than a standard radial

**FEATURE**

Stepped lug design

**BENEFIT**

Better grip and traction

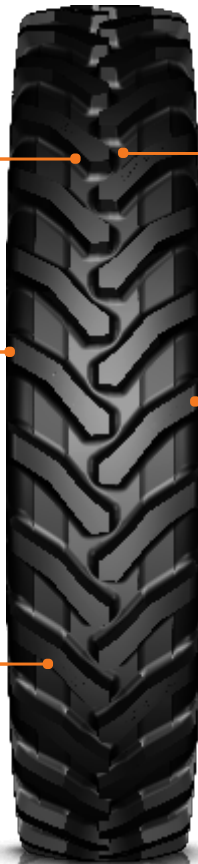

**FEATURE**

Advanced Lug Geometry

**BENEFIT**

Better roadability


**FEATURE**

Rounded shoulder

**BENEFIT**

Provides less soil and crop damage. Better grip

## MACHINERY

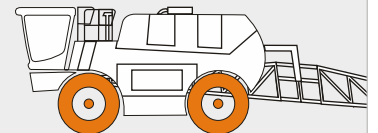

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index	Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD						MIXED APPLICATION				CYCLIC*	
			mm/in	mm/in						10	Up to 65 km/h	70	bar	10	
										6	Up to 40 km/h	43	psi	6	
VF 380/90R46	DW12 DW13	TL	383 15.1	1852 72.9	858 33.8	5586 219.9	173D		0.8	5410	2520	2350	2140	1.6	3290
									11	11920	5550	5180	4710	22.9	7250
									1.4	7660	3570	3330	3030	2.2	4660
									21	16870	7860	7330	6670	32.1	10260
									2.8	11520	5370	5010	4560	3.6	7010
									41	25370	11830	11040	10040	52.8	15440
									3.6	13200	6150	5740	5220	4.4	8040
									52	29070	13550	12640	11500	63.7	17710
									4.0	14080	6560	6120	5570	4.8	8570
									58	31010	14450	13480	12270	69.6	18880
									4.4	14950	6960	6500	5920	5.2	9100
									64	32930	15330	14320	13040	75.8	20040