

# SPRAYMAX

**FEATURE**

Higher NSD

**BENEFIT**

Longer life

**FEATURE**

Advanced VF technology

**BENEFIT**

40% more load carrying capability than a standard radial

**FEATURE**

Stepped lug design

**BENEFIT**

Better grip and traction



**FEATURE**

Advanced Lug Geometry

**BENEFIT**

Better roadability


**FEATURE**

Rounded shoulder

**BENEFIT**

Provides less soil and crop damage. Better grip

## MACHINERY

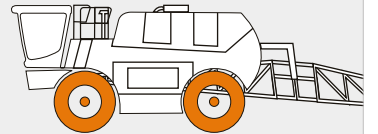

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)				
			SW	OD					MIXED APPLICATION		CYCLIC*		
			mm/in	mm/in					static	Up to 65 km/h Up to 40 km/h	70 43	bar psi	10 6
VF 480/ 80 R46	DW16 DW15	TL	479	1950	897	5838	177D	0.8	7660	3330	3000	1	4660
			18.9	76.8	35.3	229.8		12	16870	7330	6610	13.9	10260
								1	8720	3790	3410	1.2	5310
								15	19210	8350	7510	17.4	11700
								1.2	9710	4220	3800	1.4	5910
								17	21390	9300	8370	20.9	13020
								1.4	10630	4620	4160	1.7	6470
								20	23410	10180	9160	24.4	14250
								1.6	11500	5000	4500	1.9	7000
								23	25330	11010	9910	27.8	15420
								2.4	13250	5760	5180	2.9	8060
								35	29190	12690	11410	41.8	17750
								3	15090	6560	5900	3.6	9180
								44	33240	14450	13000	52.2	20220
								3.6	16790	7300	6570	4.3	10220
				52	36980	16080	14470	62.6	22510				