

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip

MACHINERY

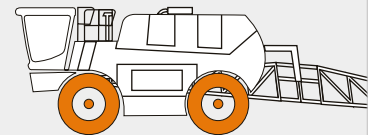

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD					MIXED APPLICATION				CYCLIC*	
			mm/in	mm/in					Up to 65 km/h	70	bar	10		
			mm/in	mm/in									Up to 40 km/h	43
VF 480 80R42	DW15 DW16	TL	479	1850	847	5550	176D	0.8	6670	2900	2640	0.9	4060	
			18.9	72.8	33.4	218.5		11	14690	6390	5810	13.6	8940	
								1.2	8580	3730	3390	1.4	5220	
								17	18900	8220	7470	20.9	11500	
								1.8	10930	4750	4320	2.2	6650	
								26	24070	10460	9520	31.6	14650	
								2	11570	5030	4580	2.4	7040	
								29	25480	11080	10090	34.8	15510	
								2.8	14100	6130	5580	3.4	8580	
								41	31060	13500	12290	48.7	18900	
								3.6	16330	7100	6460	4.3	9940	
								52	35970	15640	14230	62.6	21890	