

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT


40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction

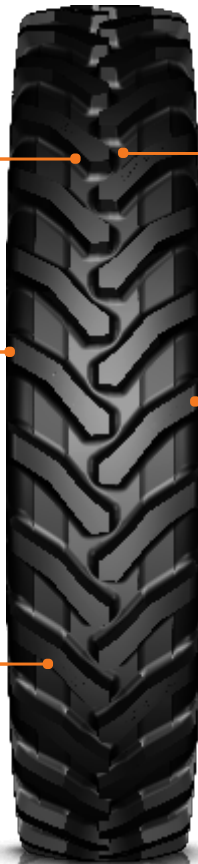

FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip

MACHINERY

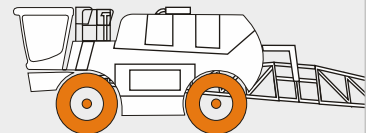

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD					MIXED APPLICATION				CYCLIC*	
			mm/in	mm/in					10	Up to 65 km/h	70	bar	10	
									6	Up to 40 km/h	43	psi	6	
VF 380/90R50	DW12 DW13	TL	383 15.1	1954 76.9	909 35.8	5850 230.3	175D	0.8	5840	2720	2540	2310	1.6	3560
								12	12860	5990	5590	5090	23.2	7840
								1.4	8140	3790	3540	3220	2.2	4960
								21	17930	8350	7800	7090	32.1	10930
								2.8	12240	5700	5320	4840	3.6	7450
								41	26960	12560	11720	10660	52.8	16410
								3.6	14030	6540	6100	5550	4.4	8540
								52	30900	14410	13440	12220	63.7	18810
								4.0	14950	6960	6500	5920	4.8	9100
								58	32930	15330	14320	13040	69.6	20040
								4.4	15870	7390	6900	6280	5.2	9660
								64	34960	16280	15200	13830	75.8	21280