

# SPRAYMAX

**FEATURE**

Higher NSD

**BENEFIT**

Longer life

**FEATURE**

Advanced VF technology

**BENEFIT**

40% more load carrying capability than a standard radial

**FEATURE**

Stepped lug design

**BENEFIT**

Better grip and traction



**FEATURE**

Advanced Lug Geometry

**BENEFIT**

Better roadability


**FEATURE**

Rounded shoulder

**BENEFIT**

Provides less soil and crop damage. Better grip

## MACHINERY

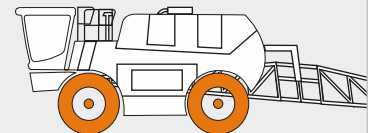

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD					MIXED APPLICATION				CYCLIC*	
			mm/in	mm/in					10	Up to 65 km/h	70	bar	10	
									6	Up to 40 km/h	43	psi	6	
VF 380/90R54	DW12 DW13	TL	383 15.1	2056 80.9	960 37.8	6201 244.1	176D	0.8	5910	2750	2570	2340	1.6	3600
								11	13020	6060	5660	5150	22.9	7930
								1.4	8370	3900	3640	3310	2.2	5100
								21	18440	8590	8020	7290	32.1	11230
								2.8	12600	5870	5480	4990	3.6	7670
								41	27750	12930	12070	10990	52.8	16890
								3.6	14440	6730	6280	5710	4.4	8790
								52	31810	14820	13830	12580	63.7	19360
								4.0	15390	7170	6690	6090	4.8	9370
								58	33900	15790	14740	13410	69.6	20640
								4.4	16330	7610	7100	6460	5.2	9940
								64	35970	16760	15640	14230	75.8	21890