

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT


40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction

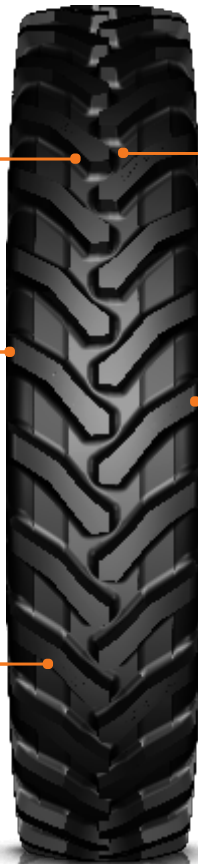

FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip

MACHINERY

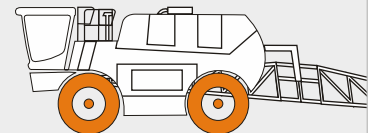

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD					MIXED APPLICATION				CYCLIC*	
			mm/in	mm/in					10	Up to 65 km/h	70	bar	10	
									6	Up to 40 km/h	43	psi	6	
VF 480/80R42	DW16 DW15	TL	479 18.9	1850 72.8	847 33.4	5550 218.5	176D	0.8	6670	3110	2900	2640	1.6	4060
								11	14690	6850	6390	5810	22.9	8940
								1.2	8580	4000	3730	3390	2.0	5220
								17	18900	8810	8220	7470	29.0	11500
								1.8	10930	5090	4750	4320	2.6	6650
								26	24070	11210	10460	9520	37.9	14650
								2.0	11570	5390	5030	4580	2.8	7040
								29	25480	11870	11080	10090	40.6	15510
								2.8	14100	6570	6130	5580	3.6	8580
								41	31060	14470	13500	12290	52.2	18900
								3.6	16330	7610	7100	6460	4.4	9940
								52	35970	16760	15640	14230	63.8	21890

All tires confirm ETRTO T&R & STRO standards