

# FARMAX RC

**FEATURES**

- High lug angle at centre
- More overlap at centre

**BENEFITS**

- Better roadability
- Better stability

**FEATURE**

- Rounded shoulder

**BENEFIT**

- Soil and plant protection

**FEATURE**

- Deep tread pattern

**BENEFIT**

- Long service life




**FEATURES**

- D-Rated tyres with maximum speed up to 40 MPH
- Strong nylon carcass and strong bead

**BENEFITS**

- Better roadability even at higher speed
- Better lateral and radial stability
- Minimum chances of any mechanical failure

## MACHINERY

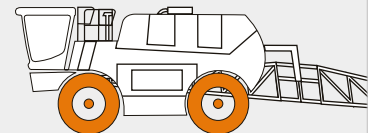

Sprayer

Size	Rim	Type	Infl tire dimension		Loaded Static Radius	Rolling Circumference	Load Index	Infl. Press	Recommend Load, kg (lbs)					
			SW	OD					Speed, km/h (mph)					
			mm/in	mm/in					mm/in	mm/in	speed symbol	bar psi	Field	10 6
210/ 95R44 (8.3 R 44)	W7	TL	214	1518	719	4626	120D/ 123A8	0.8	840	1100	870	800	770	730
								12	1850	2420	1920	1760	1700	1610
	1.2							1070	1400	1100	1020	980	930	
	1.7							2360	3080	2420	2250	2160	2050	
	1.8							1360	1770	1400	1290	1240	1180	
	2.6							3000	3900	3080	2840	2730	2600	
	2.4							1610	2100	1660	1530	1470	1400	
3.5	3550	4630	3660	3370	3240	3080								