

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT


40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction

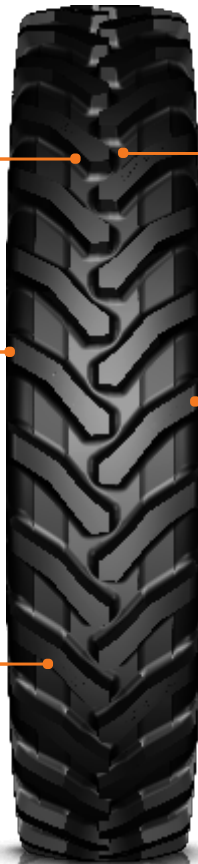

FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip

MACHINERY

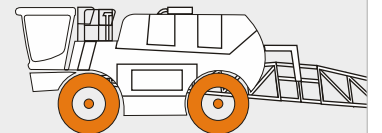

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD					MIXED APPLICATION				CYCLIC*	
			mm/in	mm/in					10	Up to 65 km/h	70	bar	10	
									6	Up to 40 km/h	43	psi	6	
VF 480/ 80R50	DW16 DW15	TL	479 18.9	2060 81.1	951 37.5	6148 242.1	179D	0.6	6230	2900	2710	2440	0.7	3790
								9	13720	6390	5970	5370	10.4	8350
								0.8	7380	3440	3210	2920	1.6	4490
								12	16260	7580	7070	6430	23.2	9890
								1.2	9360	4360	4070	3700	2.0	5700
								17	20620	9600	8960	8150	29.0	12560
								2.0	12630	5880	5490	5000	2.8	7690
								29	27820	12950	12090	11010	40.6	16940
								2.8	15390	7170	6690	6090	3.6	9370
								41	33900	15790	14740	13410	52.2	20640
								3.6	17830	8300	7750	7050	4.4	10850
								52	39270	18280	17070	15530	63.8	23900