

ROW CROP AG RADIAL

WITH THE POWER OF CTR* 230/95R48 FARMAX RC 136D/139A8

FEATURE

- Higher angle and lug overlap at centre

BENEFIT

- Better roadability and stability

FEATURE

- Higher number of lugs

BENEFIT

- Superior traction

FEATURE

- Rounded shoulder

BENEFIT

- Reduced crop damage



FEATURE

- D-rated (65 kmph) tyres

BENEFIT

- Improved transportation speed

FEATURE


- Strong carcass and bead

BENEFIT

- Higher load carrying capacity

MACHINERY

2WD Tractor
4WD Tractor
MFWA (Mechanical front wheel assist)
Self propelled sprayer & towed sprayer

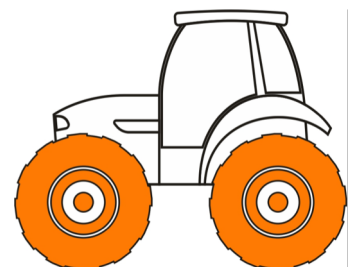

TECHNICAL SPECIFICATION

SIZE	230/95R48 (9.5 R 48)
PATTERN	FARMAX RC
TREAD DESIGN	TRACTOR R1
TT/TL	TL

Size	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circum	PR, Stars Load Index	Infl. Press	Recommend load, kg (lbs)						
		SW	OD					Speed, km/h (mph)						
		mm / in	mm / in					mm / in	mm / in	Speed	bar	field	10	25
230/95R48	W7 ,W8	228	1657	785	5049	136D/ 139A8	2.8	bar	2090	2730	2160	1990	1910	1820
							41	psi	4600	6010	4760	4380	4210	4010
							3.2	bar	2270	2960	2330	2160	2070	1970
							46	psi	5000	6520	5130	4760	4560	4340
							3.6	bar	2430	3170	2500	2310	2220	2110
							52	psi	5350	6980	5510	5090	4890	4650
							4	bar	2580	3360	2650	2450	2350	2240
							58	psi	5680	7400	5840	5400	5180	4930

All tires confirms ETRTO T&RA & STRO standards



CEAT Limited Is One Of The Leading Manufacturers Established In 1958 CEAT Is A Part Of RPG Enterprises, Among The Top 5 Business Houses In India With A Group Turn Over Of USD 2.5billion. CEAT 57 Years Of Experience, CEAT serves customers in 102 countries across 5 plants and wide range of tires in all segments like Truck Bus Bias and Radial, SUV, Passengers, 2&3 Wheelers, Floatation, Mining, Earthmover, Farm and Other Special Application off the Road Tires.