

FARMAX RC

FEATURES

- High lug angle at centre
- More overlap at centre

BENEFITS

- Better roadability
- Better stability

FEATURE

- Rounded shoulder

BENEFIT

- Soil and plant protection

FEATURE

- Deep tread pattern

BENEFIT

- Long service life




FEATURES

- D-Rated tyres with maximum speed up to 40 MPH
- Strong nylon carcass and strong bead

BENEFITS

- Better roadability even at higher speed
- Better lateral and radial stability
- Minimum chances of any mechanical failure

MACHINERY

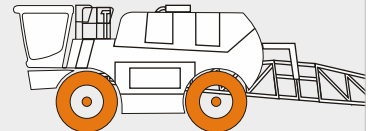

Sprayer

Size	Rim	Type	Infl tire dimension		Loaded Static Radius	Rolling Circumference	Load Index	Infl. Press	Recommend Load, kg (lbs)						
			SW	OD					Speed, km/h (mph)						
			mm/in	mm/in					Field	10	25	40	50	65	70
380/ 90R50 (14.9R50)	W12	TL	390	1954	918	5951	151D/ 154A8	1.8	3360	4380	3460	3200	3070	2920	2660
								26	7400	9650	7620	7050	6760	6430	5860
	W11		2	3570	4650	3670	3390	3260	3100	2820					
			29	7860	10240	8080	7470	7180	6830	6210					
	W13		2.2	3770	4920	3890	3590	3440	3280	2980					
			32	8300	10840	8570	7910	7580	7220	6560					
	2.4		3970	5180	4090	3780	3620	3450	3140						
	35		8740	11410	9010	8330	7970	7600	6920						