

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage.
Better grip

MACHINERY

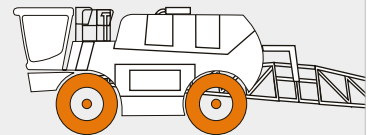

Sprayer

Size	LI/SS	Type	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
				SW	OD				MIXED APPLICATION			CYCLIC*		
				mm/in	mm/in				10	Up to 65	70	bar	10	
VF-380/ 90R46	173 D	TL	DW12 DW13	383	1852	858 33.8	5586 219.9	bar	10	Up to 65	70	bar	10	
				psi	6			Up to 40	43	psi	6			
				0.8	2350			2350	2120	0.9	3290			
				1.1	5180			5180	4670	12.5	7250			
				1.4	3330			3330	3000	1.5	4660			
				2.1	7330			7330	6610	21.7	10260			
				2.8	5010			5010	4510	2.9	7010			
				4.1	11040			11040	9930	42.4	15440			
				3.6	5740			5740	5170	3.7	8040			
				5.2	12640			12640	11390	53.2	17710			
				4.0	6120			6120	5510	4.1	8570			
				5.8	13480			13480	12140	59.2	18880			
4.4	6500	6500	5850	4.5	9100									
6.4	14320	14320	12890	65.4	20040									

All tires confirms ETRTO T&RA & STRO standards