

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip

MACHINERY

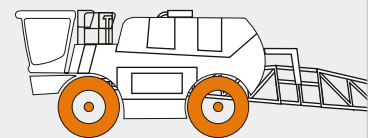

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD					MIXED APPLICATION			CYCLIC*		
			mm/in	mm/in					static	Up to 65 km/h Up to 40 km/h	70 43	bar psi	10 6	
VF 480 80R42	DW15	TL	479	1850	847	5550	162D	0.8	6670	2900	2640	0.9	4060	
	11							14690	6390	5810	13.6	8940		
	1.2							8580	3730	3390	1.4	5220		
	17							18900	8220	7470	20.9	11500		
	1.8							10930	4750	4320	2.2	6650		
	26							24070	10460	9520	31.6	14650		