

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip

MACHINERY

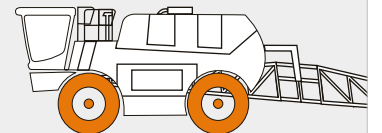

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)				
			SW	OD					MIXED APPLICATION		CYCLIC*		
									mm/in	mm/in	static	Up to 65 km/h Up to 40 km/h	70 43
VF 480/ 80R50	DW16	TL	479	2060	951	6148	179D	0.8	7380	3210	2890	1	4490
								12	16260	7070	6370	13.9	9890
	1.2							9360	4070	3660	1.4	5700	
	17							20620	8960	8060	20.9	12560	
	2							12630	5490	4940	2.4	7690	
	29							27820	12090	10880	34.8	16940	
	2.8							15390	6690	6020	3.4	9370	
	41							33900	14740	13260	48.7	20640	
	3.6							17830	7750	6980	4.3	10850	
52	39270	17070	15370	62.6	23900								