

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage.
Better grip

MACHINERY

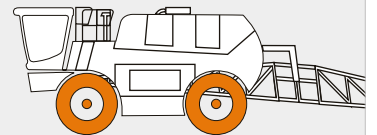

Sprayer

Size	LI/SS	Type	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
				SW	OD				MIXED APPLICATION				CYCLIC*	
				mm/in	mm/in				static	Up to 65	70	bar	10	
										Up to 40	43			psi
VF-380/ 90R54	176 D	TL	DW12 DW13	383	2056	960 37.8	6201 244.1	0.8	5910	2570	2310	1.6	3600	
				15.1	80.9			11	13020	5660	5090	22.9	7930	
								1.4	8370	3640	3280	2.2	5100	
								21	18440	8020	7220	32.1	11230	
								2.8	12600	5480	4930	3.6	7670	
								41	27750	12070	10860	52.8	16890	
								3.6	14440	6280	5650	4.4	8790	
								52	31810	13830	12440	63.7	19360	
								4.0	15390	6690	6020	4.8	9370	
								58	33900	14740	13260	69.6	20640	
								4.4	16330	7100	6390	5.2	9940	
								64	35970	15640	14070	75.8	21890	

All tires confirms ETRTO T&RA & STRO standards