

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip

MACHINERY

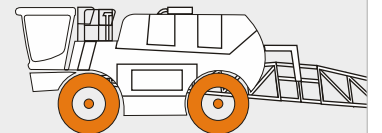

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD					MIXED APPLICATION				CYCLIC*	
			mm/in	mm/in					10	Up to 65 km/h	70	bar	10	
									6	Up to 40 km/h	43	psi	6	
VF 480/80R46	DW16 DW15	TL	479 18.9	1950 76.8	897 35.3	5838 229.8	177D	0.8	7660	3570	3330	3030	1.6	4660
								12	16870	7860	7330	6670	23.2	10260
								1.0	8720	4060	3790	3450	1.8	5310
								15	19210	8940	8350	7600	26.1	11700
								1.2	9710	4520	4220	3840	2.0	5910
								17	21390	9960	9300	8460	29.0	13020
								1.4	10630	4950	4620	4200	2.2	6470
								20	23410	10900	10180	9250	31.9	14250
								1.6	11500	5360	5000	4550	2.4	7000
								23	25330	11810	11010	10020	34.8	15420
								2.4	13250	6170	5760	5240	3.2	8060
								35	29190	13590	12690	11540	46.4	17750
								3.0	15090	7030	6560	5970	3.8	9180
								44	33240	15480	14450	13150	55.1	20220
								3.6	16790	7820	7300	6640	4.4	10220
								52	36980	17220	16080	14630	63.8	22510