

FARMAX RC

FEATURES

- High lug angle at centre
- More overlap at centre

BENEFITS

- Better roadability
- Better stability

FEATURE

- Rounded shoulder

BENEFIT

- Soil and plant protection

FEATURE

- Deep tread pattern

BENEFIT

- Long service life




FEATURES

- D-Rated tyres with maximum speed up to 40 MPH
- Strong nylon carcass and strong bead

BENEFITS

- Better roadability even at higher speed
- Better lateral and radial stability
- Minimum chances of any mechanical failure

MACHINERY

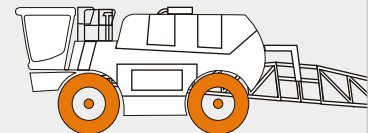

Sprayer

Size	Rim	Type	Infl tire dimension		Loaded Static Radius	Rolling Circumference	Load Index	Infl. Press	Recommend Load, kg (lbs)					
			SW	OD					Speed, km/h (mph)					
			mm/in	mm/in					mm/in	mm/in	speed symbol	bar psi	Field	10 6
210/95R36 (8.3 R 36)	W7	TL	214	1310	616	3992	118D/121A8	0.8	700	920	720	670	640	610
	12							1540	2030	1590	1480	1410	1340	
	1.6							1060	1380	1090	1010	970	920	
	23							2330	3040	2400	2220	2140	2030	
	2.4							1330	1740	1370	1270	1220	1160	
	35							2930	3830	3020	2800	2690	2560	
	3							1520	1980	1560	1450	1390	1320	
44	3350	4360	3440	3190	3060	2910								