

FARMAX RC

FEATURES

- High lug angle at centre
- More overlap at centre

BENEFITS

- Better roadability
- Better stability

FEATURE

- Rounded shoulder

BENEFIT

- Soil and plant protection

FEATURE

- Deep tread pattern

BENEFIT

- Long service life




FEATURES

- D-Rated tyres with maximum speed up to 40 MPH
- Strong nylon carcass and strong bead

BENEFITS

- Better roadability even at higher speed
- Better lateral and radial stability
- Minimum chances of any mechanical failure

MACHINERY

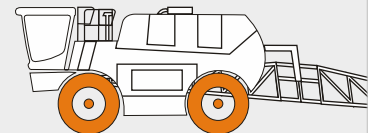

Sprayer

Size	Rim	Type	Infl tire dimension		Loaded Static Radius	Rolling Circumference	Load Index	Infl. Press	Recommend Load, kg (lbs)							
			SW	OD					Speed, km/h (mph)							
			mm/in	mm/in					Field	10	25	40	50	65	70	
380/ 90R50 (14.9R50)	W12	TL	390	1954	918	5951	158D/ 161A8	2.4	3360	4380	3460	3200	3070	2920	2660	
								35	7400	9650	7620	7050	6760	6430	5860	
	W11	TL	15.4	76.9	36.1	234.3	161A8	2.8	3670	4790	3780	3490	3350	3190	2900	
								41	8080	10550	8330	7690	7380	7030	6390	
	W13	TL	15.4	76.9	36.1	234.3	161A8	161A8	3.2	3970	5180	4090	3780	3620	3450	3140
									46	8740	11410	9010	8330	7970	7600	6920
	W13	TL	15.4	76.9	36.1	234.3	161A8	161A8	3.6	4890	6380	5040	4650	4460	4250	3870
									52	10770	14050	11100	10240	9820	9360	8520

All tires confirms ETRTO T&RA & STRO standards