

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability


FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage.
Better grip

MACHINERY

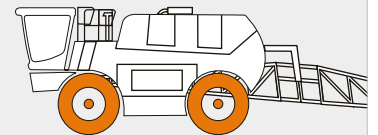

Sprayer

Size	LI/SS	Type	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
				SW	OD				MIXED APPLICATION				CYCLIC*	
				mm/in	mm/in				Up to 65		70	bar	10	
									static	Up to 40	43	psi	6	
VF-380/ 90R50	175 D	TL	DW12 DW13	383	1954	909	5872	0.8	5750	2500	2250	1.6	3500	
				15.1	76.9	35.8	231.2	11	12670	5510	4960	22.9	7710	
								1.4	8140	3540	3190	2.2	4960	
								21	17930	7800	7030	32.1	10930	
								2.8	12240	5320	4790	3.6	7450	
								41	26960	11720	10550	52.8	16410	
								3.6	14030	6100	5490	4.4	8540	
								52	30900	13440	12090	63.7	18810	
								4.0	14950	6500	5850	4.8	9100	
								58	32930	14320	12890	69.6	20040	
								4.4	15870	6900	6210	5.2	9660	
								64	34960	15200	13680	75.8	21280	

All tires confirms ETRTO T&RA & STRO standards