

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability

FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip


FEATURE

Steel belted radial construction

BENEFIT

Protection from Punctures

MACHINERY

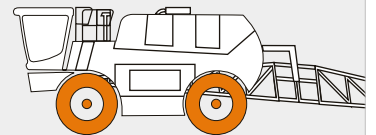

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)					
			SW	OD					MIXED APPLICATION				CYCLIC*	
			mm/in	mm/in					static	Up to 65 km/h	70	bar	10	
			mm/in	mm/in										Up to 40 km/h
VF 380 90R46 SB*	DW12 DW13	TL	383	1852	858 33.8	5586 219.9	173D	0.8	5410	2350	2120	0.9	3290	
			11	11920					5180	4670	13.6	7250		
	1.4		7660	3330				3000	1.7	4660				
			21	16870				7330	6610	24.6	10260			
	2.8		11520	5010				4510	3.4	7010				
			41	25370				11040	9930	49.5	15440			
	3.6		13200	5740				5170	4.3	8040				
			52	29070				12640	11390	62.5	17710			
	4.0		14080	6120				5510	4.8	8570				
			58	31010				13480	12140	69.6	18880			
	4.4		14950	6500				5850	5.3	9100				
			64	32930				14320	12890	77.1	20040			

* SB - Steel belted

All tires confirms ETRTO T&RA & STRO standards