

SPRAYMAX

FEATURE

Higher NSD

BENEFIT

Longer life

FEATURE

Advanced VF technology

BENEFIT

40% more load carrying capability than a standard radial

FEATURE

Stepped lug design

BENEFIT

Better grip and traction



FEATURE

Advanced Lug Geometry

BENEFIT

Better roadability

FEATURE

Rounded shoulder

BENEFIT

Provides less soil and crop damage. Better grip


FEATURE

Steel belted radial construction

BENEFIT

Protection from Punctures

MACHINERY

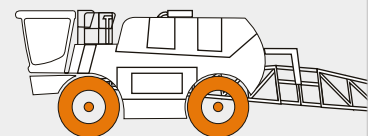

Sprayer

Size	Rim	Type	Unloaded dimension		Loaded Static Radius	Rolling Circumference	Load Index Speed Symbol	Infl. Press.	Maximum load, kg (lbs) Speed, km/h (mph)				
			SW	OD					MIXED APPLICATION		CYCLIC*		
			mm/in	mm/in					static	Up to 65 km/h Up to 40 km/h	70 43	bar psi	10 6
VF 480/80R46 SB*	DW16 DW15	TL	479	1950	897	5838	164D	0.8	7660	3330	3000	1	4660
			18.9	76.8	35.3	229.8		12	16870	7330	6610	13.9	10260
			1	8720	3790	3410		1.2	5310				
			15	19210	8350	7510		17.4	11700				
			1.2	9710	4220	3800		1.4	5910				
			17	21390	9300	8370		20.9	13020				
			1.4	10630	4620	4160		1.7	6470				
			20	23410	10180	9160		24.4	14250				
			1.6	11500	5000	4500		1.9	7000				
			23	25330	11010	9910		27.8	15420				

* SB - Steel belted

All tires confirms ETRTO T&RA & STRO standards