RPG

FARMAX RC

CEAT SPECIALTY

FEATURES
- High lug angle at centre
- More overlap at centre

BENEFITS
- Better roadability
- Better stability

FEATURE
- Rounded shoulder

BENEFIT
- Soil and plant protection

FEATURE
- Deep tread pattern

BENEFIT
- Long service life

FEATURES
- D-Rated tyres with maximum speed up to 40 MPH
- Strong nylon carcass and strong bead

BENEFITS
- Better roadability even at higher speed
- Better lateral and radial stability
- Minimum chances of any mechanical failure

MACHINERY

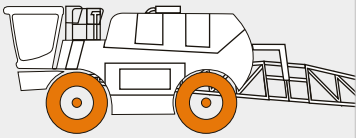

Sprayer

Size	Rim	Type	Infl tire dimension		Loaded Static Radius	Rolling Circum-ference	Load Index	Infl. Press	Recommend Load, kg (lbs)						
			SW	OD					Speed, km/h (mph)						
			mm/in	mm/in	mm/in	mm/in	speed	bar	Field	10	25	40	50	65	70
							symbol	psi		6	16	25	31	40	43
380/ 90R46 (14.9R46)	W11 W12 W13	TL	380 15.0	1852 72.9	864 38.4	5466 217.6	162D/ 165A8	0.8	1910	2490	1970	1820	1740	1660	1510
								12	4210	5480	4340	4010	3830	3660	3330
								1.6	2860	3740	2950	2730	2610	2490	2270
								23	6300	8240	6500	6010	5750	5480	5000
								2.4	3630	4740	3740	3460	3320	3160	2880
								35	8000	10440	8240	7620	7310	6960	6340
								3.6	4610	6020	4750	4390	4210	4010	3650
								52	10150	13260	10460	9670	9270	8830	8040
								4	4910	6410	5060	4680	4480	4270	3890
								58	10810	14120	11150	10310	9870	9410	8570
								4.8	5460	7130	5630	5200	4990	4750	4320
								70	12030	15700	12400	11450	10990	10460	9520

All tires confirms ETRTO T&RA & STRO standards