

FLOATMAX FT AG RADIAL

WITH THE POWER OF CTR* 600/55R26.5 FLOATMAX FT 165D

FEATURE

- Directional lug

BENEFIT

- Superior traction

FEATURE

- Robust centre blocks

BENEFIT

- Better stability and roadability



FEATURE

- Higher rubber mass

BENEFIT

- Longer life

FEATURE

- Rounded shoulder

BENEFIT

- Lesser damage to soil and crop

FEATURE

- Wider and flatter crown

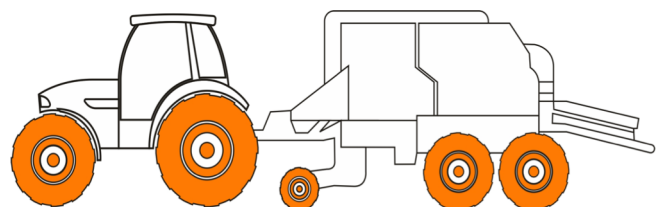
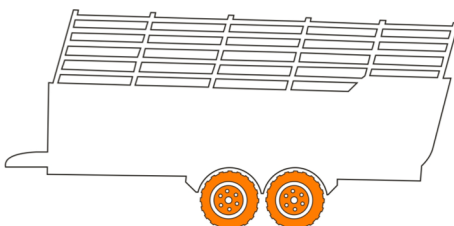
BENEFIT

- Better floating characteristics

*Lower Compaction, Higher Traction and Better Roadability



MACHINERY

Baler
Trailer



TECHNICAL SPECIFICATION

SIZE	600/55R26.5
PATTERN	FLOATMAX FT
TREAD DESIGN	I-3
TT/TL	TL

Size	Rim	Unloaded		Loaded	Rolling	Load		Recommended load, kg (lbs)					
		dimension		Static	Circum	Index	Infl.	Speed, km/h (mph)					
		SW	OD	Radius			press.	MIXED APPLICATION					
		mm	mm	mm	mm	Speed	bar	Static	10	30	40	50	65
		in	in	in	in	Symbol	psi						
600/55R26.5	AG20.00	620 24.4	1336 52.6	608 24.0	4050 159.5	165D  165D 	1.2	5840	4570	3840	3450	3070	2540
							17	12860	10070	8460	7600	6760	5590
							1.6	6920	5420	4550	4090	3640	3010
							23	15240	11940	10020	9010	8020	6630
							2.4	8790	6880	5770	5200	4620	3820
							35	19360	15150	12710	11450	10180	8410
							2.8	9610	7520	6310	5680	5060	4180
							41	21170	16560	13900	12510	11150	9210
							3.6	11130	8710	7310	6580	5860	4840
							52	24520	19190	16100	14490	12910	10660
							4	11850	9270	7780	7000	6230	5150
							58	26100	20420	17140	15420	13720	11340

All tires confirms ETRTO T&RA & STRO standards



CEAT Limited Is One Of The Leading Manufacturers Established In 1958 CEAT Is A Part Of RPG Enterprises, Among The Top 5 Business Houses In India With A Group Turn Over Of USD 2.5billion. CEAT 57 Years Of Experience, CEAT serves customers in 102 countries across 5 plants and wide range of tires in all segments like Truck Bus Bias and Radial, SUV, Passengers, 2&3 Wheelers, Floatation, Mining, Earthmover, Farm and Other Special Application off the Road Tires.