

ROW CROP AG RADIAL

WITH THE POWER OF CTR* 270/95R46 FARMAX RC 141D/144A8

FEATURE

- Higher angle and lug overlap at centre

BENEFIT

- Better roadability and stability

FEATURE

- Higher number of lugs

BENEFIT

- Superior traction

FEATURE

- Rounded shoulder

BENEFIT

- Reduced crop damage



FEATURE

- D-rated (65 kmph) tyres

BENEFIT

- Improved transportation speed

FEATURE


- Strong carcass and bead

BENEFIT

- Higher load carrying capacity

MACHINERY

2WD Tractor
4WD Tractor
MFWA (Mechanical front wheel assist)
Self propelled sprayer & towed sprayer

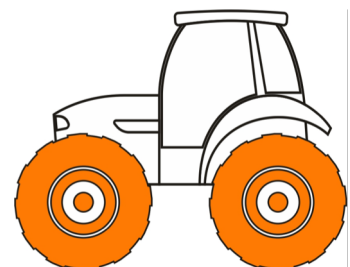

TECHNICAL SPECIFICATION

SIZE	270/95R46 (11.2R46)
PATTERN	FARMAX RC
TREAD DESIGN	TRACTOR R1
TT/TL	TL

Size	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circum	PR, Load Index	Infl. Press	Recommend load, kg (lbs)						
		SW	OD					Speed, km/h (mph)						
		mm / in	mm / in					mm / in	mm / in	Speed Symbol	bar	psi	Field	10
270/95R46 (11.2R46)	W9 W8 W10	275 10.8	1682 66.2	790 31.1	5126 201.8	141D/ 144A8	2.8	2400	3140	2480	2290	2190	2090	1900
							41	5290	6920	5460	5040	4820	4600	4190
							3.6	2780	3630	2870	2650	2540	2420	2200
							52	6120	8000	6320	5840	5590	5330	4850
							4	2960	3860	3050	2820	2700	2575	2340
							58	6520	8500	6720	6210	5950	5670	5150

All tires confirms ETRTO T&RA & STRO standards



CEAT Limited Is One Of The Leading Manufacturers Established In 1958 CEAT Is A Part Of RPG Enterprises, Among The Top 5 Business Houses In India With A Group Turn Over Of USD 2.5billion. CEAT 57 Years Of Experience, CEAT serves customers in 102 countries across 5 plants and wide range of tires in all segments like Truck Bus Bias and Radial, SUV, Passengers, 2&3 Wheelers, Floatation, Mining, Earthmover, Farm and Other Special Application off the Road Tires.