

FLOATMAX FT AG RADIAL

WITH THE POWER OF CTR* 560/60R22.5 FLOATMAX FT 161D

FEATURE

- Directional lug

BENEFIT

- Superior traction

FEATURE

- Robust centre blocks

BENEFIT

- Better stability and roadability



FEATURE

- Higher rubber mass

BENEFIT

- Longer life

FEATURE

- Rounded shoulder

BENEFIT

- Lesser damage to soil and crop

FEATURE

- Wider and flatter crown

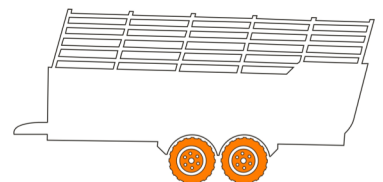
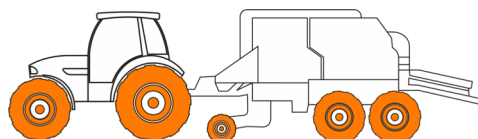
BENEFIT

- Better floating characteristics

*Lower Compaction, Higher Traction and Better Roadability



MACHINERY

Baler
Trailer



TECHNICAL SPECIFICATION

SIZE	560/60R22.5
PATTERN	FLOATMAX FT
TREAD DESIGN	I-3
TT/TL	TL

Size	Rim	Unloaded		Loaded	Rolling	Load	Infl. press.	Recommended load, kg (lbs)						
		dimension		Static	Circum	Index		Speed, km/h (mph)						
		SW	OD	Radius				MIXED APPLICATION						
		mm	mm	mm	mm	Speed		Static	10	30	40	50	65	
		in	in	in	in	Symbol	bar	psi						
560/60R22.5	AG16.00	543 21.4	1244 49.0	561 22.1	3810 150.0	161D  161D 	1.2	5270	4120	3460	3110	2770	2290	
							17	11610	9070	7620	6850	6100	5040	
							1.6	6230	4880	4090	3690	3280	2710	
							23	13720	10750	9010	8130	7220	5970	
							2.4	7910	6190	5190	4680	4160	3440	
							35	17420	13630	11430	10310	9160	7580	
							2.8	8650	6770	5680	5110	4550	3760	
							41	19050	14910	12510	11260	10020	8280	
							3.6	10010	7830	6570	5920	5260	4350	
							52	22050	17250	14470	13040	11590	9580	
4	10640	8330	6980	6290	5600	4625								
58	23440	18350	15370	13850	12330	10190								

All tires confirms ETRTO T&RA & STRO standards



CEAT Limited Is One Of The Leading Manufacturers Established In 1958 CEAT Is A Part Of RPG Enterprises, Among The Top 5 Business Houses In India With A Group Turn Over Of USD 2.5billion. CEAT 57 Years Of Experience, CEAT serves customers in 102 countries across 5 plants and wide range of tires in all segments like Truck Bus Bias and Radial, SUV, Passengers, 2&3 Wheelers, Floatation, Mining, Earthmover, Farm and Other Special Application off the Road Tires.