

# ROW CROP AG RADIAL

WITH THE POWER OF CTR\* 320/90 R42 FARMAX RC 144D/147A8

## FEATURE

- Higher angle and lug overlap at centre

## BENEFIT

- Better roadability and stability

## FEATURE

- Higher number of lugs

## BENEFIT

- Superior traction

## FEATURE

- Rounded shoulder

## BENEFIT

- Reduced crop damage



## FEATURE

- D-rated (65 kmph) tyres

## BENEFIT

- Improved transportation speed

## FEATURE


- Strong carcass and bead

## BENEFIT

- Higher load carrying capacity

## MACHINERY

2WD Tractor  
4WD Tractor  
MFWA (Mechanical front wheel assist)  
Self propelled sprayer & towed sprayer

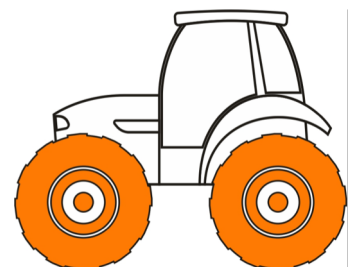

# TECHNICAL SPECIFICATION

SIZE	320/90 R42
PATTERN	FARMAX RC
TREAD DESIGN	TRACTOR R1
TT/TL	TL

Size	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circum	PR, Load Index	Infl. Press	Recommend load, kg (lbs)						
		SW	OD					Speed, km/h (mph)						
		mm / in	mm / in					mm / in	mm / in	Speed	bar	Field	10	25
320/90R42	W10, W9, W11	319 12.6	1643 64.7	764 30.1	4950 194.9	144D/ 147A8	2.8	2770	3620	2860	2640	2530	2410	2190
							41	6100	7970	6300	5810	5570	5310	4820
							3.2	3000	3920	3090	2860	2740	2610	2380
							46	6610	8630	6810	6300	6040	5750	5240
							3.6	3220	4200	3320	3070	2940	2800	2550
							52	7090	9250	7310	6760	6480	6170	5620

All tires confirms ETRTO T&RA & STRO standards



CEAT Limited Is One Of The Leading Manufacturers Established In 1958 CEAT Is A Part Of RPG Enterprises, Among The Top 5 Business Houses In India With A Group Turn Over Of USD 2.5billion. CEAT 57 Years Of Experience, CEAT serves customers in 102 countries across 5 plants and wide range of tires in all segments like Truck Bus Bias and Radial, SUV, Passengers, 2&3 Wheelers, Floatation, Mining, Earthmover, Farm and Other Special Application off the Road Tires.