

# ROW CROP AG RADIAL

WITH THE POWER OF CTR\* 230/95R32 FARMAX RC 128D/131A8

**FEATURE**

- Higher angle and lug overlap at centre

**BENEFIT**

- Better roadability and stability

**FEATURE**

- Higher number of lugs

**BENEFIT**

- Superior traction

**FEATURE**

- Rounded shoulder

**BENEFIT**

- Reduced crop damage



**FEATURE**

- D-rated (65 kmph) tyres

**BENEFIT**

- Improved transportation speed

**FEATURE**


- Strong carcass and bead

**BENEFIT**

- Higher load carrying capacity

## MACHINERY

2WD Tractor  
4WD Tractor  
MFWA (Mechanical front wheel assist)  
Self propelled sprayer & towed sprayer

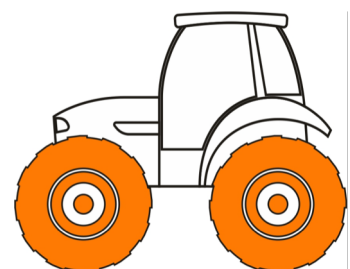

# TECHNICAL SPECIFICATION

SIZE	230/95R32 (9.5R32)
PATTERN	FARMAX RC
TREAD DESIGN	TRACTOR R1
TT/TL	TL

Size	Rim	Unloaded dimension		Loaded Static Radius	Rolling Circum	PR, Load Index	Infl. Press	Recommend load, kg (lbs)						
		SW	OD					Speed, km/h (mph)						
		mm / in	mm / in					mm / in	mm / in	Speed	bar	Field	10	25
230/95R32	W7	228	1251	588	3808	128D/ 131A8	2.8	1680	2190	1730	1600	1530	1460	1330
							41	3700	4820	3810	3520	3370	3220	2930
	W8	9.0	49.3	23.1	149.9		3.6	1940	2540	2000	1850	1770	1690	1540
							52	4270	5590	4410	4070	3900	3720	3390
	4	2070	2700	2130	1970		1890	1800	1640					
	58	4560	5950	4690	4340		4160	3960	3610					

All tires confirms ETRTO T&RA & STRO standards



CEAT Limited Is One Of The Leading Manufacturers Established In 1958 CEAT Is A Part Of RPG Enterprises, Among The Top 5 Business Houses In India With A Group Turn Over Of USD 2.5billion. CEAT 57 Years Of Experience, CEAT serves customers in 102 countries across 5 plants and wide range of tires in all segments like Truck Bus Bias and Radial, SUV, Passengers, 2&3 Wheelers, Floatation, Mining, Earthmover, Farm and Other Special Application off the Road Tires.